




PUIaudio



Data Sheet

AR01330MR


Features:

- Low 2mm height
- High 117 dB output with 800mV in Artificial Ear (1cm)
- High energy neodymium magnet
- Wide frequency range of 20Hz to 20,000Hz


Specifications

Parameters	Values	Units
Rated Input Power	5	mWatts
Max Input Power	10	mWatts
Impedance	$30 \pm 15\%$	Ohms
Sensitivity (SPL @ 1kHz, 1mV)	117 ± 3	dB Pa/V
Resonant Frequency	$260 \pm 20\%$	Hz
Frequency Range	20 ~ 20,000	Hz
Distortion (@ 50 ~ 10000 Hz/ 5mW)	3% Max	-
Frame Material	A3 Metal	-
Magnet Material	NdFeB	-
Diaphragm Material	PET	-
Weight	1.2	Grams
Environmental Compliances	ROHS/REACH	-
Buzz, Rattle, etc.	Should not be audible with 380 mV sine wave from 50 Hz to 4 kHz	-
Polarity	When positive voltage is applied to the positive terminal, the diaphragm will move outward	-
Operating Temperature	-20 ~ +60	°C
Storage Temperature	-20 ~ +60	°C

Measurement Method (measured with 500mV, Temperature: 25 ~ 35°C, Relative Humidity: 25%~75%)

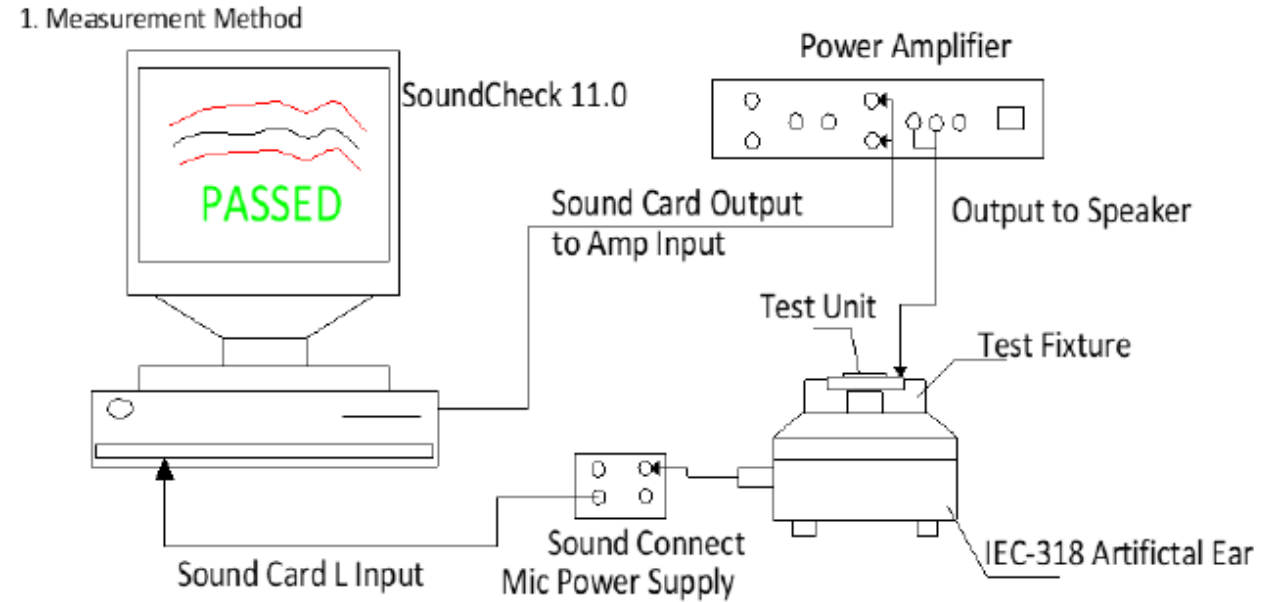

Frequency Response (measured at 1mV)

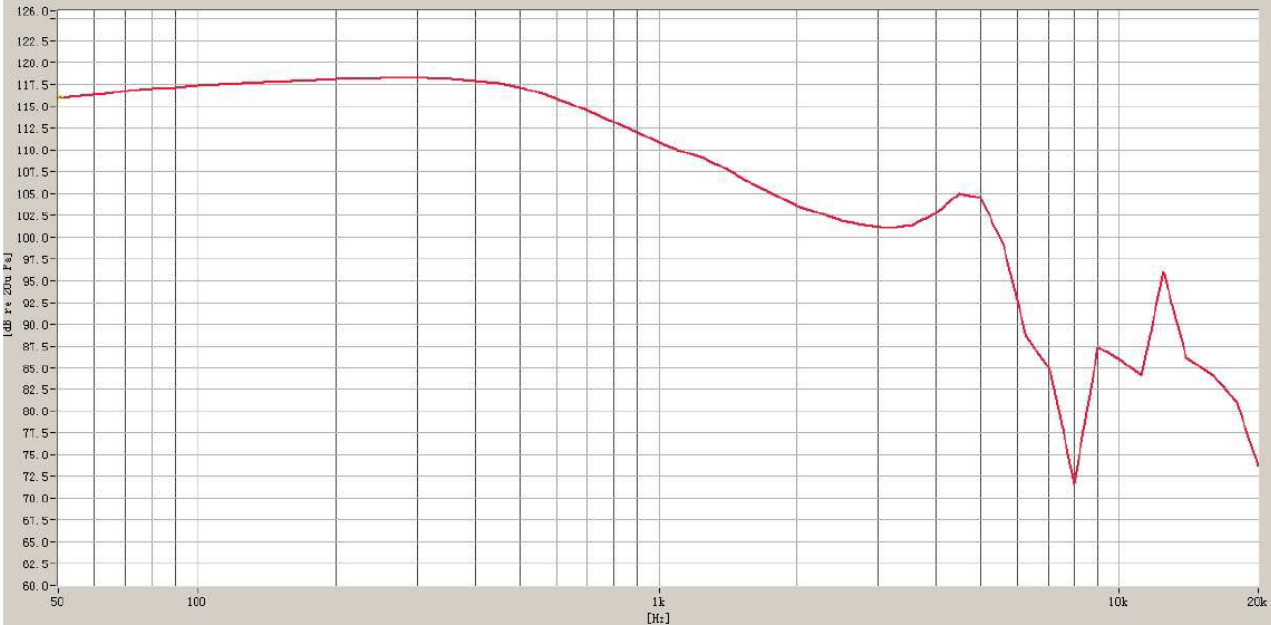


Reliability Testing

Type of Test	Test Specifications
High Temperature Test	48 hours at $+60^{\circ}\text{C} \pm 2^{\circ}\text{C}$
Low Temperature Test	48 hours at $-20^{\circ}\text{C} \pm 2^{\circ}\text{C}$
Humidity Test	24 hours at $+50^{\circ}\text{C} \pm 2^{\circ}\text{C}$ with relative humidity at 90~95% relative humidity
Temperature Cycle Testing	The part shall be subjected to 15 cycles. One cycle shall be 2 hours and consist of: $50^{\circ}\text{C}+1^{\circ}\text{C}/0.5\text{h} \rightarrow 20^{\circ}\text{C}/0.5\text{h} \rightarrow -20^{\circ}\text{C}/0.5\text{h} \rightarrow 20^{\circ}\text{C}/0.5\text{h}$
Vibration Test	Frequency 15~55 Hz, Amplitude 1.5 mm for 2 hours
Drop Test	100 cm free fall on concrete floor, 10 times

After each test, the speaker's SPL shall be ± 4 dB of the original SPL after 1 hour of recovery.


Dimensions

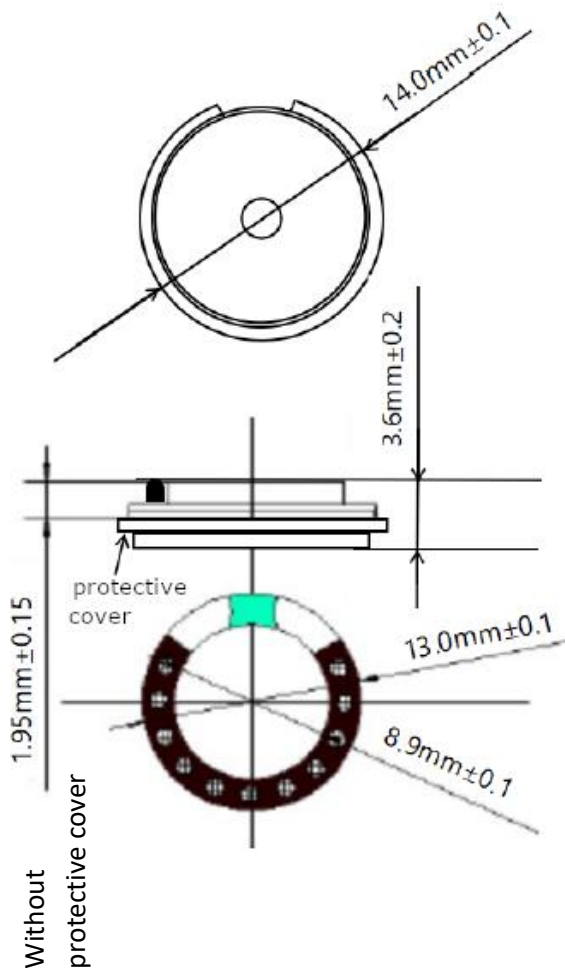

Remove protective cover before use



Packaging

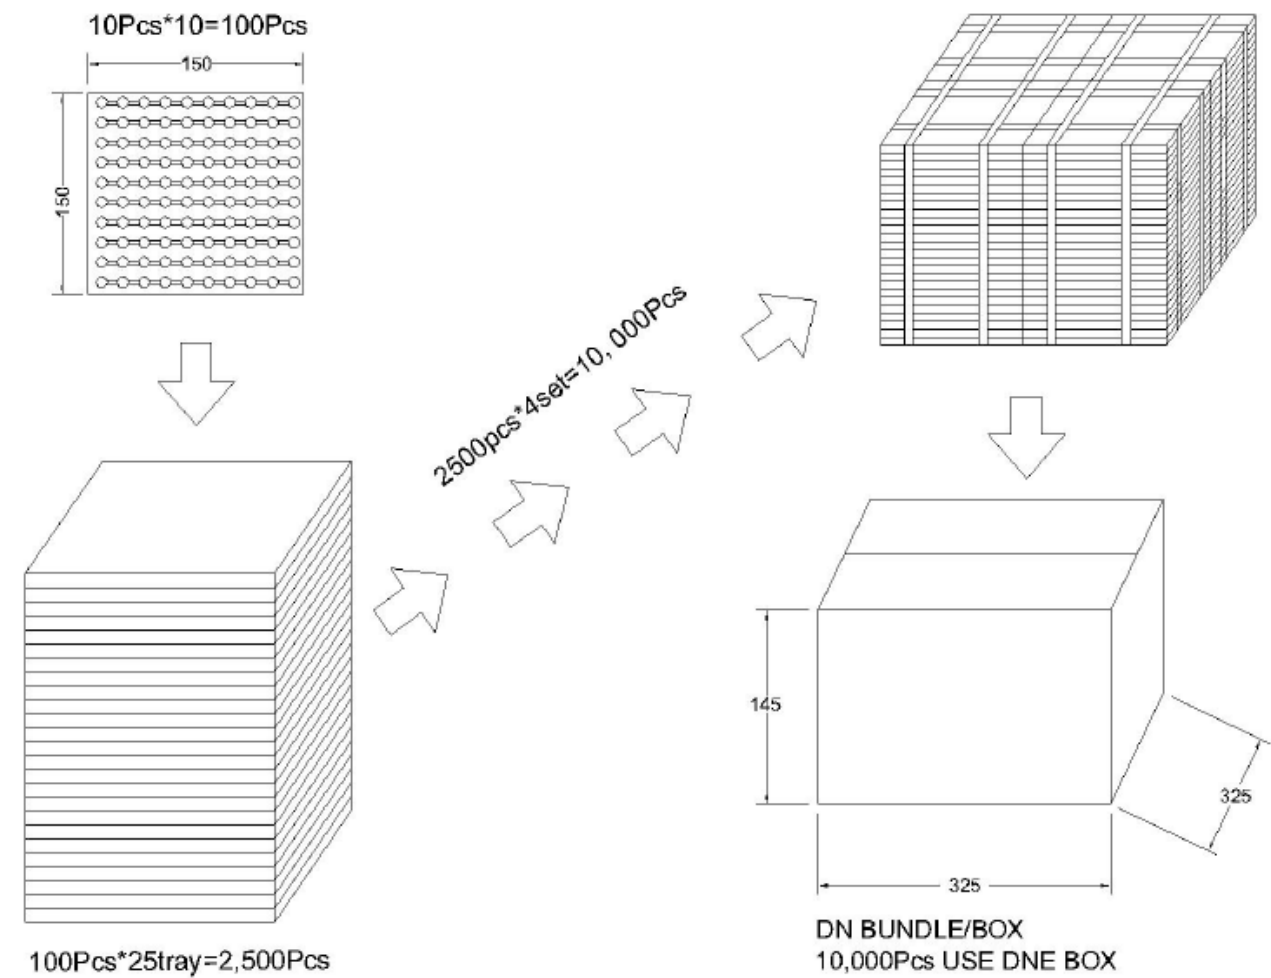

Specifications Revisions

Revision	Description	Date	Approved
A	Released from Engineering	3/21/2025	JD
B	Revised Sensitivity and drawing	6/13/2025	JD

- Note:
- 1. Unless otherwise specified:
 - A. All dimensions are in millimeters.
 - B. Default tolerances are $\pm 0.5\text{mm}$ and angles are $\pm 3^\circ$.
 - 2. Specifications subject to change or withdrawal without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Speakers & Transducers](#) category:

Click to view products by [PUI Audio](#) manufacturer:

Other Similar products are found below :

[1000](#) [1004](#) [1138](#) [1157](#) [1179](#) [1450069](#) [2000](#) [2007](#) [2008](#) [2011](#) [2012](#) [2015](#) [2016](#) [2017](#) [2036](#) [2037](#) [2040](#) [2041](#) [2050](#) [2054](#) [2054](#) [2060](#) [2061](#)
[2062](#) [2086](#) [2087](#) [2088](#) [2091](#) [2092](#) [2096](#) [2100](#) [2101](#) [2102](#) [2103](#) [2110](#) [2113](#) [2127](#) [2128](#) [2129](#) [2130](#) [2133](#) [2136](#) [2148](#) [2149](#) [2204](#) [2205](#)
[2207](#) [2210](#) [2231](#) [2235](#)