



Data Sheet	LAI-2540-PG-WP
------------	----------------



PUI Audio's Lighted Buzzer is designed for low current consumption while delivering high output at 4000 Hz in a panel mount configuration for easy installation.

- Low current draw of less than 20mA at 12 VDC.
- Minimum 94 dBA output with 12 VDC input at 10 cm
- -20°C to +70°C operating temperature.

Specifications

Parameters	Values	Units
Rated Voltage	12	VDC
Operating Voltage Range	3 ~ 15	VDC
Current Draw at Rated Voltage	≤20	mA
Minimum SPL @ 30cm	≥85	dBA
Resonant Frequency	4000 ± 300	Hz
Housing Material	PC Plastic Resin	-
Weight	17.8	Grams
Tone	Constant	-
LED Color	Green	-
Environmental Compliances	RoHS	-
IP Rating (Waterproof)	IP68	-
Storage Temperature	-30 ~ +80	°C
Operating Temperature	-20 ~ +70	°C

Measurement Method (12 VDC, 30cm)

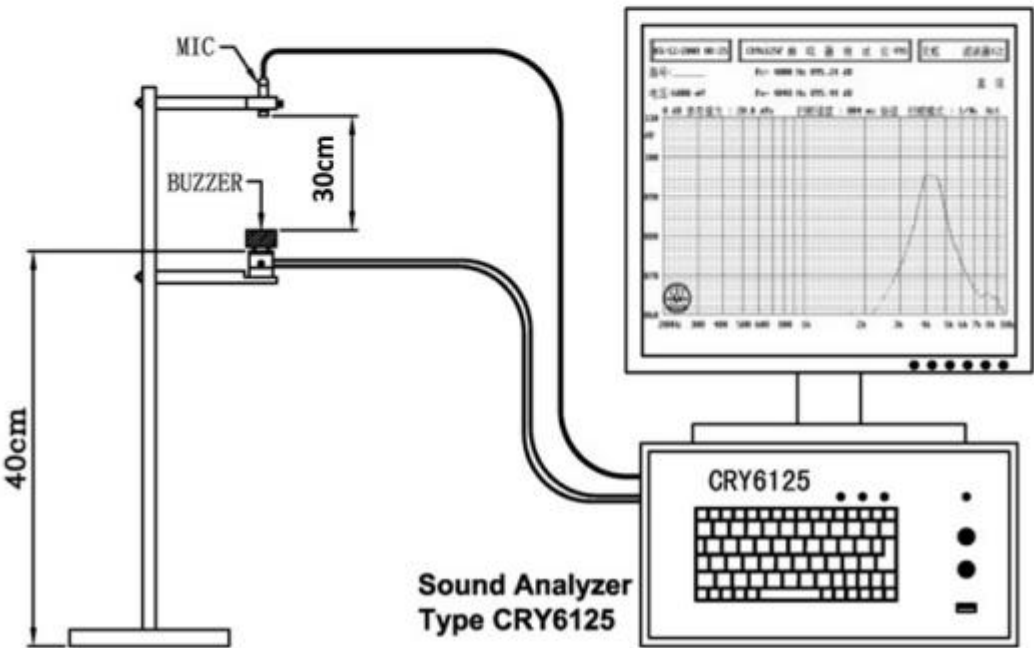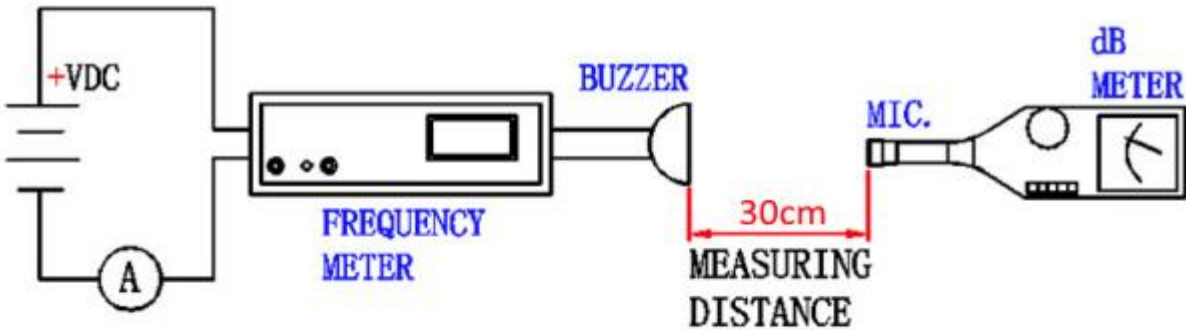


Reliability Testing

Type of Test	Test Specifications
High Temperature Test	The part shall be exposed to +80°C for 98 hours, then to room temperature for 2 hours.
Low Temperature Test	The part shall be exposed to -30°C for 98 hours, then to room temperature for 2 hours.
Humidity Test	The part shall be exposed to 40°C for 98 hours with 95%RH, then to room temperature for 2 hours.
Vibration Test	The part shall be subjected to a vibration cycle of 2000 cycles per minute, at an amplitude of 2mm applied in X, Y and Z directions, for 30 minutes each. For a total of 90 minutes.
Drop Test	Drop part from 75cm height onto the ground.
Durability Test	The part shall be tested after 98 hours of actual continuous operation, at standard measurement conditions.

After the test the part shall meet specifications without any degradation in appearance and performance.

Dimensions (Tolerance: ±0.5mm Except when Specified)

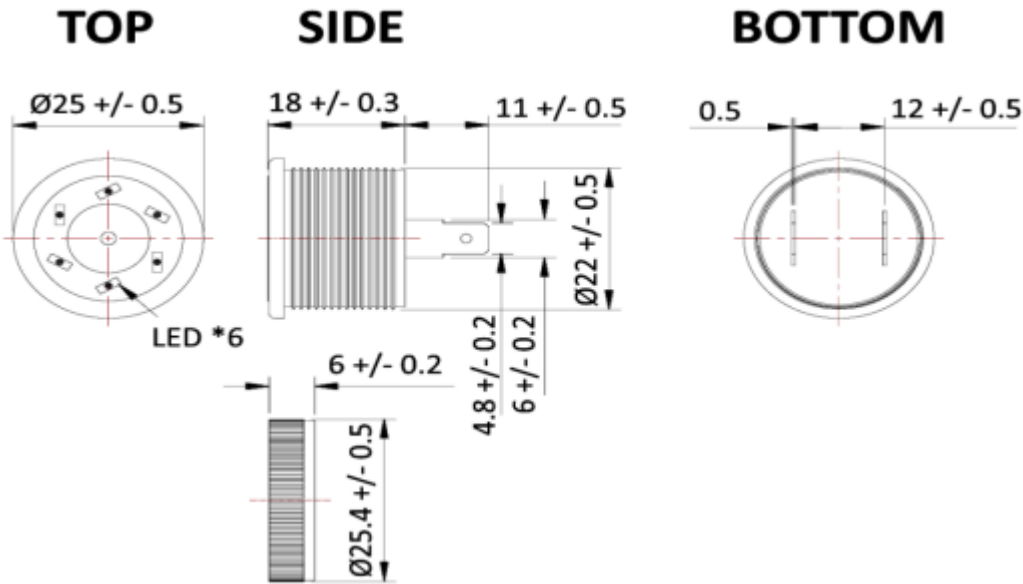

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Buzzers & Audio Indicators - Board Mount](#) ***category:***

Click to view products by [PUI Audio](#) ***manufacturer:***

Other Similar products are found below :

[FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PT-3534FP](#) [SC110E](#) [SC616N-2](#) [SCS045MD9DT3S](#) [F/BC 35-DR LF](#) [F/EB20P-DR LF](#)
[FSMD8585JSLF](#) [F/TCW 05 WITH LABEL LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [F-B-P1405ISB LF](#) [F/DGX 05P WITH LABEL LF](#) [F/HCW 06 WITH LABEL LF](#) [DMT-1606S-NL](#) [SBM616J](#) [SBM616PU](#) [SC250H](#) [SC628FK](#)
[32S4120LFPN](#) [PLD-27N35PQ](#) [SMA-17-S](#) [SC235AF](#) [SMA21-P175](#) [1602AC-23-18E-26.000000G](#) [710000013](#) [710100108](#) [710121005](#)
[205311](#) [HNR-1704A](#) [KC1206 16](#) [FUET-1760](#) [FUET-1030H](#) [CPT-1117-83-SMT-TR](#) [CMA-6542PF](#) [CEM-1212S](#) [CMT-4023S-SMT-TR](#)
[CMT-8504-100-SMT-TR](#) [CX-0905C](#) [FMB09A12-12V](#) [FSD-5037](#) [FUET-1365F-05](#) [FSD-3020-12V](#) [SEA-0955Y-0527-16-50P4.0](#) [KC1206R](#)
[42](#) [FSD-2316-24V](#) [LEB1370BS-1.5S-2.4-R](#) [LEB1310BS-05S-2.4-R](#)