



Data Sheet	LAI-3330-PR-WP
------------	----------------


PUI Audio's Lighted Buzzer is designed for low current consumption while delivering high output at 3000 Hz in a panel mount configuration for easy installation.

- Low current draw of less than 25 mA at 12 VDC
- Minimum 104 dBA output with 12 VDC input at 10 cm.
- -20°C to +70°C operating temperature

Specifications

Parameters	Values	Units
Rated Voltage	12	VDC
Operating Voltage Range	3 ~ 15	VDC
Current Draw at Rated Voltage	≤25	mA
Minimum SPL @ 30cm	≥95	dBA
Resonant Frequency	3000 ± 500	Hz
Housing Material	PC (Red + Black)	-
Weight	17.8	Grams
Tone	Constant	-
LED Color	Red	-
Environmental Compliances	RoHS	-
IP Rating (Waterproof)	IP68	-
Storage Temperature	-30 ~ +80	°C
Operating Temperature	-20 ~ +70	°C

Measurement Method (12 VDC, 10cm)

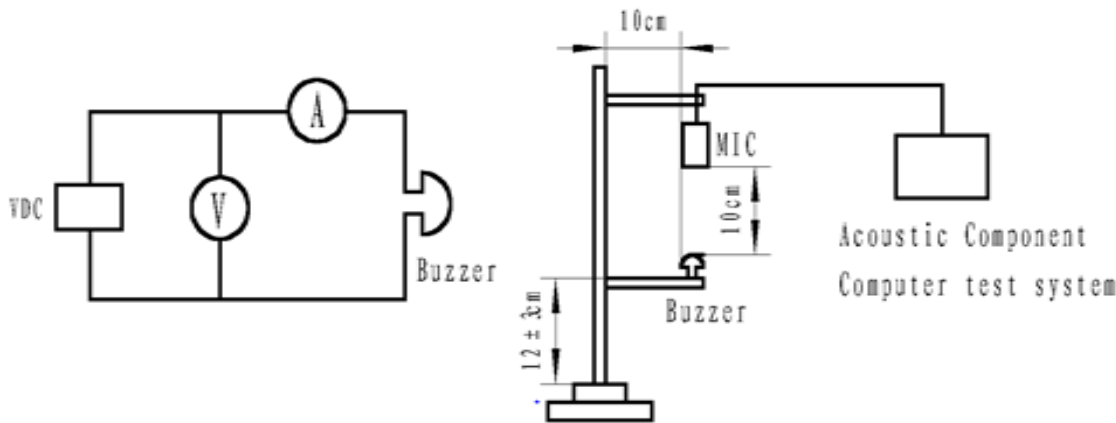

Reliability Testing

Type of Test	Test Specifications
High Temperature Test	The part shall be capable of withstanding a storage temperature of +80°C for 96 hours
Low Temperature Test	The part shall be capable of withstanding a storage temperature of -40°C for 96 hours
Humidity Test	40±2°C, 90~95% RH, 96 hours
Temperature Cycle Testing	Total 5 cycles, 1 cycle containing: -40±2°C, 30 minutes 20±5°C, 15 minutes 80±2°C, 30 minutes 20±5°C, 15 minutes
Vibration Test	The part shall be subjected to a vibration cycle of 10Hz in a period of 1 minute. Total peak amplitude shall be 1.52 mm (9.3g). The vibration test shall consist of 2 hours per plane in each three mutually perpendicular planes for a total time of 6 hours
Shock Test	Part shall be measured after being applied a shock (980m/s ²) for each three mutually perpendicular directions to each of 3 times by half sine wave.
Drop Test	Drop part from 700mm height onto the surface of 10mm thick wooden board. 2 directions-upper and side of the part are to be applied.
Solderability Test	Soldering temp.:260±5°C Heat applying time: 3±0.5sec.

After the test the part shall meet specifications without any degradation in appearance and performance except SPL shall be initial value±5dB.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Buzzers & Audio Indicators - Industrial](#) ***category:***

Click to view products by [PUI Audio](#) ***manufacturer:***

Other Similar products are found below :

[ESZ-26B](#) [ESZ-25B-5-250B](#) [EWP-202C](#) [EBPT-407](#) [BRP2212L-12-C](#) [CPT-1604-10L100](#) [56-61000-00.22](#) [AI-2628-TF-LW100-WP-R](#)
[4890060](#) [PK-27A35EWBQ](#) [ZT016LDCTR](#) [ZT016LDSR8R](#) [22MMGASKET](#) [SCE028LD3CL1F](#) [SSX-82SC](#) [ZT028LAFP1Y](#) [SSX-82SA](#)
[SCS045MD1MGCS](#) [XB5KSB](#) [713100113](#) [PT-723B-76Q](#) [PT-593SQ](#) [PK-35H29WQ](#) [PK-26N04W-06VQ](#) [PK-26N04W-03VQ](#) [PK-](#)
[27N35EPQ](#) [PK-26N04W-24VQ](#) [PNR1](#) [ACC02](#) [710100113](#) [PB-32N10W-12K](#) [SC628AHJR](#) [ZA048SADP2](#) [SCH110NR](#) [SSX-52SB](#) [SSX-](#)
[82SR](#) [AI-4429-P-CP12-2-R](#) [M22-AMC](#) [PK-27A35EPDGQ](#) [PK-27A35EPDBQ](#) [PK-35A29W-24VQ](#) [14-810.910](#) [SC648](#) [SC628AN](#) [SC628N](#)
[SC110N](#) [SC628ANP](#) [HW1Z-P1F2PQ4Y](#) [PFD-27A35ERQ](#) [BNR1](#)