

Description: 1608 Diplexer**PART NUMBER: DPX1608LKF3R2460A****Features:**

- Compact Size
- Low loss
- High Soldering Heat Resistance

Applications:

- WLAN

ELECTRICAL SPECIFICATIONS**Low-Band**

Item	Frequency Range (MHz)	Min.	Typ.	Max.
Insertion loss (dB)	2400~2500	-	0.74	0.85
Insertion Loss (dB) at -40~85°C	2400~2500	-	-	1.00
Return loss (dB)	2400~2500	13	20.7	-
Attenuation (dB)	30~1000	12	15.1	-
	4800~5000	35	40.6	-
	5000~7125	30	36.9	-
	7200~7500	35	46.4	-
	7500~12000	18	20.3	-

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Do, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg, 4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998



Description: 1608 Diplexer

PART NUMBER: DPX1608LKF3R2460A

ELECTRICAL SPECIFICATIONS

High-Band

Item	Frequency Range (MHz)	Min.	Typ.	Max.
Insertion loss (dB)	4900~5150	-	0.95	1.20
	5150~6300	-	0.78	1.00
Insertion loss (dB) at -40~85°C	4900~5150	-	-	1.35
	5150~6300	-	-	1.15
Return loss (dB)	4900~6300	11	16.5	-
Attenuation (dB)	70~1000	40	52.7	-
	1000~2400	40	48.0	-
	2400~2500	35	48.0	-
	9800~10300	30	36.3	-
	10300~12700	30	36.3	-
	14700~18900	12	16.3	-

Common

Item	Frequency Range (MHz)	Min.	Typ.	Max.
Return loss (dB)	2400~2500	13	17.8	-
	4900~6300	11	17.2	-



Isolation

Item	Frequency Range (MHz)	Min.	Typ.	Max.
HB to LB (dB)	2400~2500	35	44.8	-
	4800~5150	30	38.6	-
	5150~5950	30	36.5	-
	5950~6300	30	37.5	-
	11900~14250	15	19.2	-
	15000~18000	15	18.7	-

*Impedance for port1 = Match to client's chipset

Operating Temperature Range : -40~85°C

Power Capacity : 3W max.

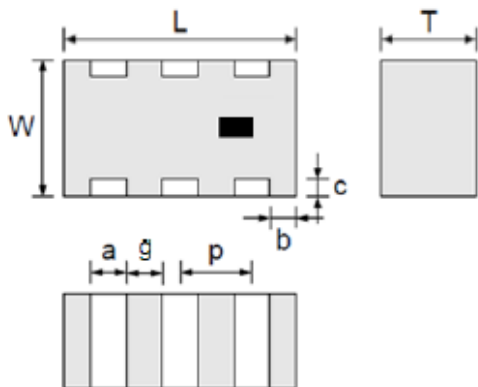
Description: 1608 Diplexer
PART NUMBER: DPX1608LKF3R2460A
MECHANICAL DIMENSION
Outline

Dimension

L	W	T	a
1.60±0.10	0.80±0.10	0.70 max.	0.20±0.10
b	c	g	p
0.20±0.15	0.15±0.10	0.30±0.10	0.50±0.05



NOTE : Dimensions in mm.

Termination

Top View


Terminal name
Function

1	Low band
2	GND
3	High band
4	GND
5	Common
6	GND

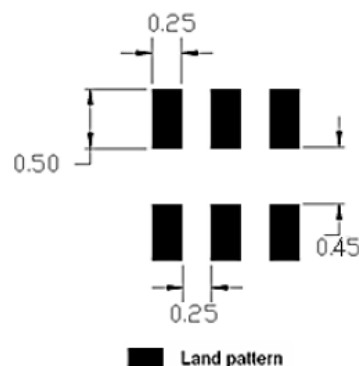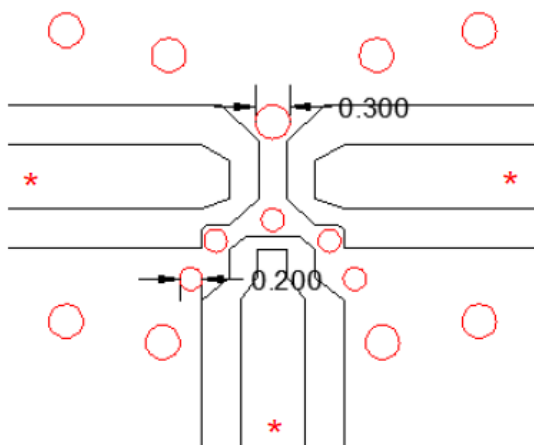Reference design of EVB


Unit : mm

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 1608 Diplexer


PART NUMBER: DPX1608LKF3R2460A

MEASURING DIAGRAM

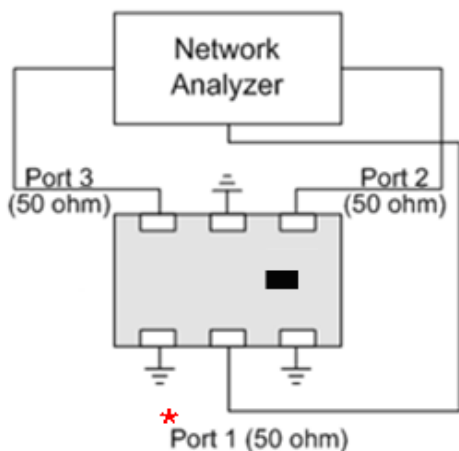

Test Instrument :
Agilent E5071C Network Analyzer or equivalent.
*Impedance for port1 = Match to client's chipset

ELECTRICAL PERFORMANCES

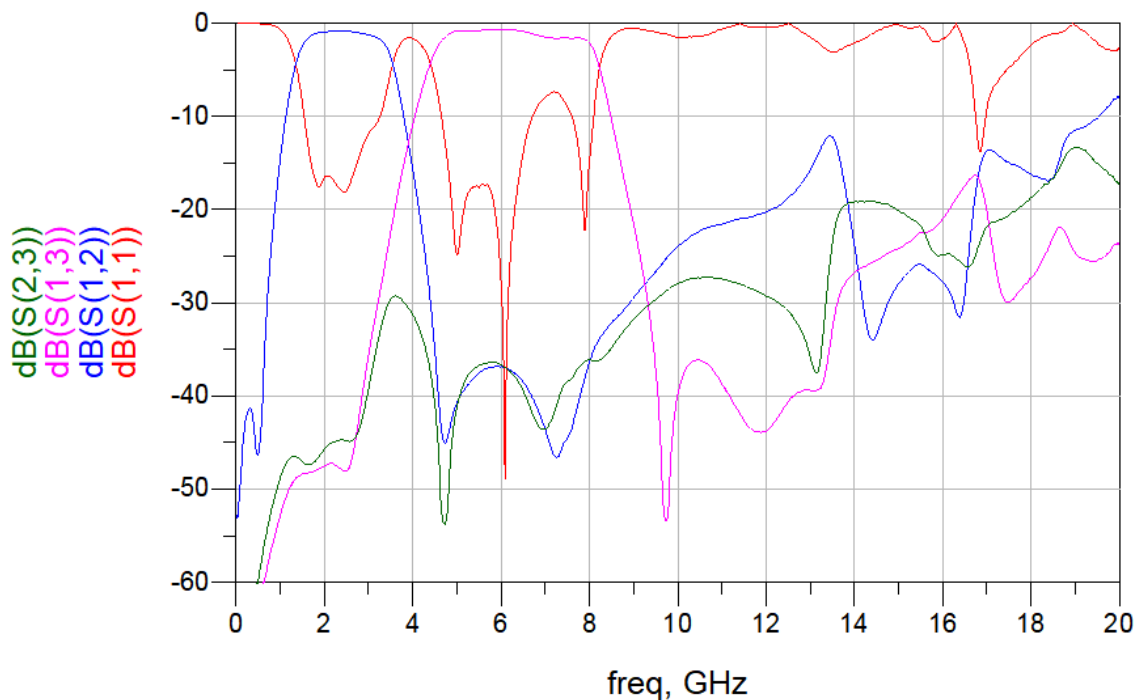


Description: 1608 Diplexer

PART NUMBER: DPX1608LKF3R2460A


PACKING SPECIFICATION

Peel-off force

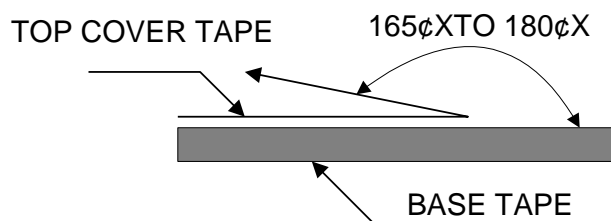

The force for peeling of cover tape is 10 grams in the arrow direction.


Dimension (Unit: mm)

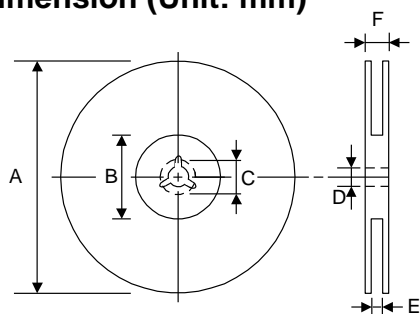

TYPE	A	B	C	D	E	F
8 mm	178±1	60+0.5 -0	-	13±0.2	9±0.5	12±0.5
12 mm	178±0.3	60±0.2	19.3±0.1	13.5±0.1	13.6±0.1	-

Taping quantity

SERIES	5824 5724	5320 5220	4532	4516	3225	3216 2520	2012 1608	1005 0605
PCS/Reel	5000	3000	1000	2000	2500	3000	4000	10000

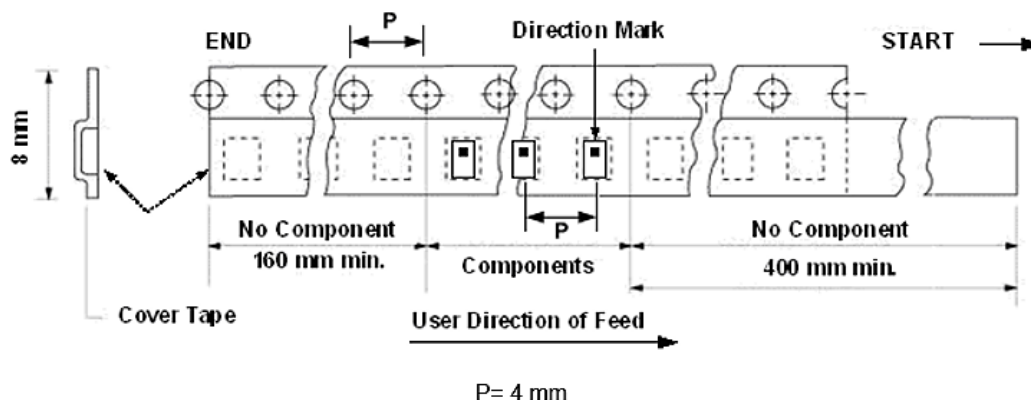

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 1608 Diplexer**PART NUMBER:** DPX1608LKF3R2460A**REVISION HISTORY**

Revision	Date	Description
Version 1	Apr. 13, 2022	- New issue

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Pulse](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#)
[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#)
[BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [MACP-008125-CK07F0](#) [DS-329-PIN](#) [TP-101-PIN](#)
[8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#) [CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#)
[B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#) [B39781B8005P810](#) [B39881B8013P810](#) [B39791B8039P810](#)
[B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#)