

**Description: 1608 Diplexer**
**PART NUMBER: DPX1608LWFPR2455L**
**Features:**

- Compact Size
- Low loss
- High Soldering Heat Resistance

**Applications:**

- LTE

**ELECTRICAL SPECIFICATIONS**

Item	Frequency Range	Insertion Loss	Return Loss	Stop-Band Attenuation
Common to Low Freq. Port	2400~2500 MHz	0.4 dB max.	12.74 dB min.	20 dB min. at 4900~5850 MHz
Common to High Freq. Port	4900~5850 MHz	0.6 dB max.	10.16 dB min.	20 dB min. at 2400~2500 MHz
Common Port	2400~2500 MHz	-	12.74 dB min.	-
	4900~5850 MHz	-	10.16 dB min.	-

Operating Temperature Range : -40~85°C  
 Power Capacity : 3W max.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:


Pulse Worldwide Headquarters  
 15255 Innovation Drive #100  
 San Diego, CA 92128  
 USA  
 Tel: 1-858-674-8100

Pulse/Larsen Antennas  
 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250  
 Vancouver, WA 98683  
 USA  
 Tel: 1-360-944-7551

Europe Headquarters  
 Pulse GmbH & Do, KG  
 Zeppelinstrasse 15  
 Herrenberg, Germany  
 Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.  
 99 Huo Ju Road(#29 Bldg, 4<sup>th</sup> Phase  
 Suzhou New District  
 Jiangsu Province, Suzhou 215009 PR China  
 Tel: 86 512 6807 9998

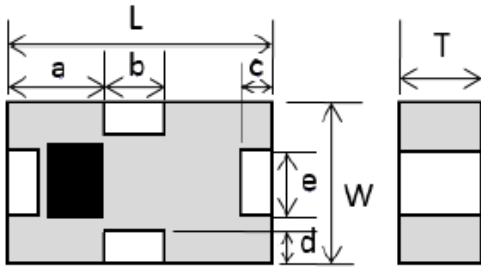


**Description: 1608 Diplexer**
**PART NUMBER: DPX1608LWFPR2455L**
**MECHANICAL DIMENSION**
**Outline**

**Dimension**

L	W	T	a
1.60±0.10	0.80+0.20 -0.10	0.60+0.05 -0.10	0.65±0.15
b	c	d	e
0.30+0.10 -0.15	0.15±0.10	0.15±0.10	0.30+0.10 -0.15



NOTE : Dimensions in mm.


**Termination**

Top View


**Terminal name**
**Function**

1	High band
2	Common
3	Low band
4	GND

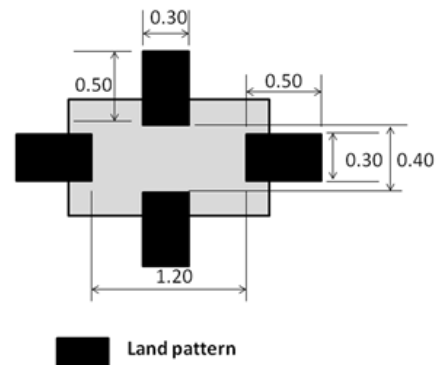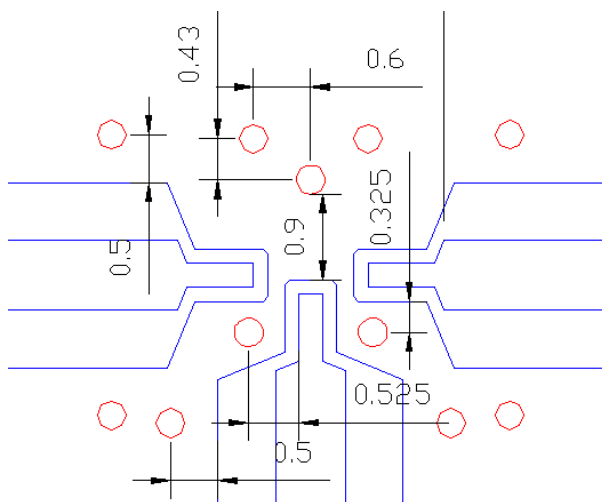**Reference design of EVB**


Unit : mm

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

## Description: 1608 Diplexer


**PART NUMBER: DPX1608LWFPR2455L**

### MEASURING DIAGRAM

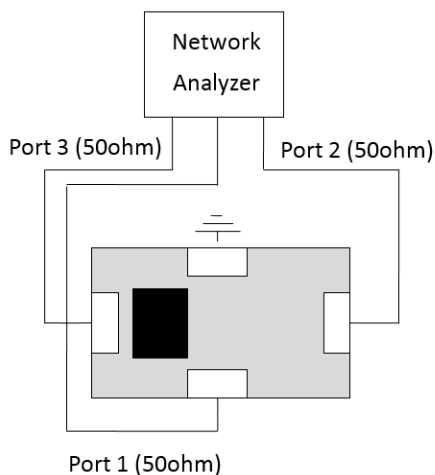

Test Instrument :  
Agilent E5071C Network Analyzer or equivalent.

### ELECTRICAL PERFORMANCES

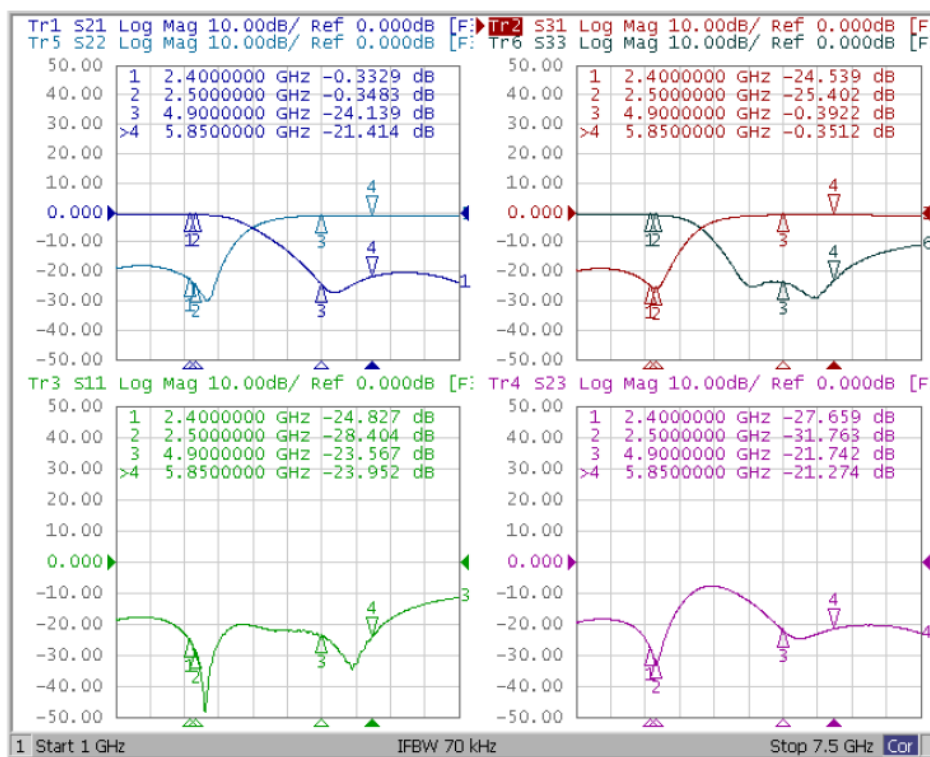

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

## Description: 1608 Diplexer

**PART NUMBER: DPX1608LWFPR2455L**


### PACKING SPECIFICATION

#### Peel-off force

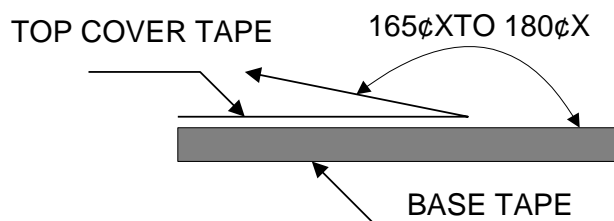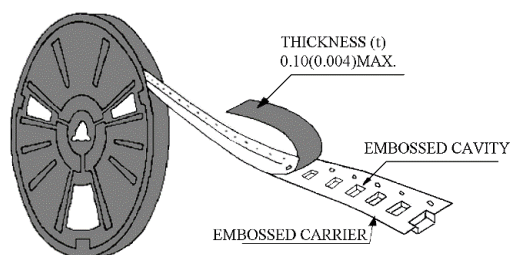

The force for peeling of cover tape is 10 grams in the arrow direction.


#### Dimension (Unit: mm)

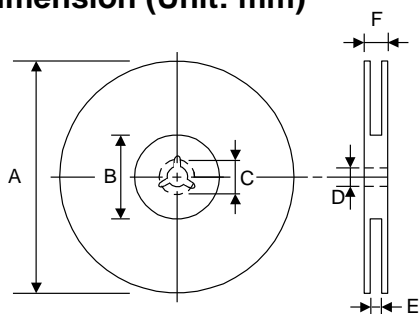

TYPE	A	B	C	D	E	F
8 mm	178±1	60+0.5 -0	-	13±0.2	9±0.5	12±0.5
12 mm	178±0.3	60±0.2	19.3±0.1	13.5±0.1	13.6±0.1	-

#### Taping quantity

SERIES	5824 5724	5320 5220	4532	4516	3225	3216 2520	2012 1608	1005 0605
PCS/Reel	5000	3000	1000	2000	2500	3000	4000	10000

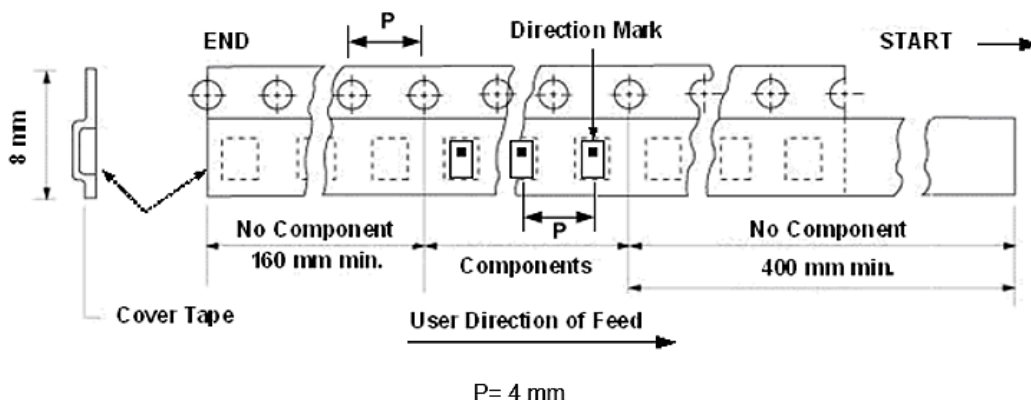

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

**Description:** 1608 Diplexer**PART NUMBER:** DPX1608LWFPR2455L**REVISION HISTORY**

Revision	Date	Description
Version 1	Jun. 22, 2022	- New issue

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [Pulse](#) manufacturer:*

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)  
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#)  
[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#)  
[BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [MACP-008125-CK07F0](#) [DS-329-PIN](#) [TP-101-PIN](#)  
[8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#) [CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#)  
[B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#) [B39781B8005P810](#) [B39881B8013P810](#) [B39791B8039P810](#)  
[B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#)