

Low Profile WiFi Antenna N-Female Connector

LPTNG2400/71DMN: 2400-2500 and 4900-7125MHz



Features & Applications:

- ISM band radios
- DSRC
- WLAN, WIFI 6E / 7
- Indoor and outdoor use IP67 rated
- IoT, M2M, industrial metering, base stations

Electrical specifications @ 25° C – Operating Temperatures – 40°C to +80°C

Frequency Bands – 2400-2500MHz

Antenna type ²	Nominal Impedance	Polarization	Radiation pattern	Power withstanding	DC Ground
Monopole	50Ω	Linear	Omni	3W	No

Port	Frequency (MHz)	2400-2500	4900-7125
Port 1	VSWR	< 2	< 2.5
	Return Loss(dB)	< -10	< -7.5
	Avg. Peak Gain (dBi)	2.3	4.1
	Avg. Efficiency (%)	82	82

Mechanical Specifications

Orderable PN: LPTNG2400/71DMN

Dimension with connector (Diameter x Total Height)	Color	Connector Type	Fixing System	Ingress Protection
Φ45.5X62.84mm	Black	N-Female	Direct Mount	IP67
Height installed	Weight	Operating temp	Storage temp	Mounting hole dia
34.5mm	113 grams	-40°C to 85°C	-40°C to 85°C	Φ15.9 mm (0.625")

Family Products – LPT WiFi

LPT WiFi 6E17 Products-2400-2500/4900-7125MHZ

Orderable P/N	No. of Total Ports	Siso/MiMo	Cable length	Connector	Ground Independent	Note
LPT2400/71DMN	1	Siso	No	N-Female	No	
LPTNG2400/71DMN	1	Siso	No	N-Female	Yes	
LPTNG24-71DMG0457	1	Siso	457mm(1.5Ft)	SMA-Male	Yes	
LPTNG2471M2DMG0457	2	2xMiMo	457mm(1.5Ft)	SMA-Male	Yes	

Notes:


- Measured on 60mm round ground plane, 60mm washer is included on product package.
- LPTNG2400/71DMN comes in black, for white add the suffix W and PN becomes LPTNG2400/71DMNW.

Low Profile WiFi Antenna N-Female Connector

LPTNG2400/71DMN: 2400-2500 and 4900-7125MHz

Mechanical Drawing

LPTNG2400/71DMN

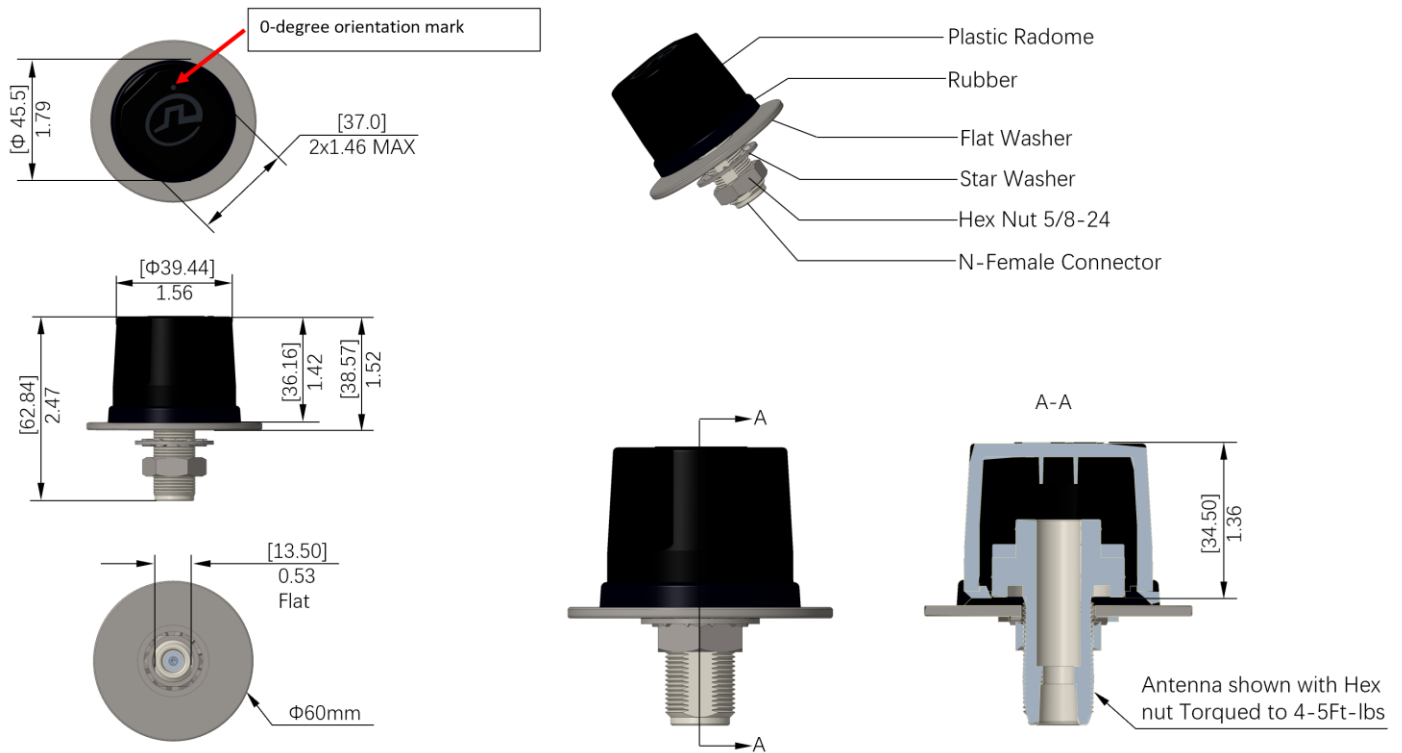


Low Profile WiFi Antenna N-Female Connector

LPTNG2400/71DMN: 2400-2500 and 4900-7125MHz

Testing Setup



LPTNG2400/71DMN

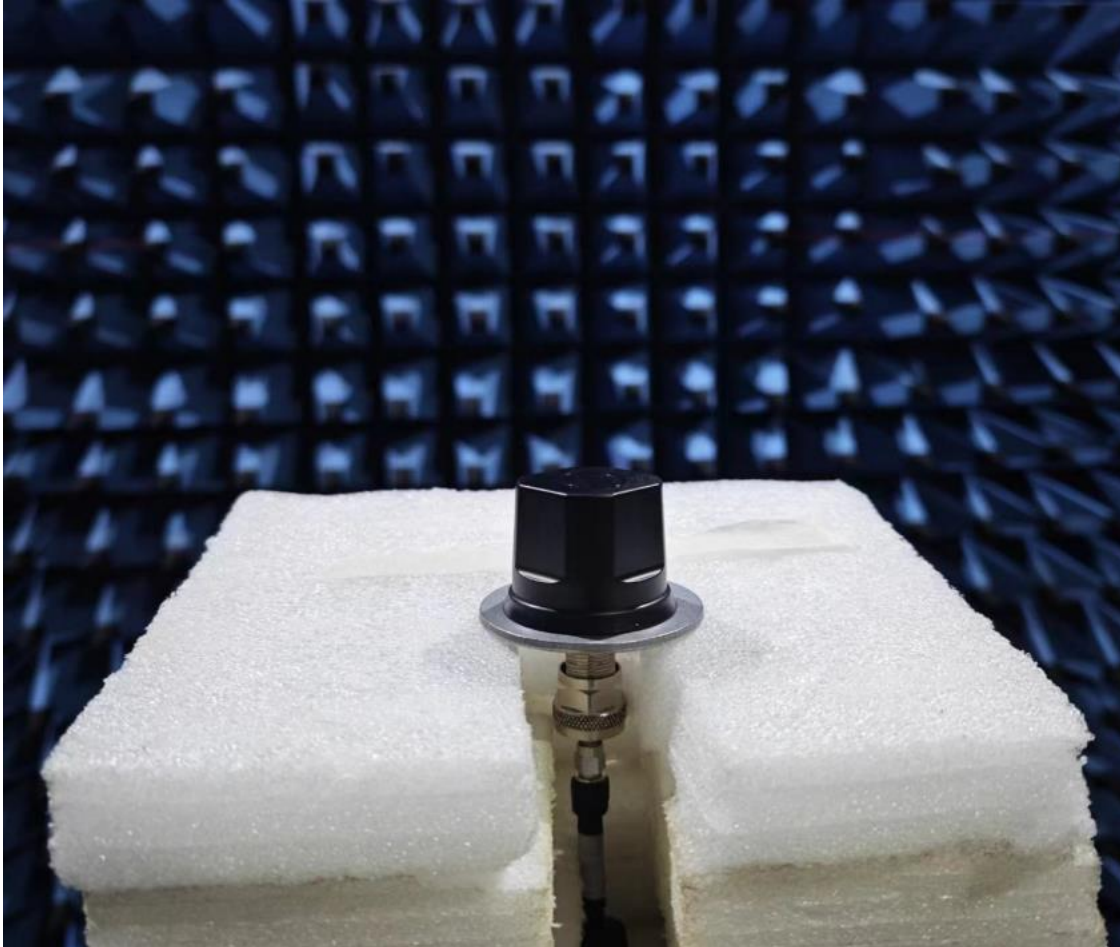

Tested on diameter 60mm Ground plane

Charts- VSWR and Return Loss

LPTNG2400/71DMN

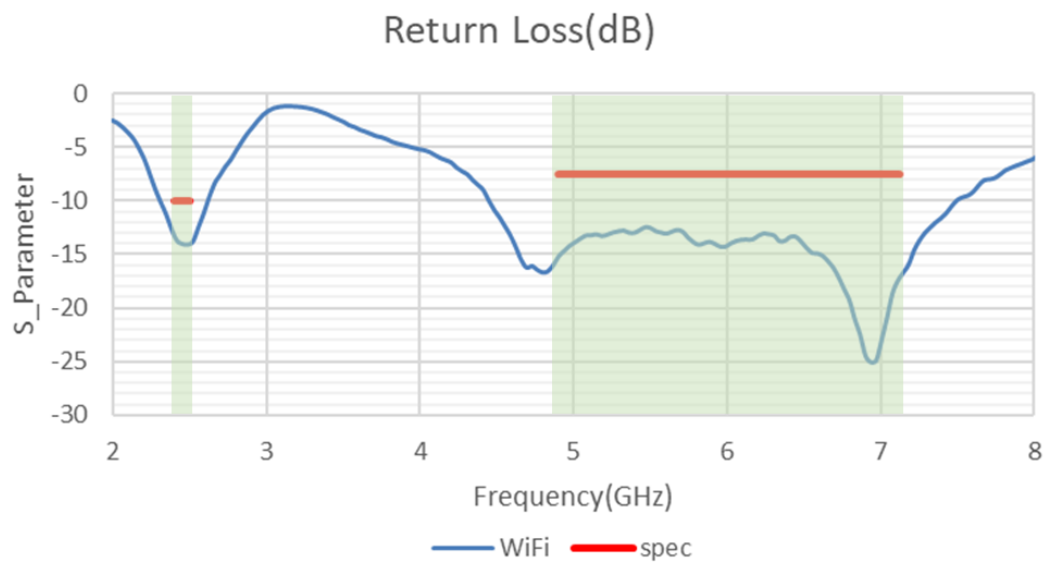
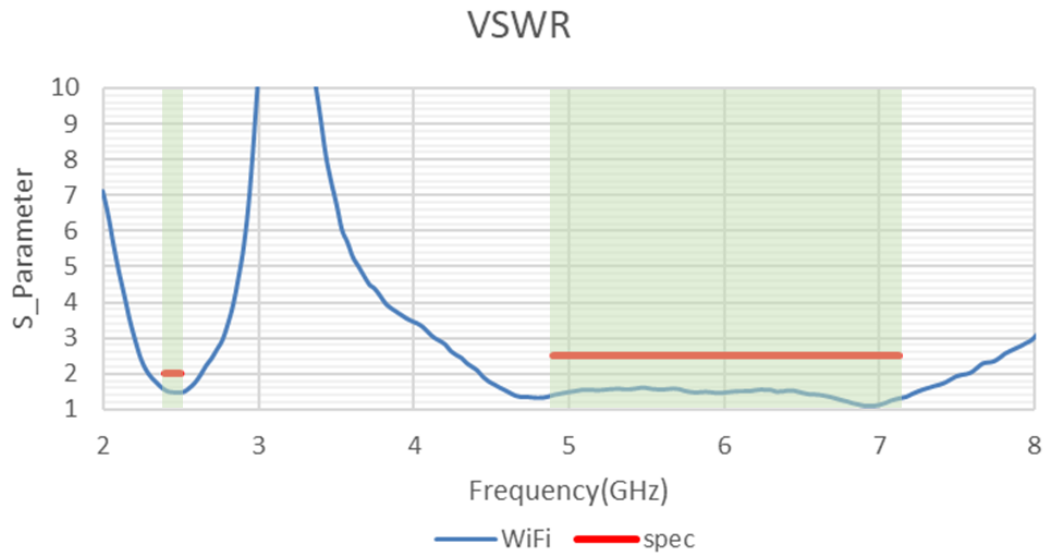


Low Profile WiFi Antenna N-Female Connector

LPTNG2400/71DMN: 2400-2500 and 4900-7125MHz

Charts- Efficiency and Peak Gain

LPTNG2400/71DMN

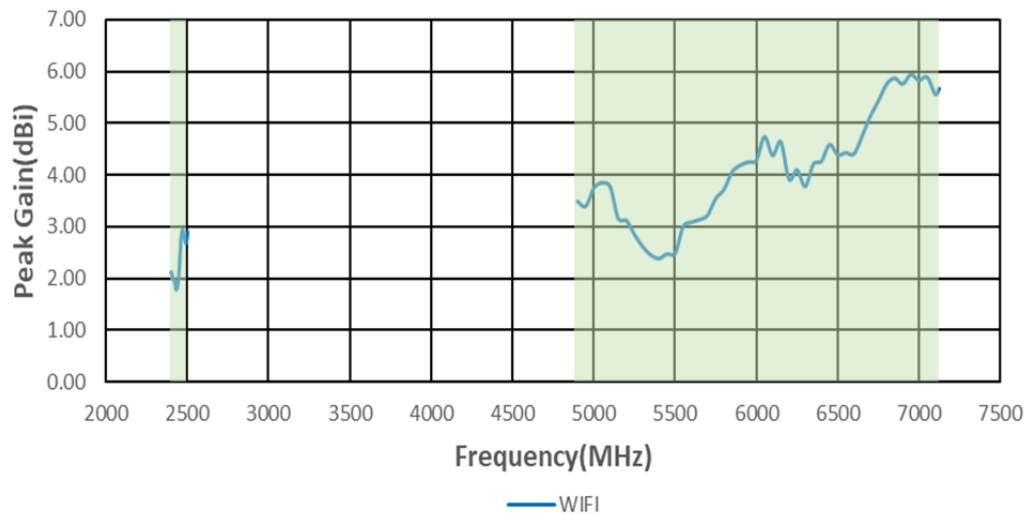
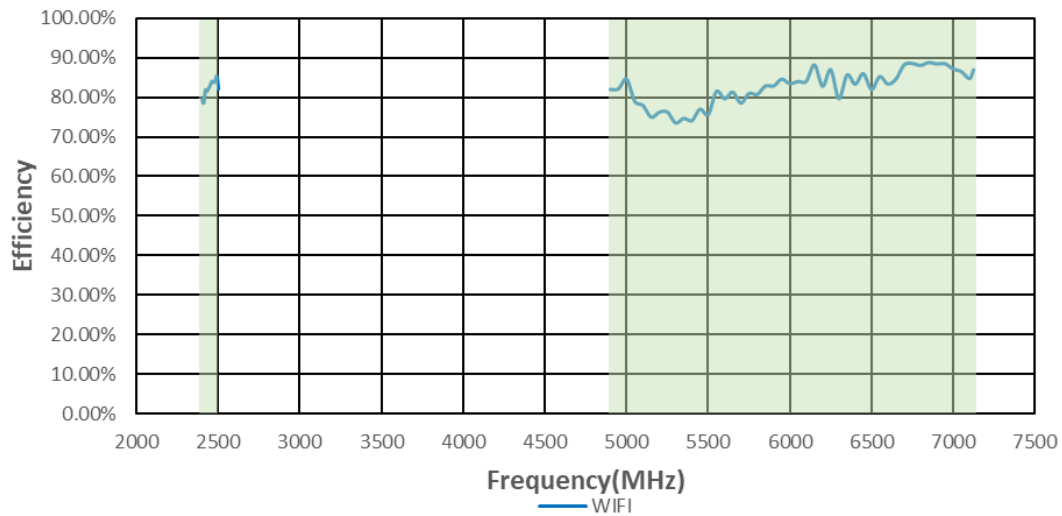


Low Profile WiFi Antenna N-Female Connector

LPTNG2400/71DMN: 2400-2500 and 4900-7125MHz



Charts- XY Gain Plots

LPTNG2400/71DMN

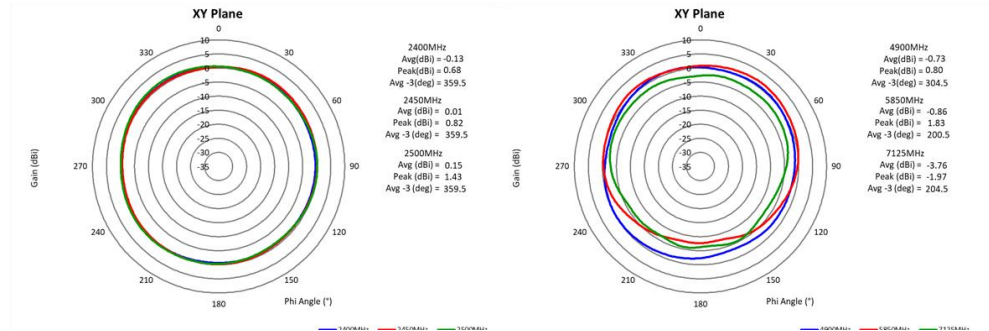



Charts – ZX Gain Plots

LPT2400/71DMN

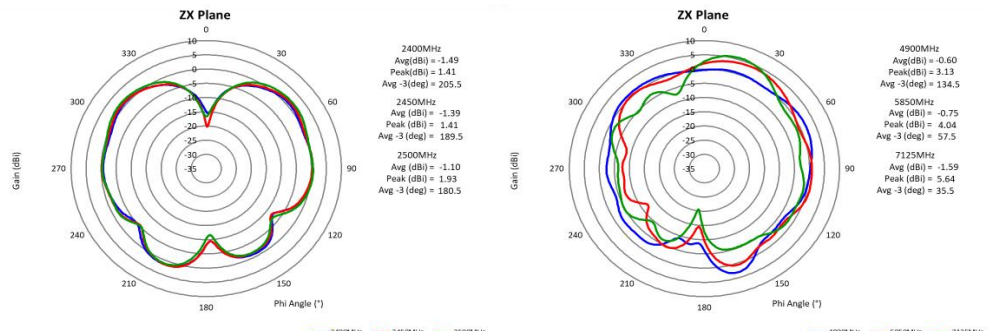

Charts – ZY Gain Plots

LPTNG2400/71DMN

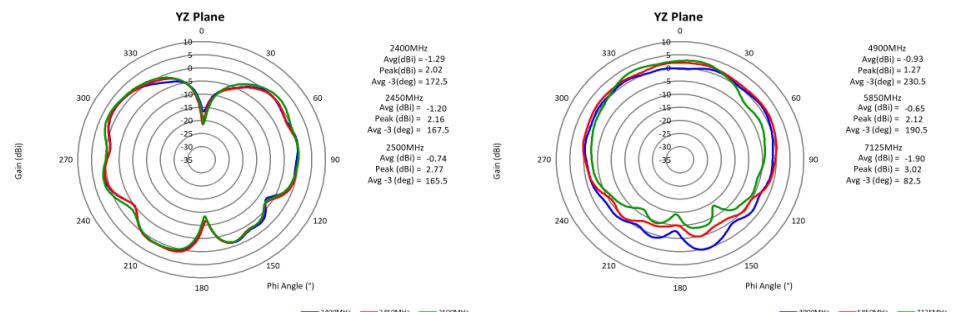

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Pulse](#) manufacturer:

Other Similar products are found below :

[930-033-R](#) [A09-F8NF-M](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [0600-00060](#) [GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [MD10-004](#) [ABFT](#) [LP800NMOW](#) [NMOQ88C](#) [NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [ANT-GPSPUKS](#) [A21H0](#) [29000863](#) [EXD450TN](#) [2.4GHz 2dBi-1.13-L=50mm](#) [3E0702BK-005](#) [22100003](#) [DL-T022-2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [KH-IPEX-1.13](#) [BWGNSCNX16-6B1Y2L120](#) [BWGNSCNX15-15B1Y4L120](#) [DL-T023-4GW](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KHA\(RG1.13\)-TX80B-IPEX](#) [KH-137-TX90B-IPEX4](#) [KH-113-TX100B-IPEX4](#) [KH-113-TX60B-IPEX4](#) [KH-081-TX300-IPEX](#) [3K0001BK00-001](#) [3K0001BK00-002](#) [3N0401LG-038](#) [3N0401BK-049](#) [PRO-OB-440](#) [DL-F8-5G](#)