

SMT Power Inductors

Shielded Drum Core - PA4337.XXXNLT Series



- Height: 4.5mm Max
- Footprint: 6.3mm x 6.3mm Max
- Current Rating: up to 6.5A
- Inductance Range: 0.47uH to 1500uH
- Shielded magnetic circuit reduces leakage flux, Fe base metal core enables high saturation and metallized core termination results in excellent shock resistance.

Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C


Part Number	Inductance 100 KHz, 1V	DC Resistance		Saturation Current ≤30% Drop	Rated Current <40°C Rise
		MAX.	mΩ		
	uH	A	A	A	A
PA4337.471NLT	0.47±30%	8	15.00	15.00	6.50
PA4337.472NLT	4.7±20%	34	4.97	4.97	3.30
PA4337.104NLT	100±20%	563	0.95	0.95	0.80
PA4337.334NLT	330±20%	1651	0.57	0.57	0.57
PA4337.105NLT	1000±20%	4500	0.30	0.30	0.30
PA4337.155NLT	1500±20%	6989	0.28	0.28	0.21

Notes:

- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The Rated Current is the DC current required to raise the component temperature by 40 °C maximum. Take note that the component's performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.

Mechanical

PA4337.XXXNLT

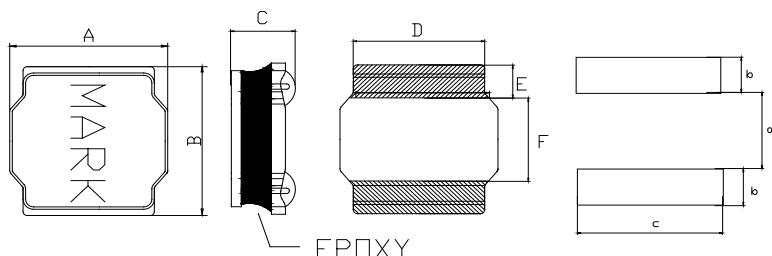

Final Layout

SUGGESTED PAD LAYOUT

SMT Power Inductors


Shielded Drum Core - PA4337.XXXNLT Series



Series	A	B	C	D	E	F	a	b	c
PA4337.XXXNLT	6.0±0.3	6.0±0.3	4.5MAX	4.9±0.3	1.65±0.3	2.7±0.3	2.4 TYP	1.85TYP	5.1 TYP

All Dimensions in mm.


TAPE & REEL INFO

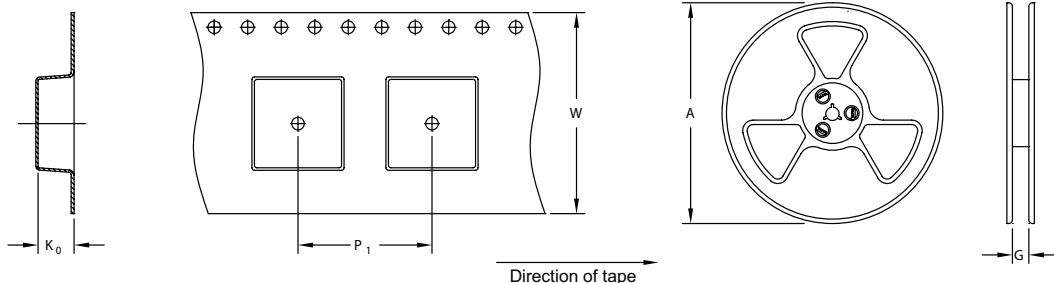


SURFACE MOUNTING TYPE, REEL/TAPE LIST						
TYPE	REEL SIZE (mm)		TAPE SIZE (mm)			QTY
	A	G	P ₁	W	K ₀	
PA4342.XXXANLT	0330	16.5	8	16	4.75	1500

Typical Performance Curves

PA4337.471NLT

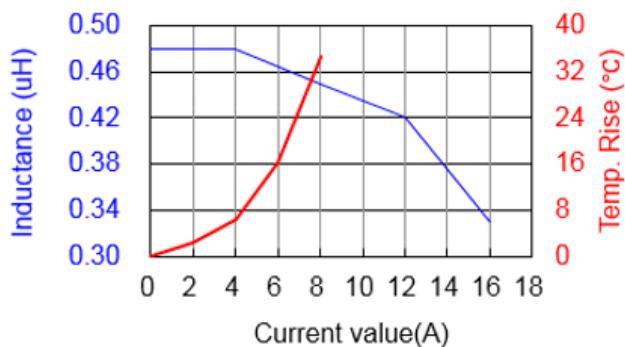

PA4337.472NLT

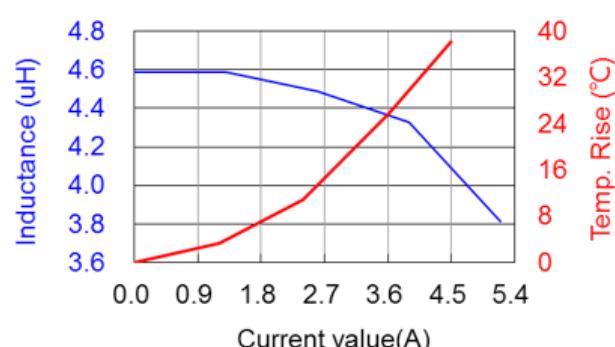


SMT Power Inductor


Shielded Drum Core - PA4337.XXXNLT Series




PA4337.104NLT

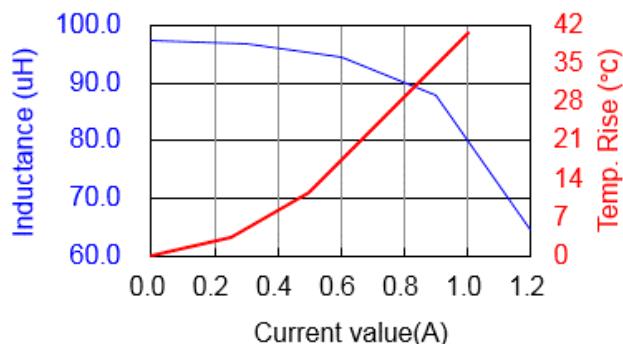


PA4337.334NLT

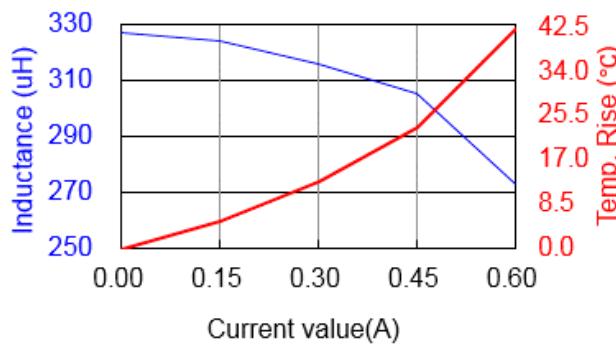

PA4337.105NLT

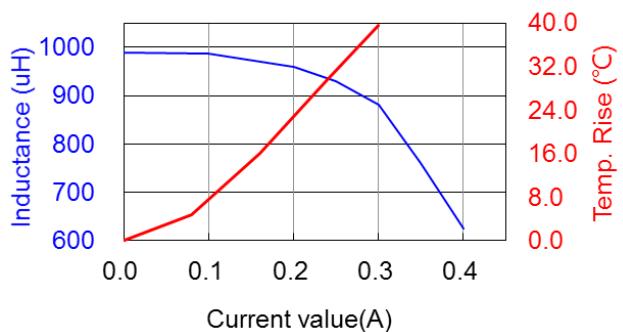

PA4337.155NLT

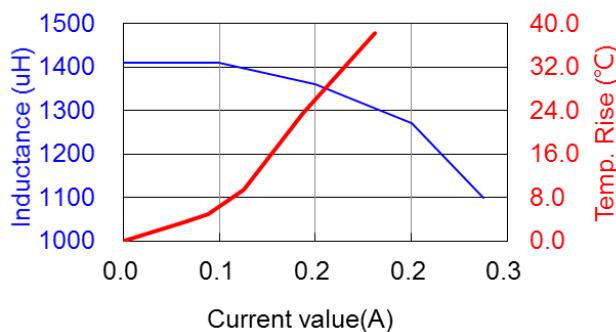

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen, P.R.
China 518057

Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6280 0080

Pulse North Asia

1F, No.111 Xiyuan Rd
Zhongli City
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2017. Pulse Electronics, Inc. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Inductors category:

Click to view products by Pulse manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)
[1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)