

SMD Antenna

2.4GHz LDS Monopole Antenna

SWA434D



Features & Applications:

- Bluetooth devices
- Headsets
- Notebooks and netbooks
- Smart Phones
- Tablet PCs
- 2.4GHz WiFi devices
- Wireless LAN (WLAN)
- IEEE 802.11b/g/n devices
- Tape&Reel packed
- Reflow soldering compatible

ELECTRICAL SPECIFICATIONS @ 25°C

General Specifications 1)

Antenna Type	Nominal Impedance	Polarization	Frequency	Return loss	Efficiency	VSWR	Gain
Monopole	50Ω	Linear	2400~2483.5 MHz	< -5	> 45%	< 3	2.0 to 3.2 dBi

MECHANICAL SPECIFICATIONS

SWA434D

Dimension (Length x Width x Height)	Material	Color	Antenna Type	Mounting Style	MSL	Weight
3mm x 3mm x 4mm	LCP	Black	LDS	SMT	1	0.04g

ENVIRONMENTAL SPECIFICATIONS

SWA434D




Storage Temperature	Operating Temperature	RoHS Compliant
-40/+85° C	-40/+85° C	Yes

Notes:



- 1) Tested on 40x100mm evaluation board, matching circuit 4.3nH shunt inductor

Mechanical Drawing

SWA434D

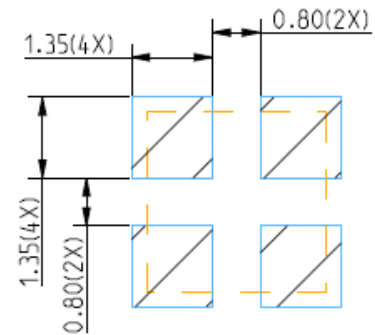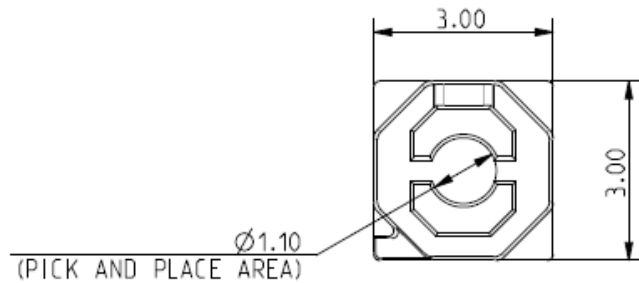

RECOMMENDED PCB LAYOUT

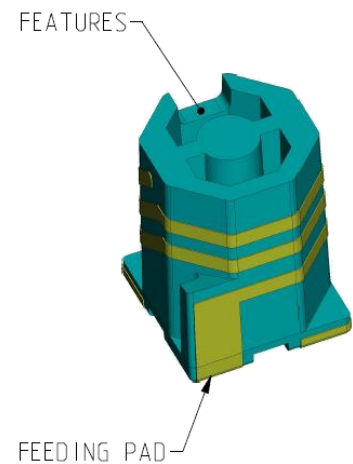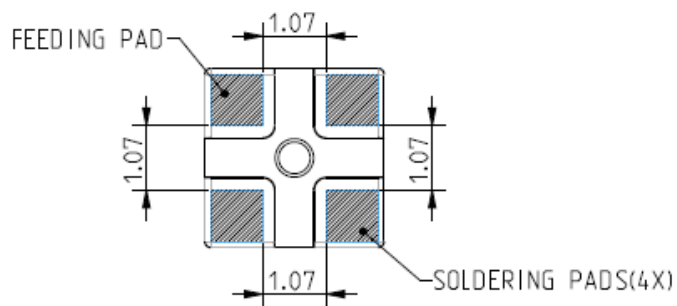

3D VIEW

Dimensions: mm

Recommendation for Reflow Soldering Process

SWA434D

Printing stencil thickness 0.15 to 0.25 mm is recommended for solder paste. The maximum soldering temperature should not exceed 250°C.

The temperature profile recommendations for reflow solder process are presented in Figure 1 and 2. The reflow profile presented in Figure 2 describes maximum reflow temperatures.

Figure 1 - Minimum temperature profile recommendation for reflow soldering process

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5°C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3°C/s
4	Time above 217°C	Max 30 sec
5	Peak temperature in reflow	230°C for 10 seconds
6	Temperature gradient in cooling	Max -5°C/s


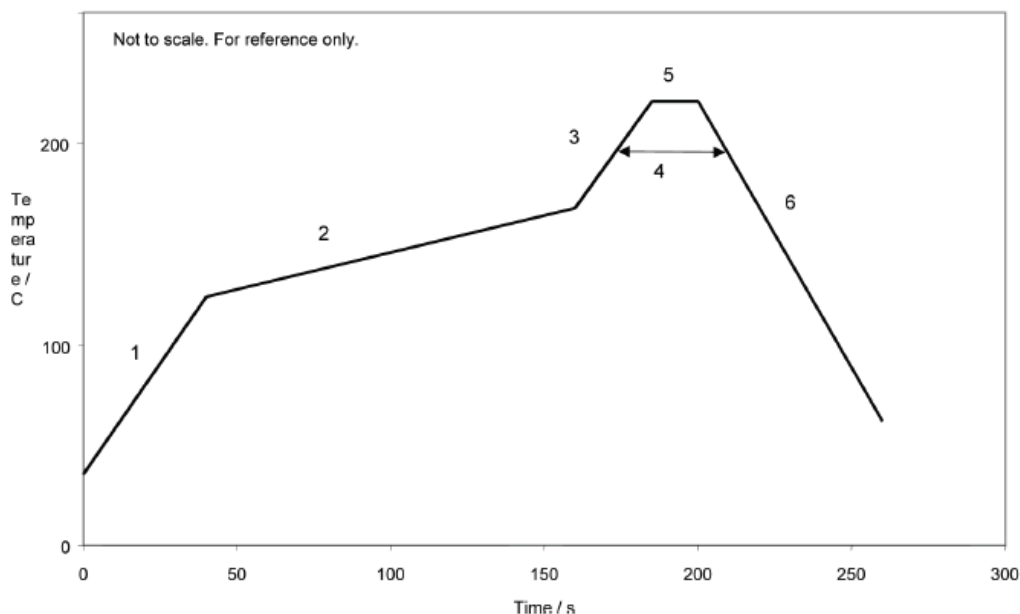


Figure 2 - Maximum temperature profile recommendation for reflow soldering process



	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	$\leq 2^{\circ}\text{C/s}$
2	Soak time	1-2 minutes
3	Max temperature gradient in reflow	3°C/s
4	Time above 217°C	Max 60 sec
5	Time above 230°C	Max 50 sec
7	Peak temperature in reflow	250°C
8	Temperature gradient in cooling	Max -5°C/s

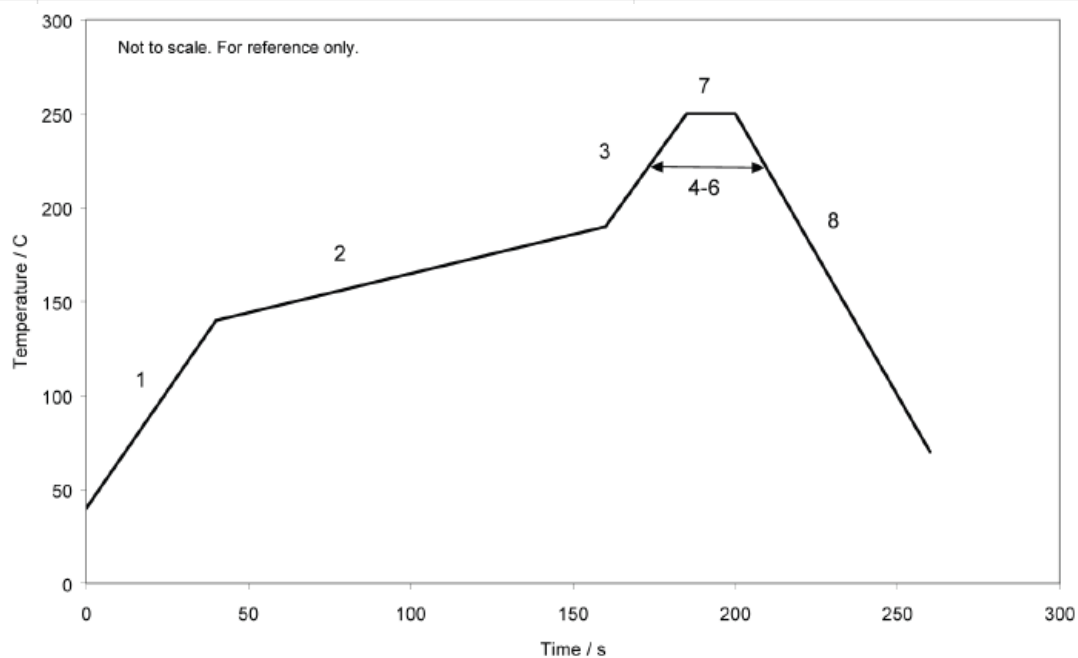

Test Setup

SWA434D



Pulse reference test PCB for SWA434D antenna

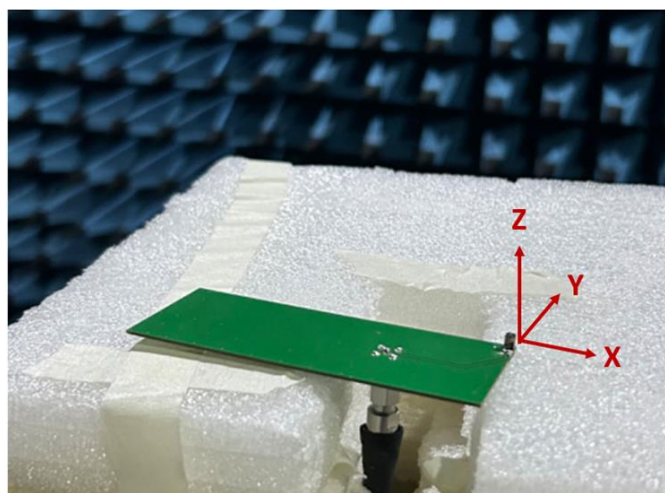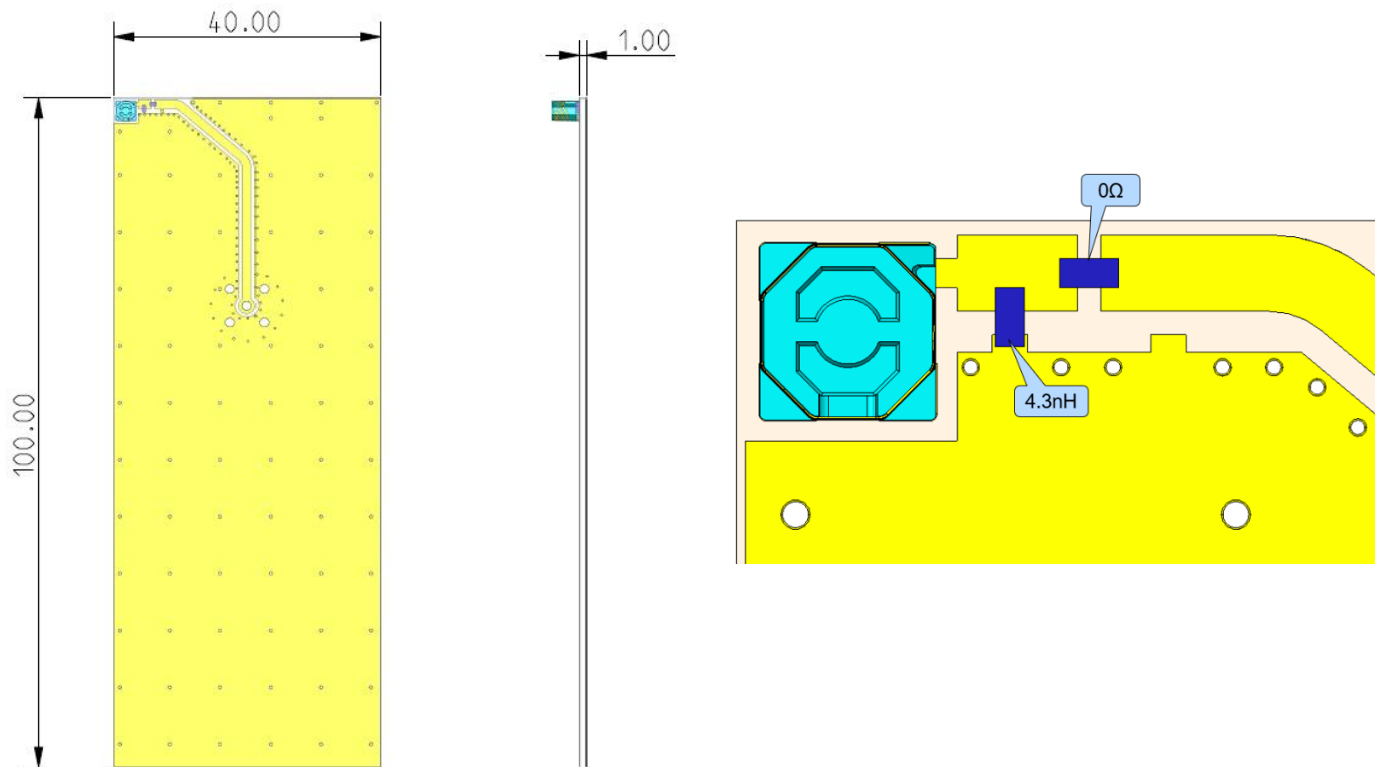

Dimensions: mm



Charts- Antenna Return Loss & VSWR

SWA434D

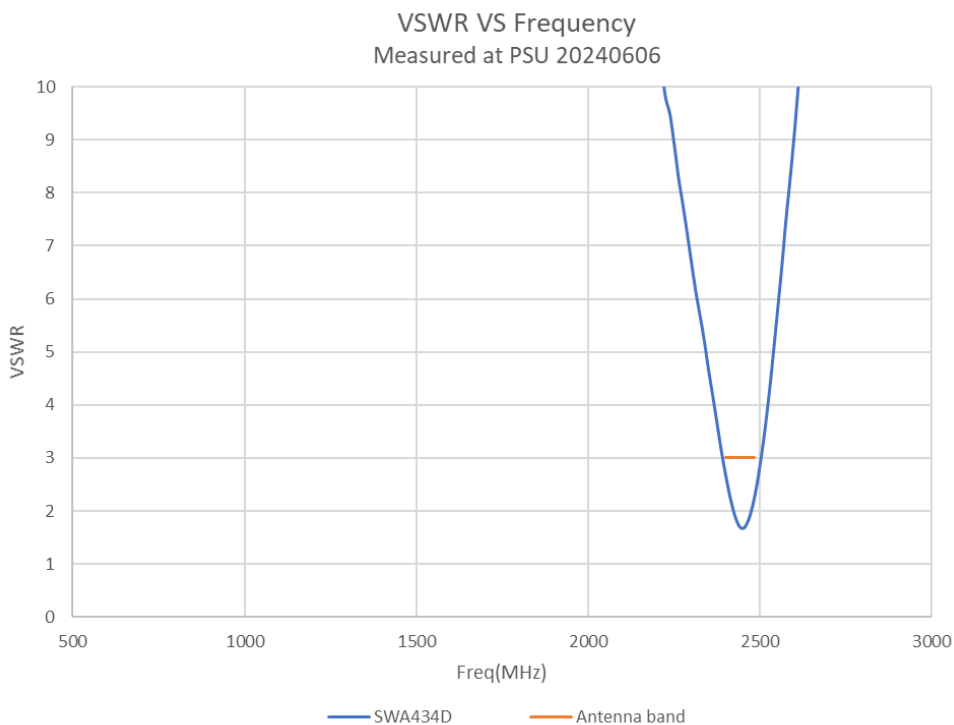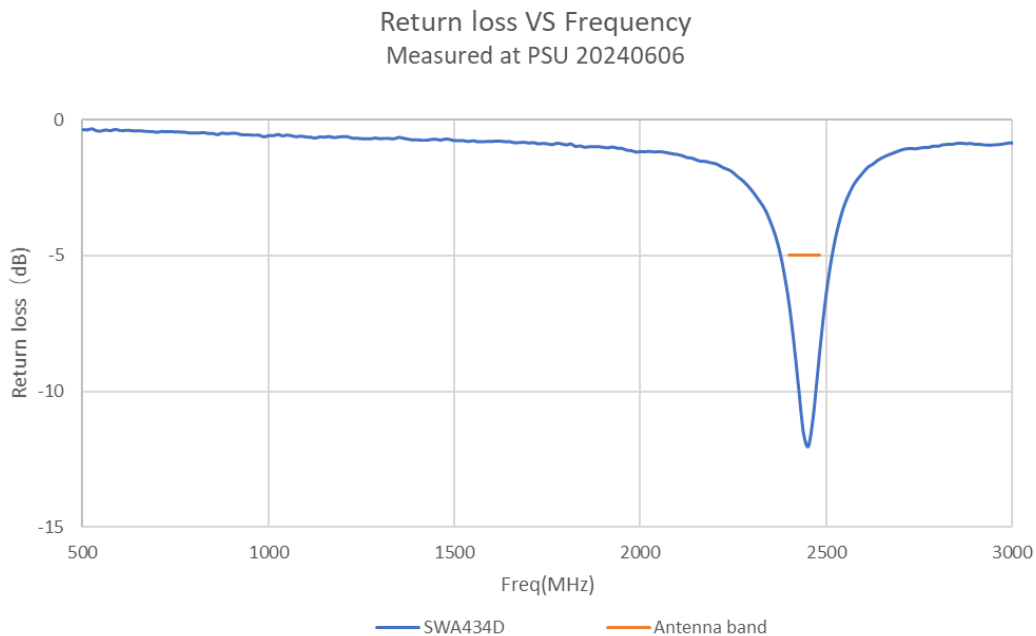





Charts- Efficiency & Peak Gain

SWA434D

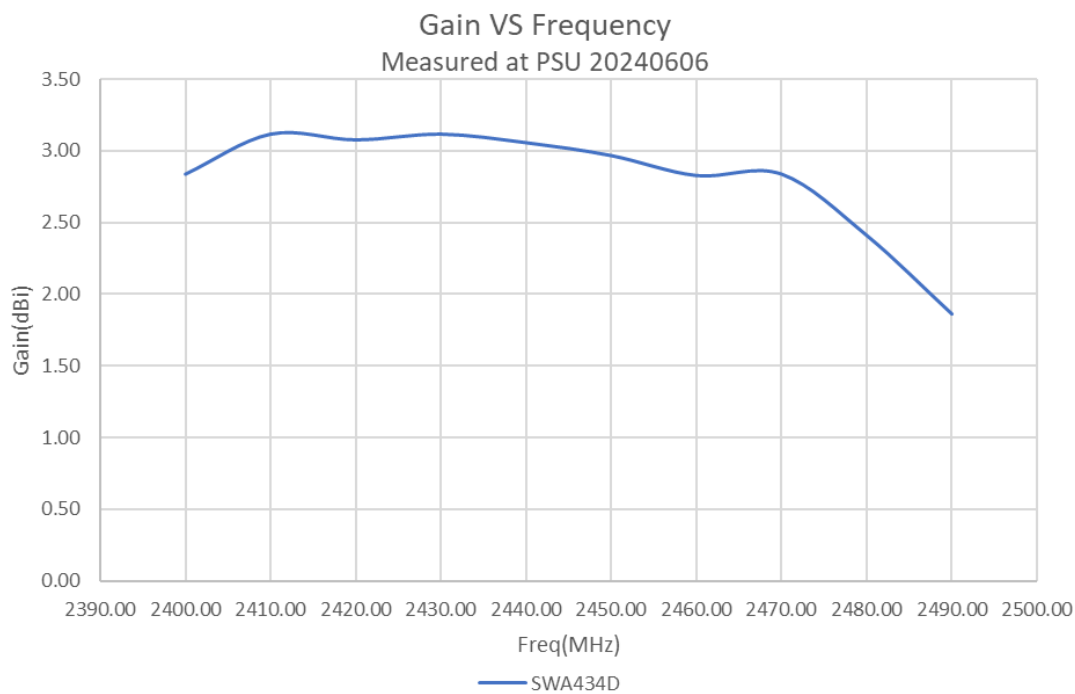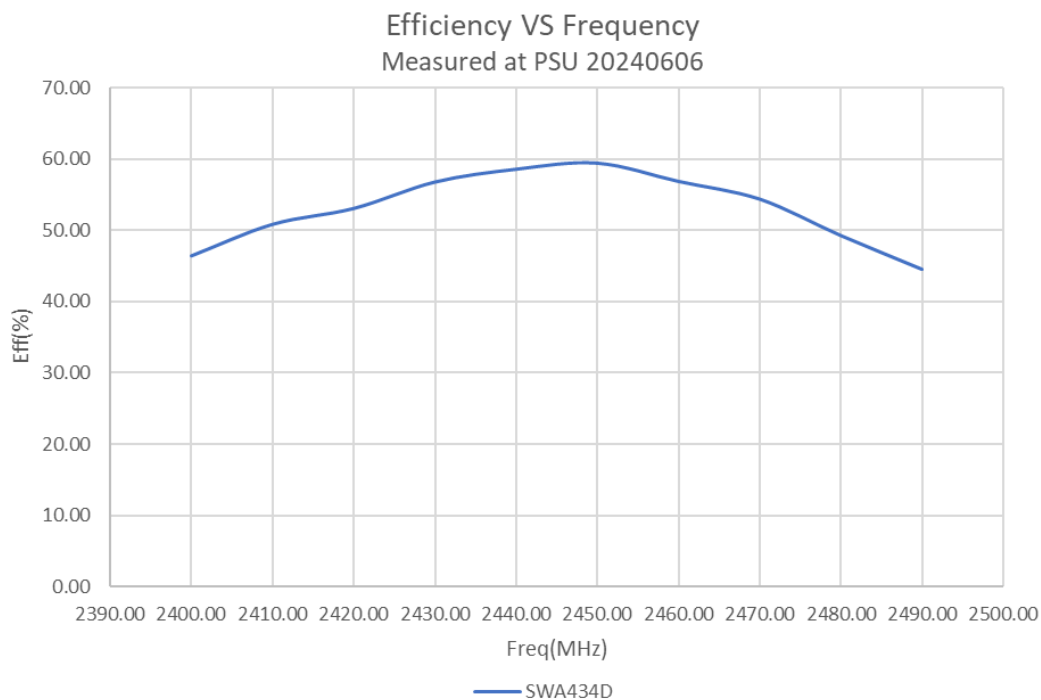





Charts – Antenna Radiation Gain Pattern

SWA434D

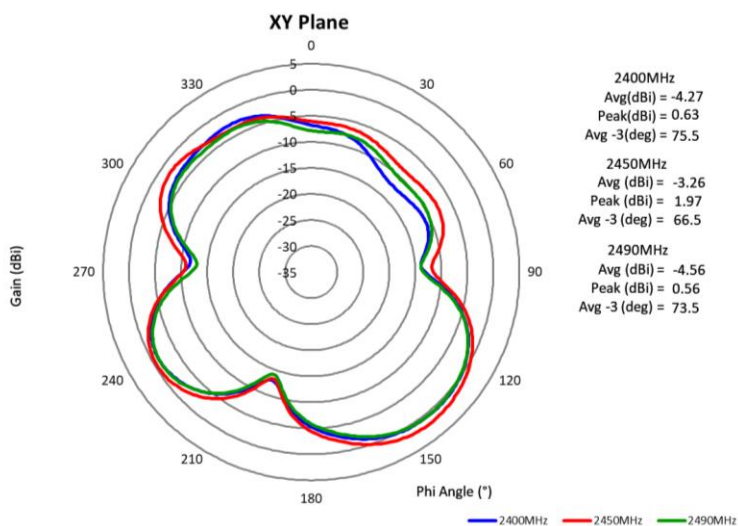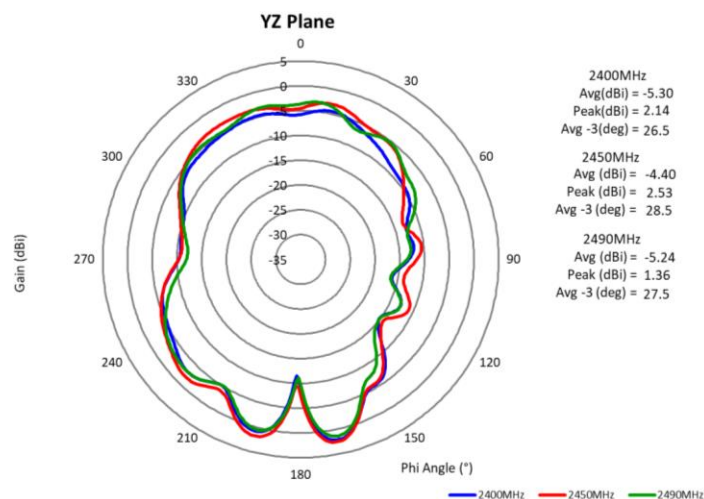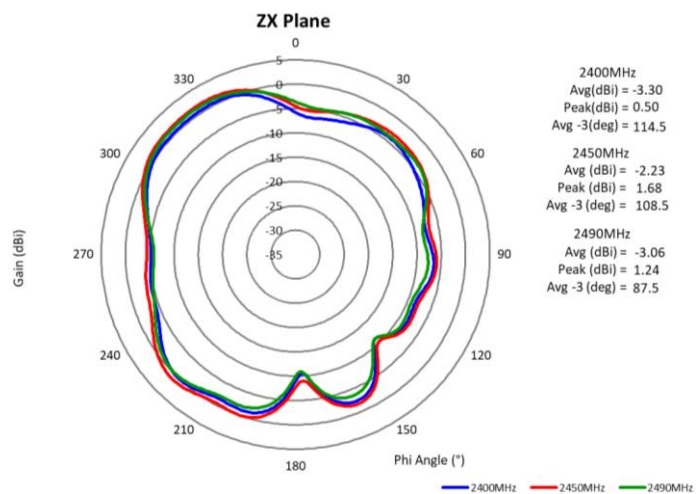

PCB Length Effect

SWA434D

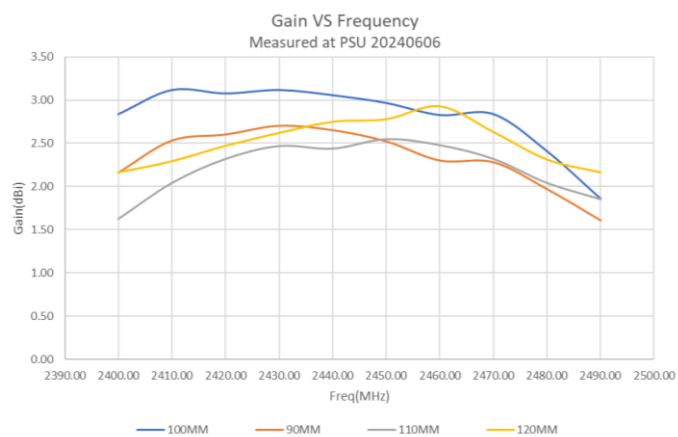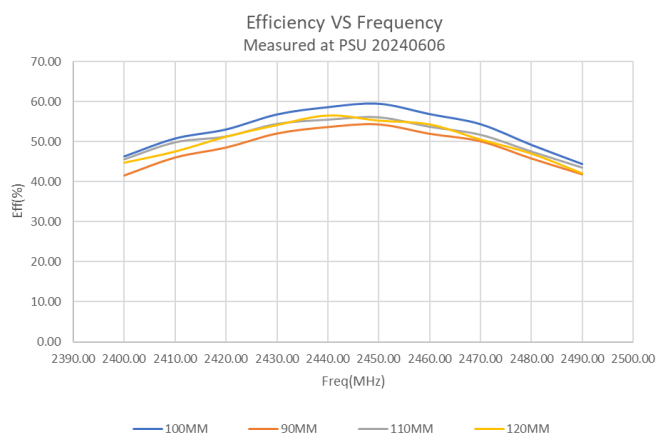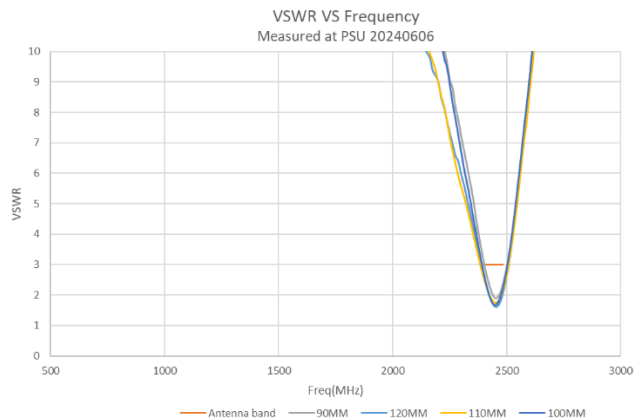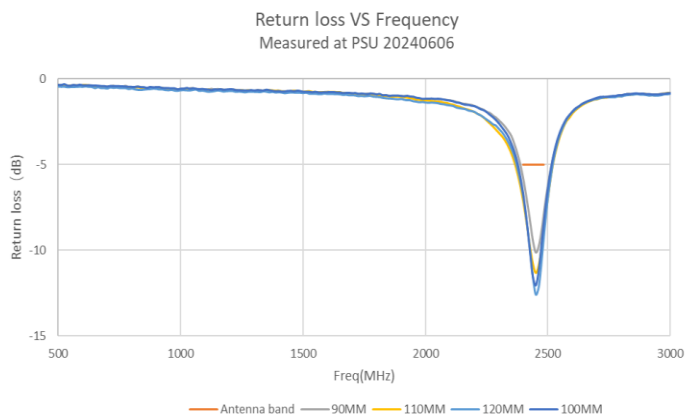

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Pulse](#) manufacturer:

Other Similar products are found below :

[930-033-R](#) [A09-F8NF-M](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [0600-00060](#) [GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [MD10-004](#) [ABFT](#) [LP800NMOW](#) [NMOQ88C](#) [NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [ANT-GPSPUKS](#) [A21H0](#) [29000863](#) [EXD450TN](#) [2.4GHz 2dBi-1.13-L=50mm](#) [3E0702BK-005](#) [22100003](#) [DL-T022-2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [KH-IPEX-1.13](#) [BWGNSCNX16-6B1Y2L120](#) [BWGNSCNX15-15B1Y4L120](#) [DL-T023-4GW](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KHA\(RG1.13\)-TX80B-IPEX](#) [KH-137-TX90B-IPEX4](#) [KH-113-TX100B-IPEX4](#) [KH-113-TX60B-IPEX4](#) [KH-081-TX300-IPEX](#) [3K0001BK00-001](#) [3K0001BK00-002](#) [3N0401LG-038](#) [3N0401BK-049](#) [PRO-OB-440](#) [DL-F8-5G](#)