

Features

- Frequency range : 8MHz to 54MHz
- Glass sealing, ceramic SMD package
- External dimensions (mm)
L : 3.2 x W : 2.5 x H : 0.8
- RoHS compliant
Contains Pb, exempted by RoHS directive

Applications

- PC, TV, Game, Camera
- Notebook, Hard disk
- Computer peripherals
- Home electronics
- Consumer products


Electrical Characteristics

Item		QT325G	Conditions
Frequency Range	F_0	8MHz ~ 54MHz	
Frequency Tolerance	F_{tol}	$\pm 30\text{ppm}$, $\pm 20\text{ppm}$, $\pm 10\text{ppm}$	at 25°C
Frequency Stability over Operating Temperature Range (refer to 25°C)	F_{stab}	$\pm 30\text{ ppm}$	-20°C ~ +70°C
		$\pm 20\text{ ppm}$	
		$\pm 10\text{ ppm}$	
		$\pm 10\text{ ppm}$	-30°C ~ +85°C
		$\pm 50\text{ ppm}$	-40°C ~ +85°C
		$\pm 30\text{ ppm}$	
		$\pm 20\text{ ppm}$	-40°C ~ +125°C
		$\pm 60\text{ ppm}$	
Operating Temperature Range	T_{OTR}	-20°C ~ +70°C	
		-30°C ~ +85°C	
		-40°C ~ +85°C	
		-40°C ~ +125°C	
Shunt Capacitance	C_0	3pF Max.	
Drive Level	D_L	1 ~ 50 μ W (10 μ W Typ.)	
Load Capacitance	C_L	6pF, 7pF, 8pF, 9pF, 10pF 12pF, 16pF, 18pF, 20pF	
Aging	F_{aging}	$\pm 3\text{ ppm Max.}$	at 25°C $\pm$ 3°C, first year
Storage Temperature Range	T_{STR}	-55°C ~ +125°C	

Motional Resistance (ESR)

Fundamental	
8 ~ 9 MHz	350 Ω Max.
9 ~ 10 MHz	200 Ω Max.
10 ~ 12 MHz	150 Ω Max.
12 ~ 16 MHz	100 Ω Max.
16 ~ 54 MHz	60 Ω Max.

Dimensions

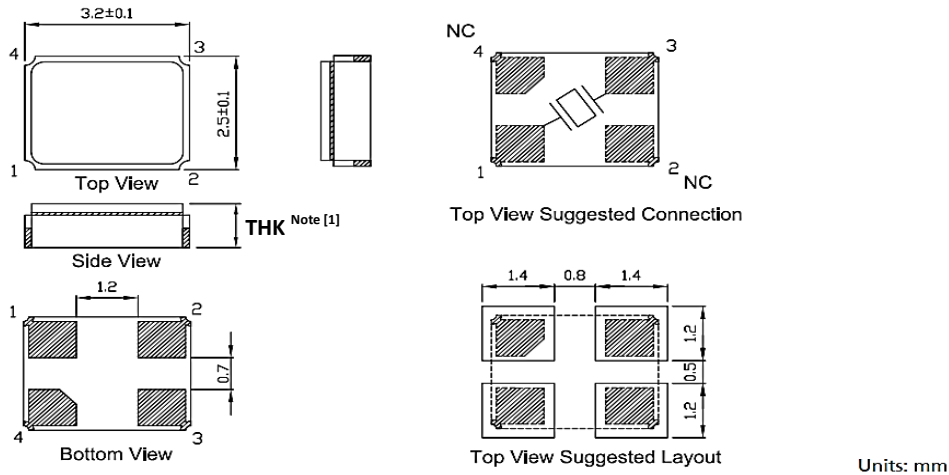


Note:


[1] THK = 0.8 ± 0.1 mm except $F_0 = 8$ MHz.

THK = 0.9 ± 0.1 mm for $F_0 = 8$ MHz.

Ordering Information

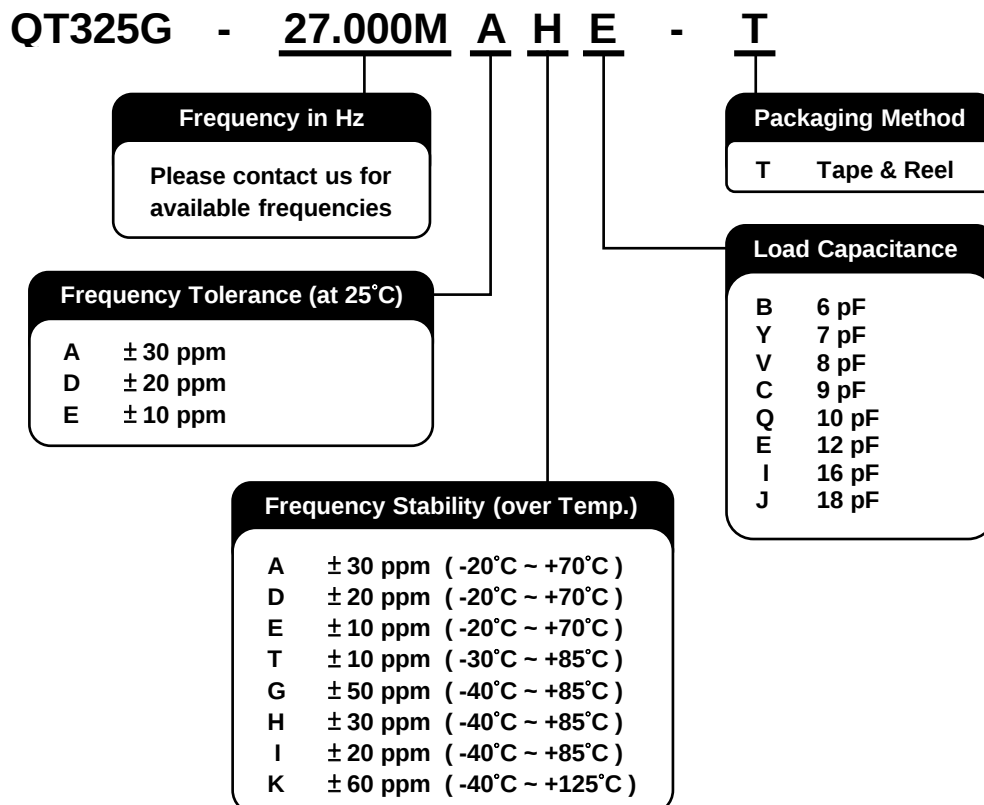


Packing

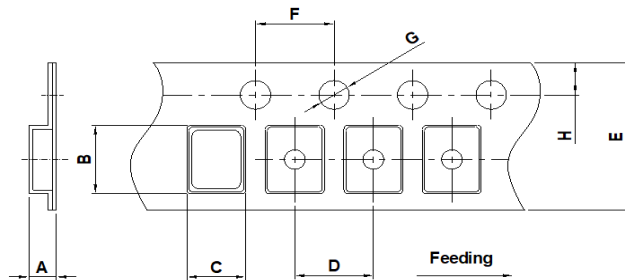

DIMENSIONS	A	B	C	D	E	F	G	H
	1.65±0.10	3.40±0.10	2.70±0.10	4.00±0.10	8.00±0.20	4.00±0.10	1.55±0.10	1.75±0.10

(Unit: mm)

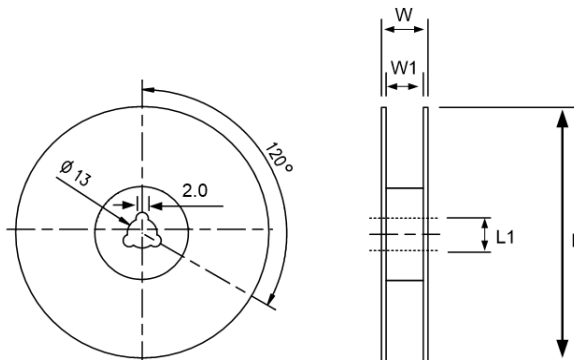


DIMENSIONS	L	L1	W	W1
	178±1.00	13±0.50	11.5±0.20	8±0.10

(Unit: mm)

Reflow Profile

Solder melting point : 220°C ± 10°C, 60 sec. Min.

Peak temperature : 260°C ± 5°C, 10 sec. Min.

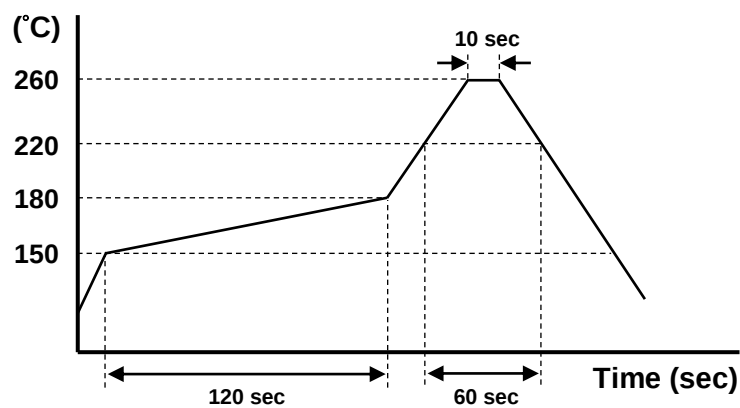

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [QST](#) manufacturer:

Other Similar products are found below :

[AB-11.0592MHZ](#) [RT3215-32.768-12.5-TR](#) [LFXTAL066198Cutt](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#)
[XT9SNLANA16M](#) [049LF-40-3](#) [6504-202-1501](#) [6526-202-1501](#) [ABM3B-24.000MHZ-R60-D1W-](#) [SG636PCE-20.000MC](#) [3404](#)
[CM315D32768EZFT](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [425F35E027M0000](#) [FP0800018](#) [MS3V-T1R-32.768kHz-7pF-](#)
[20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [17000](#) [17301](#) [12.87114](#) [C1E-48.000-10-1530-X-R](#)
[C3E-48.000-10-1530-X-R](#) [FC5BSHFEM25.0-T1](#) [FC5AQCCMF10.0-T1](#) [32.768K7PI/3215E](#) [FC-12M](#) [32.7680KD-A0](#) [HC-49/U-](#)
[S6144000BBKB](#) [FC3BSHHEF32.0-T3](#) [ABM3C-25.000MHZ-E4Y-T](#) [49SMLB12.0000-18HJE-E\(T\)](#) [ABM8G-12.000MHZ-D4Y-T](#) [ABM8G-](#)
[12.000MHZ-18-R80-D2Y-T](#) [FKT26EIHQ0.032768-BAG1K](#) [FC4STCBMF10.0](#) [FO3HSKDM33.333-T1](#) [MS1V-T1K-32.768kHz-9pF-20PPM-](#)
[TA-QC-Au](#) [NX8045GB-8MHZ-STD-CSF-4](#) [NX8045GB-12.000000MHZ-LN-CF-001](#) [CXA-014745-6X7X40](#) [K6A480002020](#)
[SX32Y025000FI1T](#) [SX25Y040000BF1T002](#) [SX32Y048000BA1T001](#) [3607S-32.768DT09LLL](#) [X1A000161000116](#) [049UT2-4.000F07DTJGL](#)