

Features

- Frequency range : 8MHz to 54MHz
- Glass sealing, ceramic SMD package
- External dimensions (mm)
L : 3.2 x W : 2.5 x H : 0.8
- RoHS compliant
Contains Pb, exempted by RoHS directive

Applications

- PC, TV, Game, Camera
- Notebook, Hard disk
- Computer peripherals
- Home electronics
- Consumer products


Electrical Characteristics

Item		QT325G	Conditions
Frequency Range	F_0	8MHz ~ 54MHz	
Frequency Tolerance	F_{tol}	$\pm 30\text{ppm}$, $\pm 20\text{ppm}$, $\pm 10\text{ppm}$	at 25°C
Frequency Stability over Operating Temperature Range (refer to 25°C)	F_{stab}	$\pm 30\text{ ppm}$	-20°C ~ +70°C
		$\pm 20\text{ ppm}$	
		$\pm 10\text{ ppm}$	
		$\pm 10\text{ ppm}$	-30°C ~ +85°C
		$\pm 50\text{ ppm}$	-40°C ~ +85°C
		$\pm 30\text{ ppm}$	
		$\pm 20\text{ ppm}$	-40°C ~ +125°C
		$\pm 60\text{ ppm}$	
Operating Temperature Range	T_{OTR}	-20°C ~ +70°C	
		-30°C ~ +85°C	
		-40°C ~ +85°C	
		-40°C ~ +125°C	
Shunt Capacitance	C_0	3pF Max.	
Drive Level	D_L	1 ~ 50 μ W (10 μ W Typ.)	
Load Capacitance	C_L	6pF, 7pF, 8pF, 9pF, 10pF 12pF, 16pF, 18pF, 20pF	
Aging	F_{aging}	$\pm 3\text{ ppm Max.}$	at 25°C $\pm$ 3°C, first year
Storage Temperature Range	T_{STR}	-55°C ~ +125°C	

Motional Resistance (ESR)

Fundamental	
8 ~ 9 MHz	350 Ω Max.
9 ~ 10 MHz	200 Ω Max.
10 ~ 12 MHz	150 Ω Max.
12 ~ 16 MHz	100 Ω Max.
16 ~ 54 MHz	60 Ω Max.

Dimensions

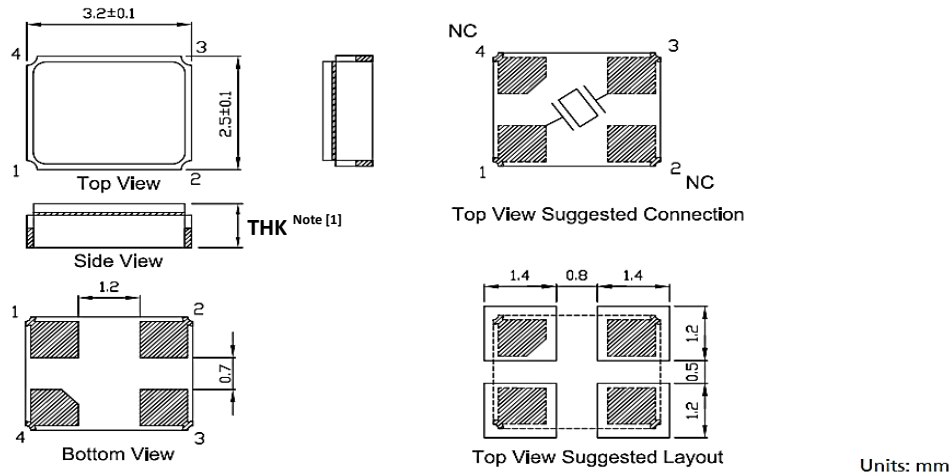


Note:


[1] THK = 0.8 ± 0.1 mm except $F_0 = 8$ MHz.

THK = 0.9 ± 0.1 mm for $F_0 = 8$ MHz.

Ordering Information

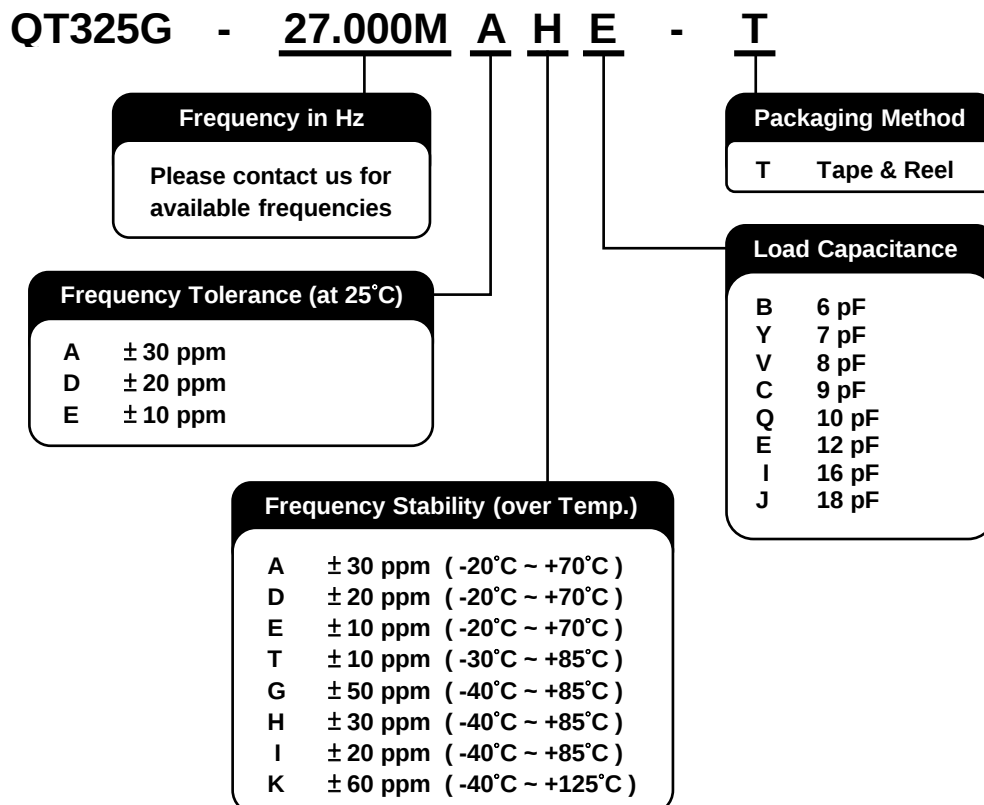


Packing

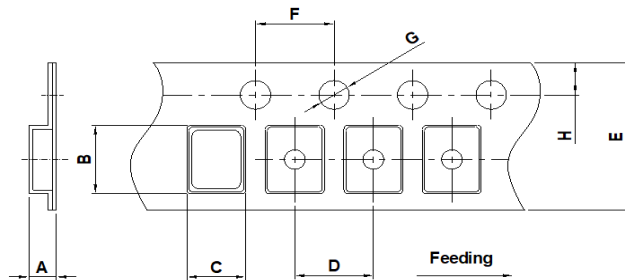

DIMENSIONS	A	B	C	D	E	F	G	H
	1.65±0.10	3.40±0.10	2.70±0.10	4.00±0.10	8.00±0.20	4.00±0.10	1.55±0.10	1.75±0.10

(Unit: mm)

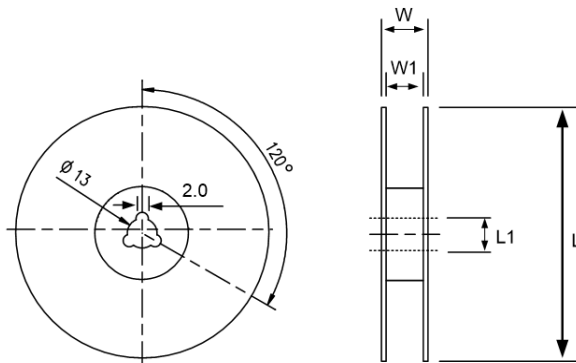


DIMENSIONS	L	L1	W	W1
	178±1.00	13±0.50	11.5±0.20	8±0.10

(Unit: mm)

Reflow Profile

Solder melting point : 220°C ± 10°C, 60 sec. Min.

Peak temperature : 260°C ± 5°C, 10 sec. Min.

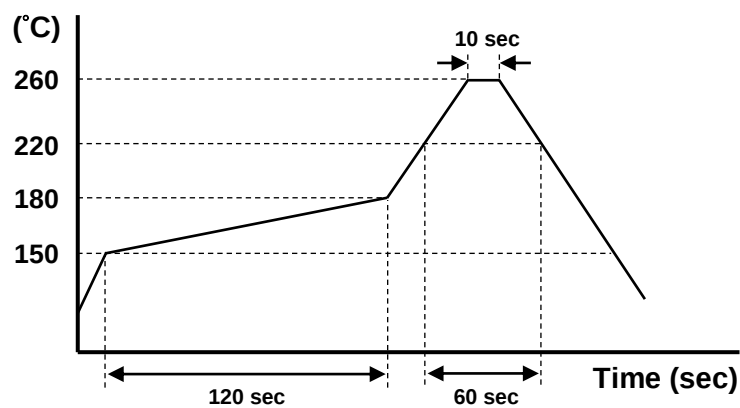

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Other Tools](#) category:

Click to view products by [QST](#) manufacturer:

Other Similar products are found below :

[58061-1](#) [59085](#) [593564100](#) [LUC-024S105DSP](#) [601-SPB](#) [602-JJ-03](#) [603-JJY-04](#) [CRTN1013](#) [CS16](#) [6-1579014-0](#) [M43435 TY 2 SZ 3 FIN C](#)
[BLK](#) [M43435 TY 5 SZ 3 FIN C NAT](#) [660-29ABT1](#) [679793-1](#) [690317-2](#) [691409-4](#) [692006-2](#) [692655-7](#) [699-JJ-2102-09](#) [MA2DPCC](#) [6TBJ05](#)
[7010901002](#) [D-306F](#) [70.353.0635.1](#) [7060](#) [FB20801A](#) [8000-0014](#) [809-207](#) [814615-1](#) [820837-1](#) [820A4276](#) [FL120-1](#) [854503-1](#) [FRD12019](#)
[FW151](#) [PHT-027](#) [91504-3](#) [G-40](#) [9202066](#) [PIMA-L201A](#) [GR80-1](#) [PS-7100](#) [11HPX-75](#) [12006-0](#) [12007-0](#) [A-308X](#) [12002-1](#) [A420-064803-](#)
[00](#) [A420-064867-00](#) [A420-067916-00](#)