

AP3400S

N-Channel Power MOSFET

描述 / Descriptions

SOT23 塑封封装 N 道 MOS 场效应管。N- CHANNEL MOSFET in a SOT23 Plastic Package.

特征 / Features

$V_{DS}(V) = 30V$

$I_D = 5.8 A (V_{GS} = 10V)$

$R_{DS(ON)} < 29m\Omega (V_{GS} = 10V)$

$R_{DS(ON)} < 33m\Omega (V_{GS} = 4.5V)$


$R_{DS(ON)} < 52m\Omega (V_{GS} = 2.5V)$

用途 / Applications


适用于作负载开关或脉宽调制应用。

This device is suitable for use as a load switch or in PWM applications.

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning



PIN1 : S

PIN 2 : G

PIN 3 : D

印章代码 / Marking

Marking	
---------	--

AP3400S

N-Channel Power MOSFET

极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage	V _{DS}	30	V
Drain Current – Continuous	I _D	5.8	A
Drain Current- Continuous	I _D (T _a =70°C)	4.9	A
Pulsed Drain Current	I _{DM}	30	A
Gate-Source Voltage	V _{GS}	±12	V
Total Power Dissipation	P _D	1.4	W
Total Power Dissipation	P _D (T _a =70°C)	1.0	W
Operating and Storage Junction Temperature Range	T _J , T _{STG}	-55 to 150	°C









电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V I _D =250μA	30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =24V V _{GS} =0V			1	μA
		V _{DS} =24V V _{GS} =0V T _J =55°C			5	μA
Gate-Body Leakage	I _{GSS}	V _{GS} =±12V V _{DS} =0V			±0.1	μA
On-State Drain Current	I _{D(on)}	V _{GS} =4.5V V _{DS} =5V	30			A
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} I _D =250μA	0.7	1.1	1.4	V
Static Drain-Source On-Resistance	R _{DS(on)(1)}	V _{GS} =10V I _D =5.8A		29	32	mΩ
	R _{DS(on)(2)}	V _{GS} =10V I _D =5.8A T _J =125°C			39	
	R _{DS(on)(3)}	V _{GS} =4.5V I _D =5A		32	36	
	R _{DS(on)(4)}	V _{GS} =2.5V I _D =4A		40	52	
Forward Transconductance	g _{FS}	V _{DS} =5V I _D =5A	10	15		S
Drain-Source Diode Forward Voltage	V _{SD}	V _{GS} =0V I _S =1A		0.77	1	V
Input Capacitance	C _{iss}	V _{DS} =15V V _{GS} =0V f=1MHz		823	1030	pF
Output Capacitance	C _{oss}			99		
Reverse Transfer Capacitance	C _{rss}			77		
Turn-On Delay Time	t _{d(on)}	V _{GS} =10V R _L =2.7Ω V _{DS} =15V R _{GEN} =3Ω		3.3	5	ns
Turn-On Rise Time	t _r			4.8	7	
Turn-Off Delay Time	t _{d(off)}			26.3	40	
Turn-Off Fall Time	t _f			4.1	6	

AP3400S

N-Channel Power MOSFET

电参数曲线图 / Electrical Characteristic Curve

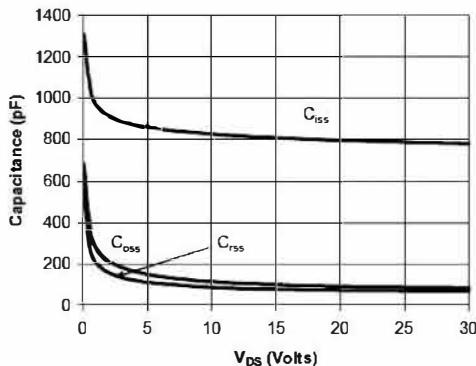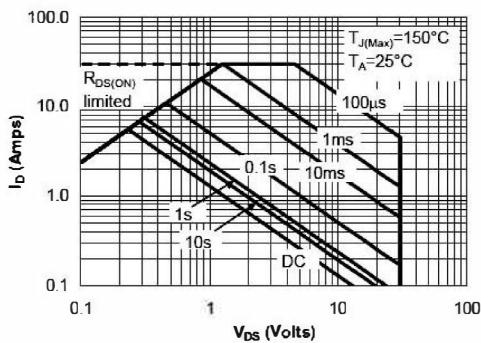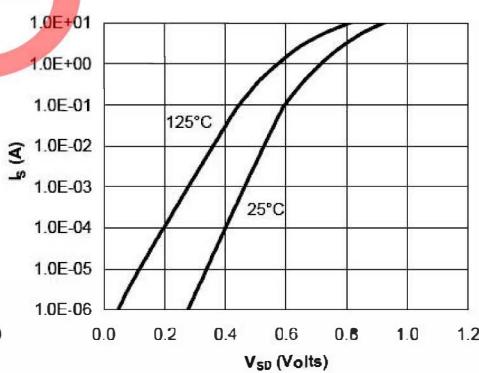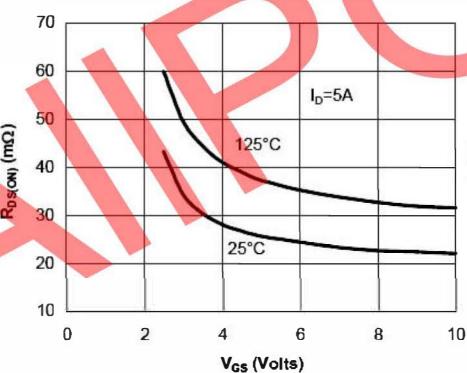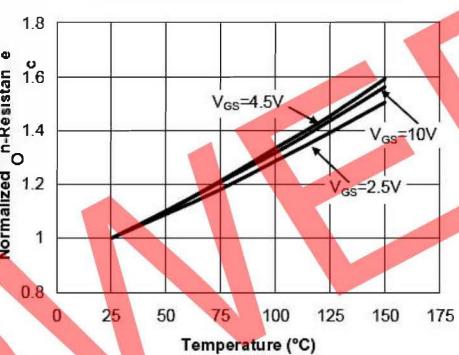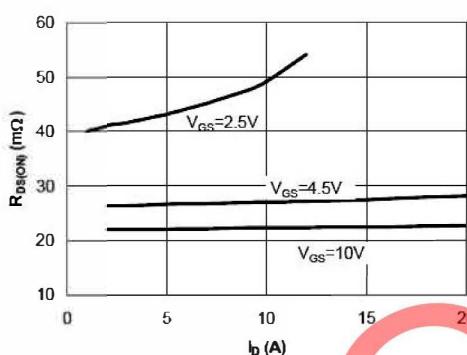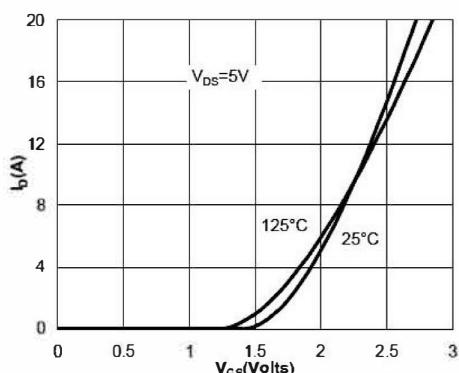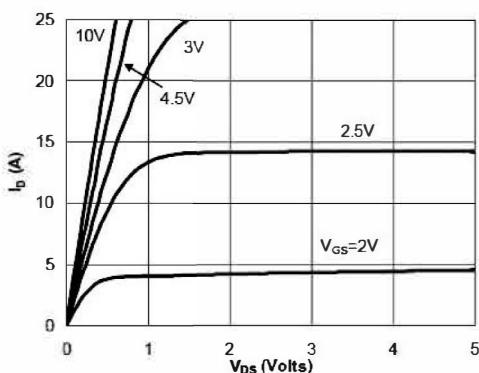


AP3400S

N-Channel Power MOSFET

外形尺寸图 / Package Dimensions

SOT-23


单位: mm

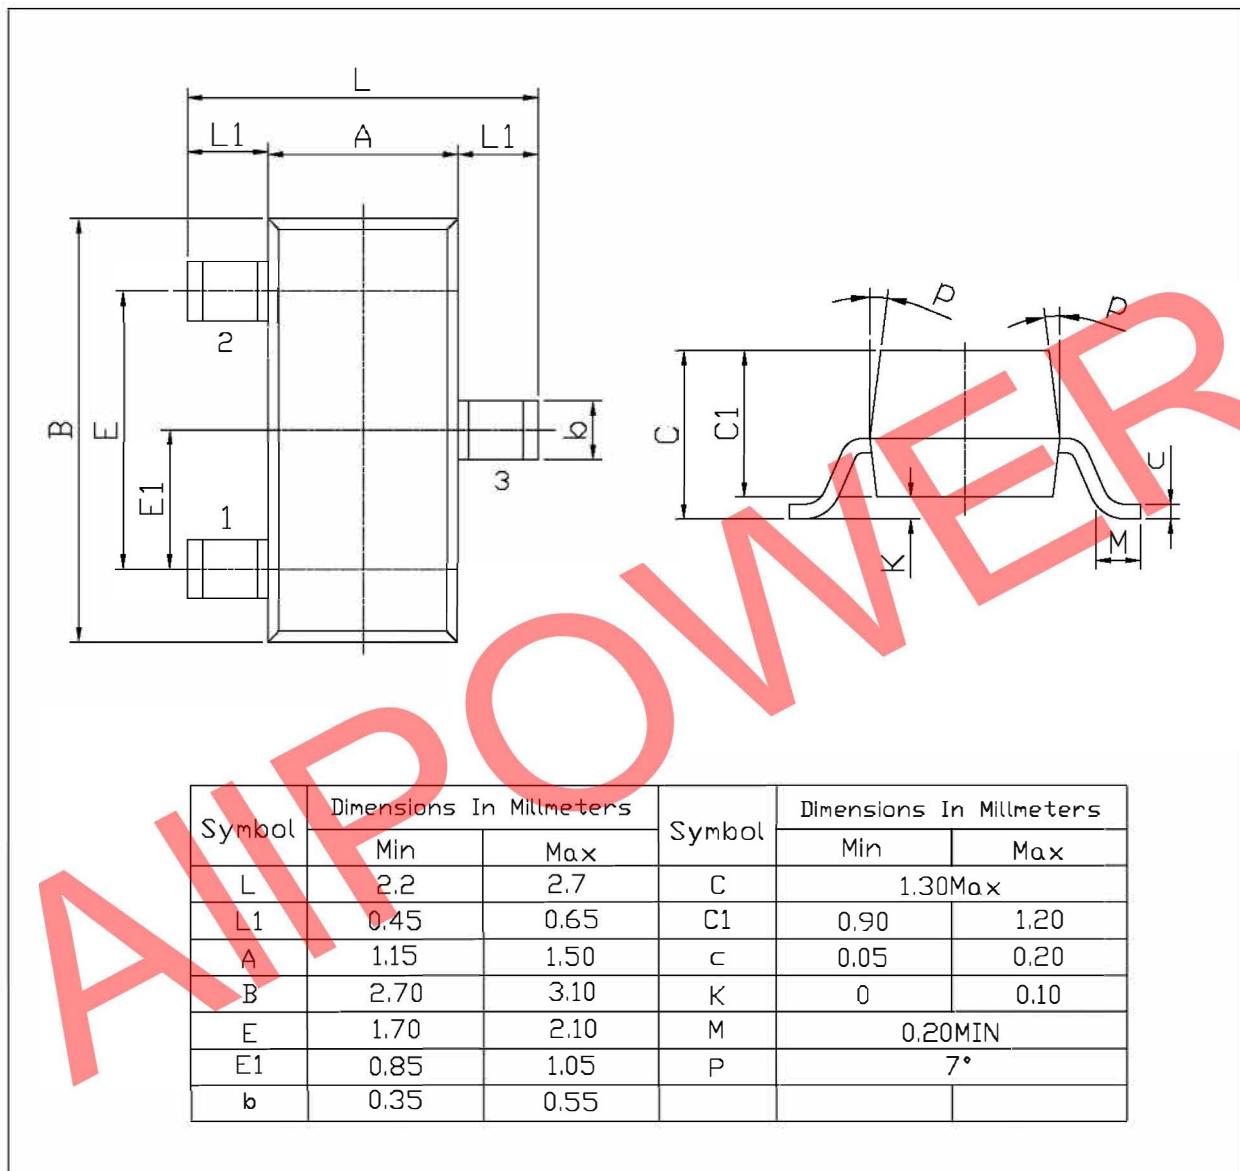

AP3400S

N-Channel Power MOSFET

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

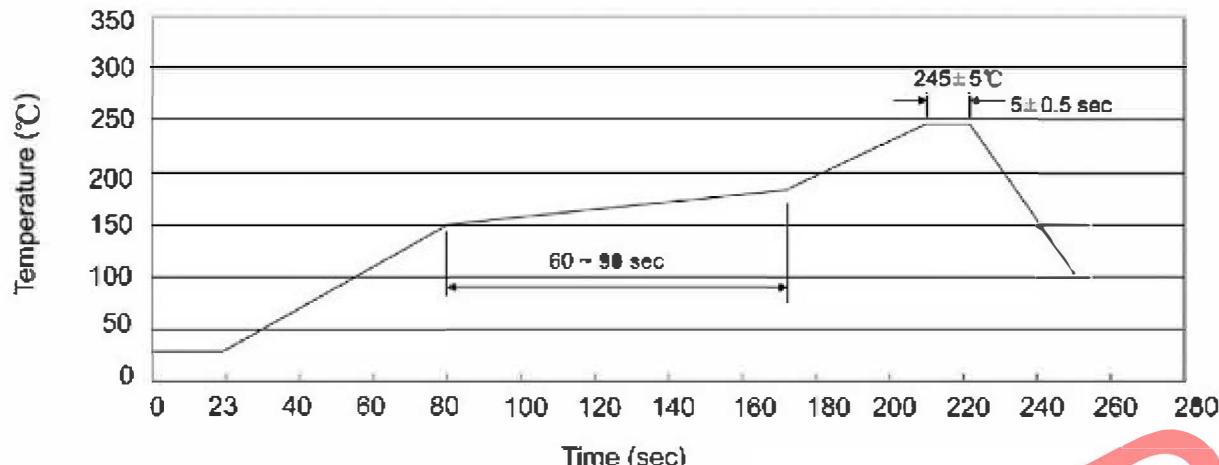

说明：

- 1、预热温度 25 ~ 150°C , 时间 60 ~ 90sec;
- 2、峰值温度 245±5°C , 时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
- 3.Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度 : 260±5°C

时间 : 10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23-3	3,000	10	30,000	4	120,000	7" ×8	210×205×205	445×230×435

使用说明 / Notices

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Quan Li manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#) [IRF100S201](#)
[JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#) [2SK1691-DL-](#)
[E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#) [424134F](#) [026935X](#)
[051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#) [IPS70R2K0CEAKMA1](#)
[RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#) [NTE6400](#) [JANTX2N6796U](#)
[JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#) [2SK2614\(TE16L1,Q\)](#)