

AP3415E**P-Channel Power MOSFET****描述 / Descriptions**

SOT23 塑封封装 P 道 MOS 场效应管。

P- CHANNEL MOSFET in a SOT23 Plastic Package.

特征 / Features

$R_{DS(ON)} < 41 \text{ m}\Omega, V_{GS} = -4.5V$

$R_{DS(ON)} < 53 \text{ m}\Omega, V_{GS} = -2.5V$



无卤产品。HF Product.

ESD

用途 / Applications

负载开关，电池保护。

Load switch , Battery protection.

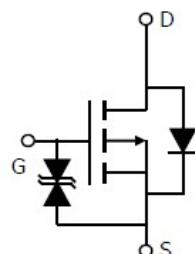内部等效电路 / Equivalent Circuit**引脚排列 / Pinning**

PIN1 : G

PIN 2 : S

PIN 3 : D

印章代码 / Marking

Marking	3415E
---------	-------

AP3415E

P-Channel Power MOSFET

极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage	V _{DS}	-20	V
Gate-Source Voltage	V _{GS}	±10	V
Drain Current-Continuous @ T _C =25°C	I _D	-4	A
Drain Current-Pulsed Note1 @ T _C =25°C	I _{DM}	-24	A
Maximum Power Dissipation	P _D	1.25	W
Storage Temperature Range	T _{STG}	-55 to +150	°C
Operating Junction Temperature Range	T _J	-55 to +150	°C
Thermal Resistance, Junction-to-Ambient Note2	R _{θJA}	100	°C/W

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	B _{VDSS}	V _{GS} =0V I _{DS} =-250μA	-20			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-20V V _{GS} =0V			-1	uA
Gate-Body Leakage	I _{GSS}	V _{GS} =±8V V _{DS} =0V			±10	uA
Gate Threshold Voltage	V _{TH}	V _{DS} =V _{GS} I _{DS} =-250μA	-0.3	-0.8	-1.2	V
Drain-Source On-State Resistance	R _{DS}	V _{GS} =-4.5V I _{DS} =-4A		35	41	mΩ
		V _{GS} =-2.5V I _{DS} =-3A		55	65	
Input Capacitance	C _{iss}	V _{DS} =-10V f=1MHz	V _{GS} =0V	750		pF
Output Capacitance	C _{oss}			110		
Reverse Transfer Capacitance	C _{rss}			80		
Turn-On Delay Time	t _{d(on)}	V _{DS} =-10V V _{GS} =-4.5V R _G =3 R _L =2.5	V _{GS} =0V	15.6		ns
Rise Time	t _r			11.2		
Turn-Off Delay Time	t _{d(off)}			23.1		
Fall Time	t _f			32.7		
Total Gate Charge at 10V	Q _g	V _{DS} =-10V V _{GS} =-4.5V	I _{DS} =-4A	10		nC
Gate to Source Gate Charge	Q _{gs}			1.5		
Gate to Drain "Miller" Charge	Q _{gd}			2.2		
Drain-Source Diode Forward Voltage	V _{SD}	V _{GS} =0V	I _{DS} =-1A		-0.7	

Notes:

1. Pulse Test: Pulse Width 300μs, Duty Cycle 2%.
2. R_{θJA} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. R_{θJC} is guaranteed by design while R_{θCA} is determined by the user's board design. R_{θJA} shown below for single device operation on FR-4 in still air.

AP3415E

P-Channel Power MOSFET

电参数曲线图 / Electrical Characteristic Curve

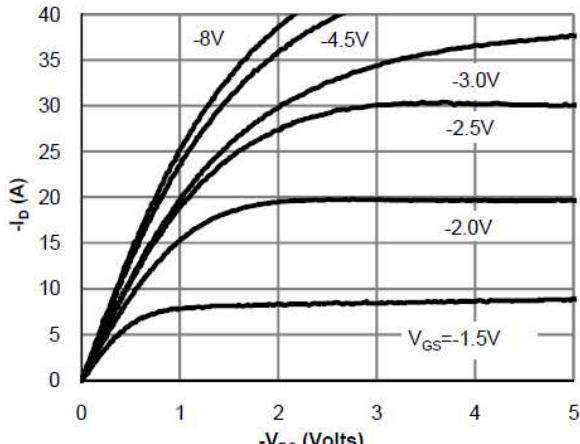


Fig 1: On-Region Characteristics (Note E)

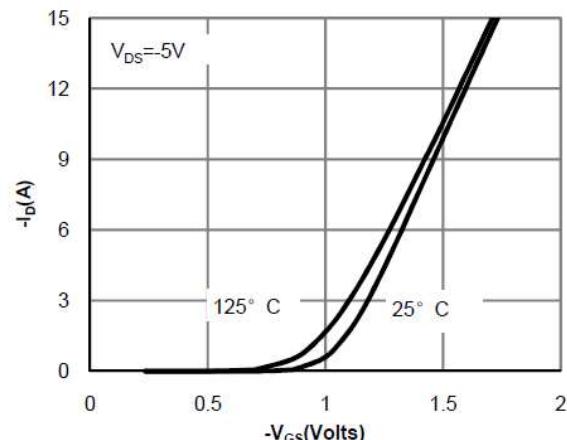


Figure 2: Transfer Characteristics (Note E)

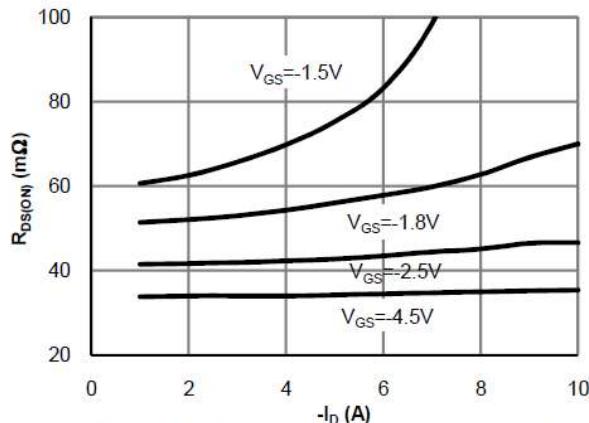


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

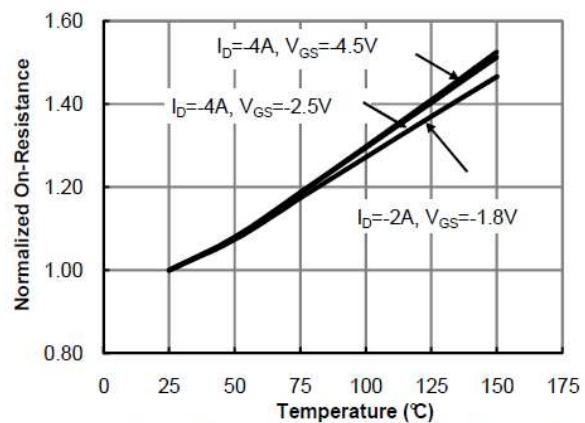


Figure 4: On-Resistance vs. Junction Temperature (Note E)

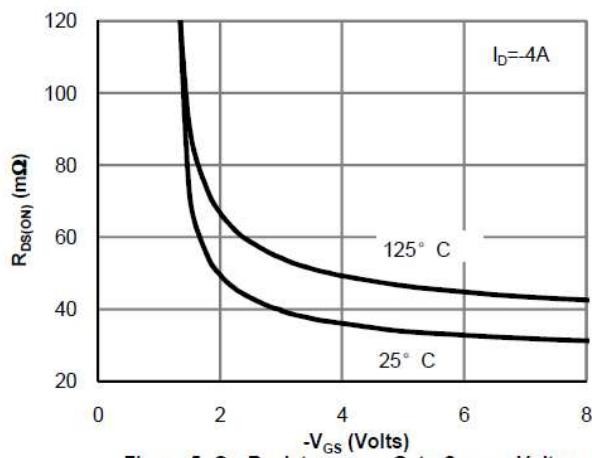


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

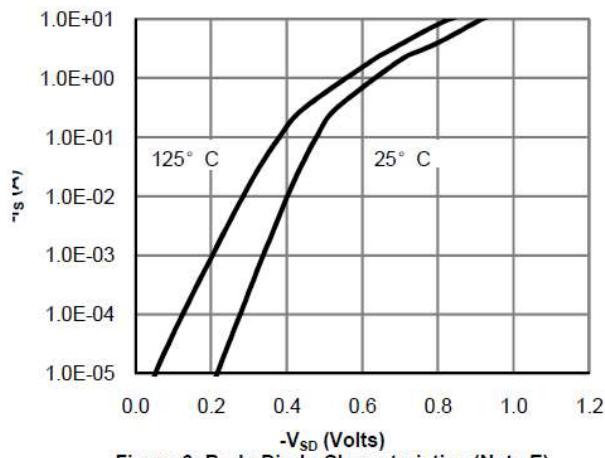


Figure 6: Body-Diode Characteristics (Note E)


AP3415E

P-Channel Power MOSFET

外形尺寸图 / Package Dimensions

SOT-23

单位: mm

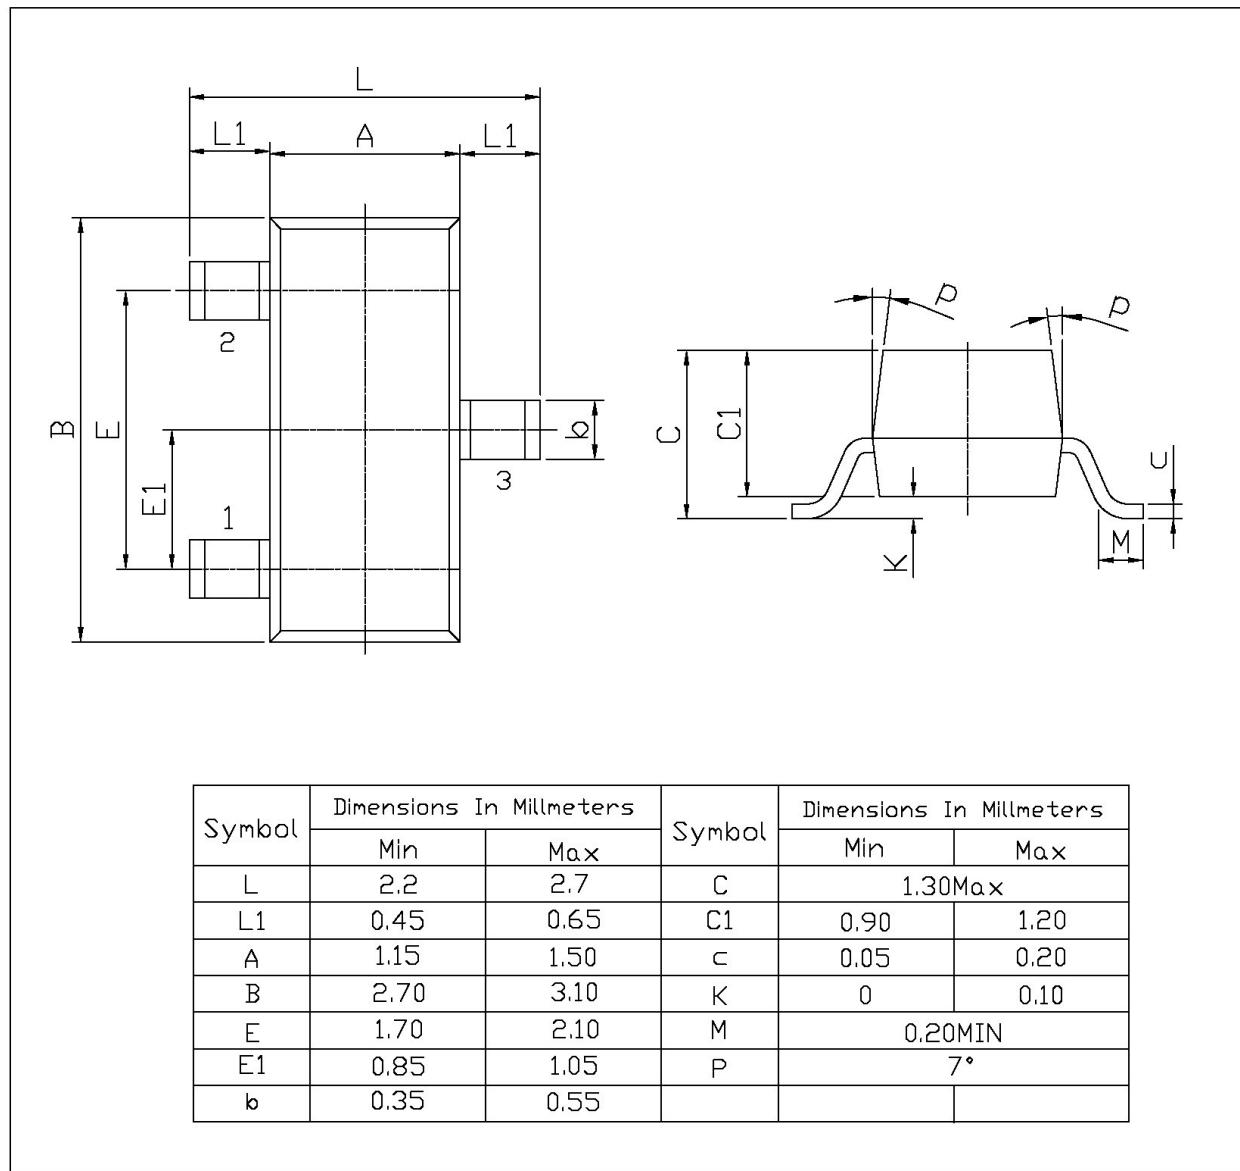

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Quan Li manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [NTNS3A92PZT5G](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#)
[AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#)
[IPS70R2K0CEAKMA1](#) [BSF024N03LT3 G](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#)
[EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#)
[DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [IPSA70R950CEAKMA1](#) [IPSA70R2K0CEAKMA1](#) [STU5N65M6](#)
[C3M0021120D](#)