

RAA2P4200 Evaluation Kit (RTKA2P4200S00000BE)

This guide provides step-by-step instructions for setting up the hardware of the RAA2P4200 evaluation kit.

Contents

1. Evaluation Kit Hardware..... 2

1.1 Hardware Kit Content 2

2. Hardware Setup 2

2.1 RAA2P4200R0100 Module..... 2

2.2 RAA2P4200L100 Module 3

2.3 RAA2P-COMBOARD Connections..... 4

3. Software Setup..... 5

4. Revision History 5

Figures

Figure 1. RAA2P4200 Standard Kit Content 2

Figure 2. RAA2P4200R0100 Module 2

Figure 3. RAA2P4200R0100 Module Settings and Connections..... 3

Figure 4. RAA2P4200L100 Module Settings and Connections 4

Figure 5. Evaluation Kit Connection Setup 4

Tables

Table 1. Evaluation Kit Contents 2

1. Evaluation Kit Hardware

The RAA2P4200 hardware and software ecosystem is designed to provide quick setup and easy evaluation of the device's capabilities. Contact the local Renesas representative to obtain the required components and development boards.

1.1 Hardware Kit Content

Table 1 lists components that are included in the kit.

Table 1. Evaluation Kit Contents

Name	Ordering Number	Information	Quantity
RAA2P-COMBOARD	RAA2P-COMBOARD	Programming board	1
10-wire sensor cable	N/A		2
USB-B cable	N/A		1
RAA2P4200R0100	N/A	360° Rotary OD=32mm Sensor Module	1
RAA2P4200L100	N/A	Linear 100 mm Linear Sensor Module	1



Figure 1. RAA2P4200 Standard Kit Content

2. Hardware Setup

The kit includes two sensor modules, one for rotary sensing and one for rotary sensing that could be interfaced with the RAA2PCOMBARD to communicate, configure and perform position sensing.

2.1 RAA2P4200R0100 Module

The RAA2P4200R0100 module is a rotary sensor with the following characteristics:

- Absolute 360° Rotary Sensing in just 32mm Outer diameter
- 14-bit Resolution
- $\pm 0.11^\circ$ Accuracy
- I2C, Analog and PWM interfaces are available



Figure 2. RAA2P4200R0100 Module

Modify the connection of the P2 header on the sensor module depending on the needed interface and functionality as the following:

- Connect Pin1 with Pin2 for I2C use
- Connect Pin2 with Pin3 for Analog In usage with an external sensor

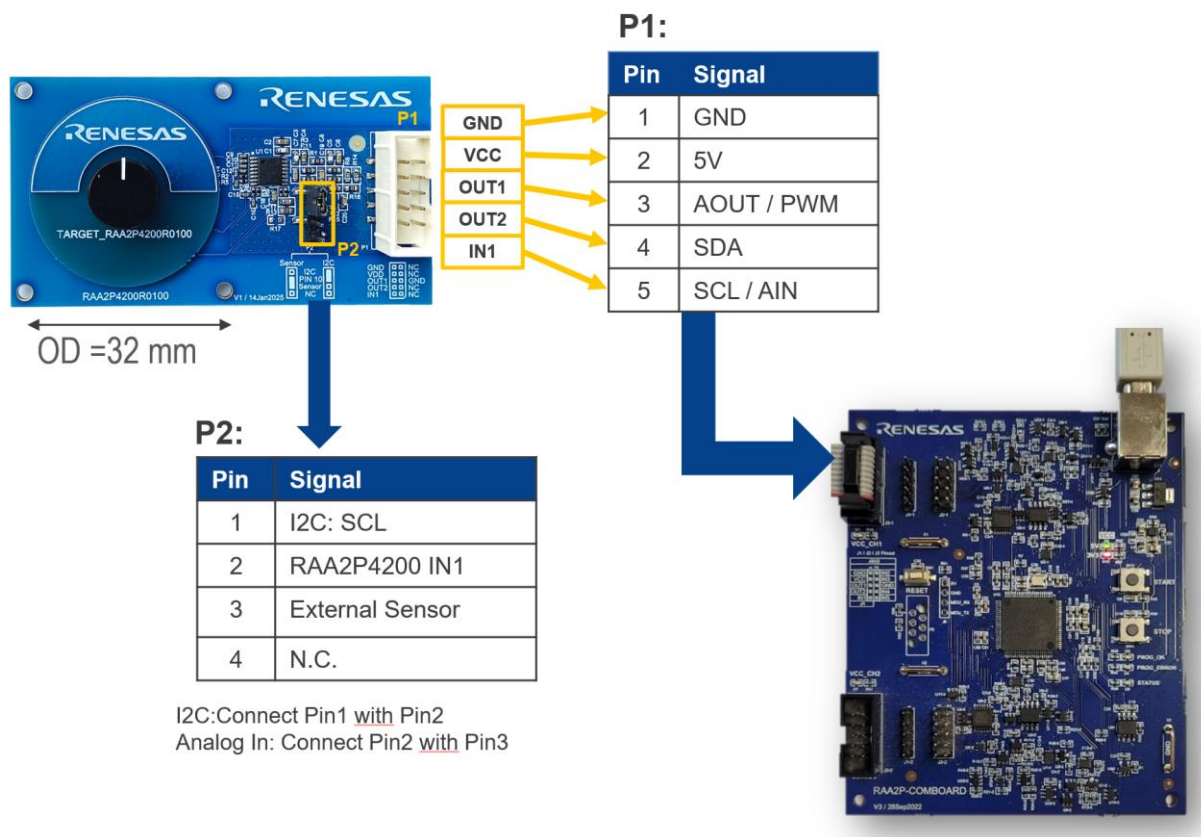


Figure 3. RAA2P4200R0100 Module Settings and Connections

2.2 RAA2P4200L100 Module

RAA2P4200L100 Module is a linear sensor with the following characteristics:

- Absolute linear sensing of 10cm motion range
- 14-bit resolution
- $\pm 0.082\text{mm}$ accuracy
- I2C, analog and PWM interfaces are available

Modify the connection of the P2 header on the sensor module depending on the needed interface and functionality as the following:

- Connect Pin1 with Pin2 for I2C use
- Connect Pin2 with Pin3 for Analog In usage with an external sensor

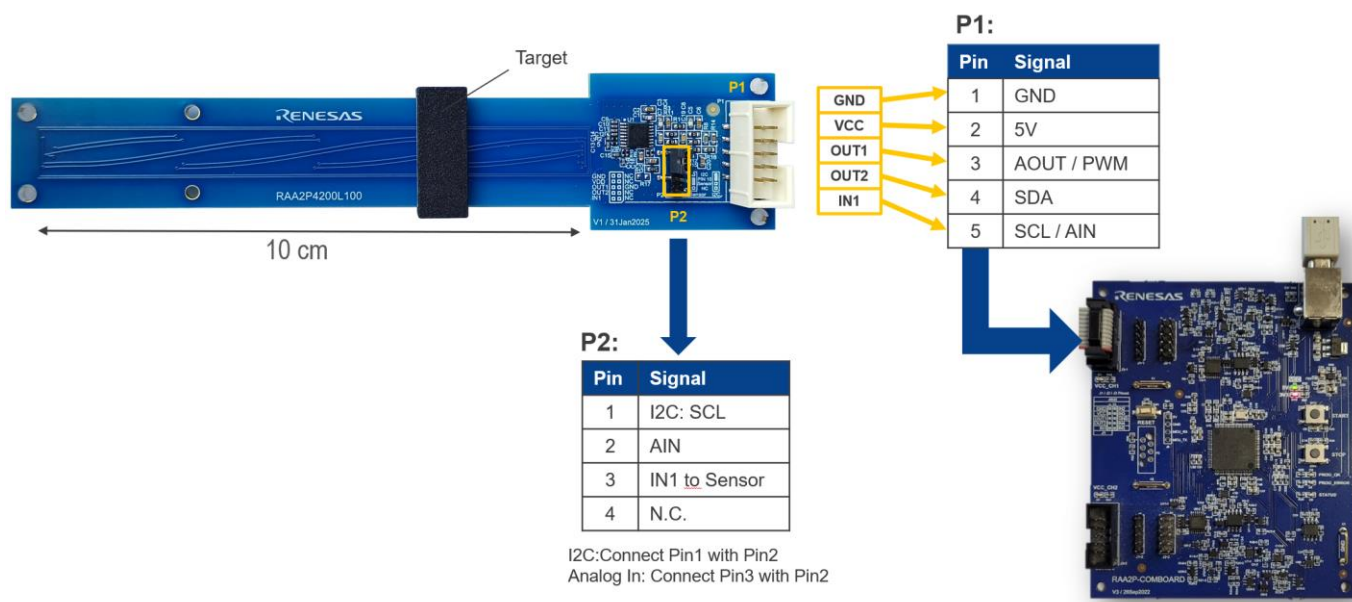


Figure 4. RAA2P4200L100 Module Settings and Connections

2.3 RAA2P-COMBOARD Connections

The two sensor modules could be interfaced to the RAA2P-COMBOARD by the following steps:

1. Connect the sensor module P1 connector to the J3 header of the RAA2P-COMBOARD using the provided cable according to Figure 5
2. Connect the RAA2P-COMBOARD to your PC using the provided USB-B cable.

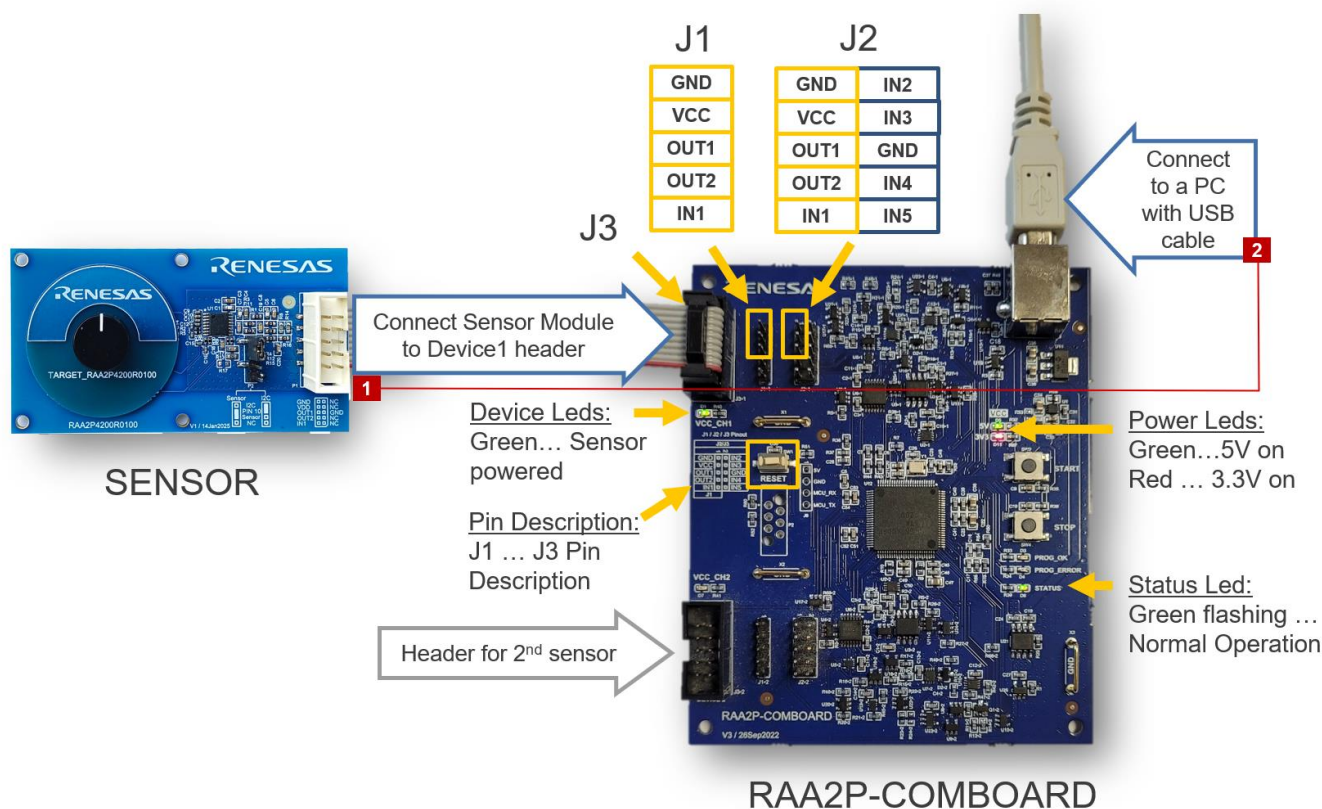


Figure 5. Evaluation Kit Connection Setup

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Position Sensor Development Tools](#) ***category:***

Click to view products by [Renesas](#) ***manufacturer:***

Other Similar products are found below :

[AS5115 PB](#) [EVB90381GLW-ACA-000](#) [1032](#) [178](#) [DPP401Z000](#) [1007214-1](#) [STEVAL-MKI136V1](#) [164](#) [OpenIMU300ZA EVK](#)
[OpenIMU330BI EVK](#) [3595](#) [AS5161-EK-AB](#) [AS5215 AB](#) [AS5715-TS_EK_AB](#) [AS5X47D-TO_EK_ST](#) [100080101-01-EVAL](#) [1050404012-](#)
[01-EVAL-COMBO](#) [105040402-01-EVAL](#) [DFR0027](#) [DFR0053](#) [SEN0252](#) [240-071](#) [DPP401A000](#) [EVB90365-Rev1.0](#) [EVB90371-GDC-300-](#)
[Rev1.0](#) [EVB90371-GGO-100-Rev1.0](#) [EVB90371-GGO-300-Rev1.0](#) [LXE3302AL002](#) [LXE3302AR001](#) [LXK3301AL003](#) [LXK3302AR001](#)
[MIKROE-4005](#) [MIKROE-4231](#) [MIKROE-1723](#) [MIKROE-3300](#) [MIKROE-4827](#) [MIKROE-4991](#) [MIKROE-6050](#) [MIKROE-6398](#) [MIKROE-](#)
[6514](#) [SCA3100-D04-PCB](#) [SCC433T-K03-PCB](#) [SCHA63T-K03-PCB](#) [SCL3300-D01-PCB](#) [NCS32100-GEVK](#) [RTKA2P3200S00000BE](#)
[RTKA2P3226S00000BE](#) [RTKA2P3226S00L00BE](#) [RTKA2P4200S00000BE](#) [RTKA2P4500S00000BE](#)