

TWM/TWW Series

Ceramic Housed Radial Terminal Power



The TWM/TWW series radial terminal power resistors offer significant board space savings over axial terminal products. Generated heat is also kept away from the circuit board.

They are recommended for commercial applications requiring low cost.

FEATURES

- Economical Commercial Grade for general purpose use
- Wirewound and Metal Oxide construction
- Wide resistance range
- Flameproof inorganic construction




SERIES SPECIFICATIONS

Series	Wattage	Resistance	Voltage	Element
TWW3	3	0.01-39Ω	250	Wire
TWW5	5	0.01-47Ω	350	Wire
TWW10	10	0.04-990Ω	750	Wire
TWM3	3	43-50KΩ	250	Metal oxide
TWM5	5	51-50KΩ	350	Metal oxide
TWM10	10	1000-50KΩ	750	Metal oxide

CHARACTERISTICS

Housing	Ceramic
Core	Fiberglass
Filling	Cement based
Tolerance	5% standard
Temperature coefficient	0.01-20Ω ±400ppm/°C; >20-10Ω ±350ppm/°C
Dielectric withstand voltage	1,000VAC
Short time overload	TWW: 10x rated power for 5 sec.; TWM: 5x rated power for 5 sec.
Operating Temperature	-55°C to 275°C
Storage Temperature	15°C-35°C, humidity: 25%-75%

Derating




(continued)

TWM/TWW Series

Ceramic Housed Radial Terminal Power

DIMENSIONS

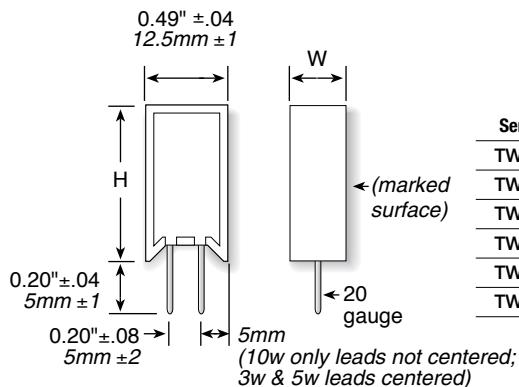

Series	Height (in./mm) ±1mm	Width
TWW3	0.98 / 25	0.33 / 8.5
TWW5	0.98 / 25	0.35 / 9
TWW10	1.97 / 50	0.35 / 9
TWM3	0.98 / 25	0.33 / 8.5
TWM5	0.98 / 25	0.35 / 9
TWM10	1.97 / 50	0.35 / 9

HOW TO ORDER

T W W 3 J R 0 5 E
 Tolerance
 J = 5% E = RoHS compliant
 Series
 TWM = Ceramic housed metal oxide radial
 TWW = Ceramic housed wirewound radial
 Wattage Resistance Value
 Example:
 R05 = 0.05Ω
 R56 = 0.56Ω
 1R0 = 1Ω
 8R2 = 8.2Ω
 270 = 270Ω
 1K0 = 1,000Ω
 8K2 = 8,200Ω
 10K = 10,000Ω

Standard part numbers for TWW series

Ohmic value	Part No. Prefix ▶ Suffix ▼	3 Wattage TWW3J-	5 Wattage TWW5J-	3 Wattage TWW10J-10	Ohmic value	Part No. Prefix ▶ Suffix ▼	3 Wattage TWW3J-	5 Wattage TWW5J-	3 Wattage TWW10J-10
0.01 — R01E	✓ ✓ ✓	1.5 — 1R5E	✓ ✓ ✓	39 — 39RE	✓ ✓ ✓	39 — 39RE	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.02 — R02E	✓ ✓ ✓	2.0 — 2R0E	✓ ✓ ✓	43 — 43RE	✓ ✓ ✓	43 — 43RE	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.03 — R03E	✓ ✓ ✓	2.7 — 2R7E	✓ ✓ ✓	47 — 47RE	✓ ✓ ✓	47 — 47RE	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.04 — R04E	✓ ✓ ✓ ✓	3.0 — 3R0E	✓ ✓ ✓	56 — 56RE	✓ ✓ ✓	56 — 56RE	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.05 — R05E	✓ ✓ ✓ ✓	3.3 — 3R3E	✓ ✓ ✓	68 — 68RE	✓ ✓ ✓	68 — 68RE	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.10 — R10E	✓ ✓ ✓	3.9 — 3R9E	✓ ✓ ✓	75 — 75RE	✓ ✓ ✓	75 — 75RE	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.15 — R15E	✓ ✓ ✓	4.3 — 4R3E	✓ ✓ ✓	82 — 82RE	✓ ✓ ✓	82 — 82RE	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.20 — R20E	✓ ✓ ✓	4.7 — 4R7E	✓ ✓ ✓	100 — 100E	✓ ✓ ✓	100 — 100E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.27 — R27E	✓ ✓ ✓	5.6 — 5R6E	✓ ✓ ✓	150 — 150E	✓ ✓ ✓	150 — 150E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.30 — R30E	✓ ✓ ✓	6.8 — 6R8E	✓ ✓ ✓	200 — 200E	✓ ✓ ✓	200 — 200E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.33 — R33E	✓ ✓ ✓	7.5 — 7R5E	✓ ✓ ✓	270 — 270E	✓ ✓ ✓	270 — 270E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.39 — R39E	✓ ✓ ✓	8.2 — 8R2E	✓ ✓ ✓	300 — 300E	✓ ✓ ✓	300 — 300E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.43 — R43E	✓ ✓ ✓	10 — 10RE	✓ ✓ ✓	330 — 330E	✓ ✓ ✓	330 — 330E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.47 — R47E	✓ ✓ ✓	15 — 15RE	✓ ✓ ✓	390 — 390E	✓ ✓ ✓	390 — 390E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.56 — R56E	✓ ✓ ✓	20 — 20RE	✓ ✓ ✓	430 — 430E	✓ ✓ ✓	430 — 430E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.68 — R68E	✓ ✓ ✓	22 — 22RE	✓ ✓ ✓	470 — 470E	✓ ✓ ✓	470 — 470E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.75 — R75E	✓ ✓ ✓	27 — 27RE	✓ ✓ ✓	560 — 560E	✓ ✓ ✓	560 — 560E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
0.82 — R82E	✓ ✓ ✓	30 — 30RE	✓ ✓ ✓	680 — 680E	✓ ✓ ✓	680 — 680E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
1.0 — 1R0E	✓ ✓ ✓	33 — 33RE	✓ ✓ ✓	750 — 750E	✓ ✓ ✓	750 — 750E	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓
				820 — 820E	✓ ✓ ✓				

Standard part numbers for TWM series

Ohmic value	Part No. Prefix ▶ Suffix ▼	3 Wattage TWM3J-	5 Wattage TWM5J-	3 Wattage TWM10J-10	Ohmic value	Part No. Prefix ▶ Suffix ▼	3 Wattage TWM3J-	5 Wattage TWM5J-	3 Wattage TWM10J-10
43 — 43RE	✓				750 — 750E	✓	✓	✓	✓
47 — 47RE	✓				820 — 820E	✓	✓	✓	✓
56 — 56RE	✓ ✓				1000 — 1K0	✓	✓	✓	✓
68 — 68RE	✓ ✓				1500 — 1K5	✓	✓	✓	✓
75 — 75RE	✓ ✓				2000 — 2K0	✓	✓	✓	✓
82 — 82RE	✓ ✓				2700 — 2K7	✓	✓	✓	✓
100 — 100E	✓ ✓				3000 — 3K0	✓	✓	✓	✓
150 — 150E	✓ ✓				3300 — 3K3	✓	✓	✓	✓
200 — 200E	✓ ✓				3900 — 3K9	✓	✓	✓	✓
270 — 270E	✓ ✓				4300 — 4K3	✓	✓	✓	✓
300 — 300E	✓ ✓				4700 — 4K7	✓	✓	✓	✓
330 — 330E	✓ ✓				5600 — 5K6	✓	✓	✓	✓
390 — 390E	✓ ✓				6800 — 6K8	✓	✓	✓	✓
430 — 430E	✓ ✓				7500 — 7K5	✓	✓	✓	✓
470 — 470E	✓ ✓				8200 — 8K2	✓	✓	✓	✓
560 — 560E	✓ ✓				10000 — 10K	✓	✓	✓	✓
680 — 680E	✓ ✓								

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Metal Oxide Resistors category:

Click to view products by Ohmite manufacturer:

Other Similar products are found below :

[009260C FA87/180R/5% ROX1SJ4R7 R0229 M012CT52R220J WK80922003900J5C00 434529B WMO5S-100KJA05 ROX1SJ12K](#)
[ROX1SJ270K 054084X 054211G 054220E 095734G RS02B887R0FE73 RSS2W470RJTB RSS3470RJTB ROX3SJR22](#)
[WR404140A2208JFE00 RSS551KJ RSS3150RJTB ROX5SJ39K MOSX1CT528R2R20F MHR0314SA207F70 RSF-25JT-52-120R](#)
[RSF50SJT-52-330K RSF2WSJT-52-60R RSF-25JT-52-2M RSF50SJT-52-1M RSF100JT-52-360K RSF50SJT-52-22R RSF50SJT-52-15R](#)
[RSF200JT-73-280R RSF50SJT-52-0R5 RSF-25JT-52-1M2 RSF200JT-73-0R2 RSF-50JT-52-2K5 MO1W-150R±5%-TT63 MO3W-200R±5%-9T73 ROX2SJ4K3 ROX5SJ120R ROX3SJR10 ROX2SJ200K CPF2200R00JKRE6 LVR01R0200FE73 HR1206J47RP05](#)
[HR1206J1MP05 HR1206F430KP05 HR1206F680KP05 HR1206J100RP05](#)