



AEC-Q200


This component was always RoHS compliant from the first date of manufacture.

- **Low-loss UHF SAW Filter**
- **3.0 x 3.0 mm Surface-mount Package**
- **Complies with Directive 2002/95/EC (RoHS)**



SF2472E

**869 MHz
SAW Filter**



SM3030-8


Maximum Rating

Rating	Value	Units
DC Voltage on any Non-ground Terminal	3	V
Input Power Level: Pass Band:	33	dBm
Stop Band:	15	dBm
Operable Temperature Range	-45 to +125	°C
Specification Temperature Range	0 to +50	°C
Storage Temperature Range	-40 to +85	°C
Moisture Sensitivity Level	1	MSL

Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	f_C			869		MHz
Maximum Insertion Loss, 698 to 862 MHz (0 to +25°C) (+25 to +50°C) 880 to 960 MHz 1710 to 1880 MHz	$I_{L_{MAX}}$			1.9	2.5	dB
				1.9	2.9	
				1.0	2.5	
				1.7	2.5	
Attenuation, 0 dB Reference: 868 to 870 MHz			20	24		dB
Temperature Coefficient of frequency				-36		ppm/k
Source Impedance Z_S				50		ohm
Load Impedance Z_L				50		


Case Style	SM3030-8 3.0 x 3.0 mm Nominal Footprint		
Lid Symbolization, Y=year, WW=week, S=shift, dot=pin 1 indicator	B7_YWWS		
Standard Reel Quantity	Reel Size 7 inch	500 Pieces/Reel	
	Reel Size 13 inch	3000 Pieces/Reel	

Electrical Connections	
Input	2
Output	6
All Others	1, 3, 4, 5, 7, 8

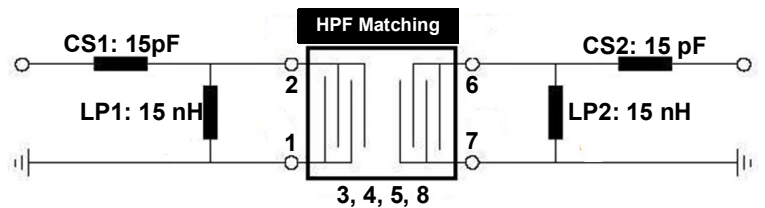


Transfer Function


Span: 100 MHz

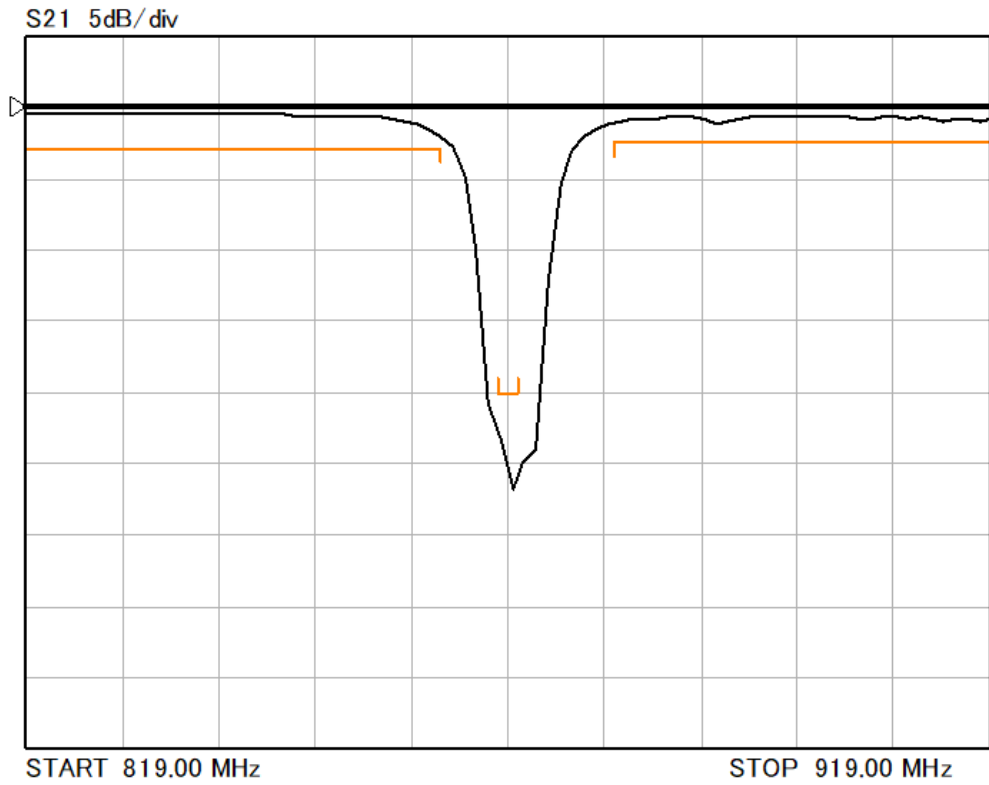

Span: 2000 MHz

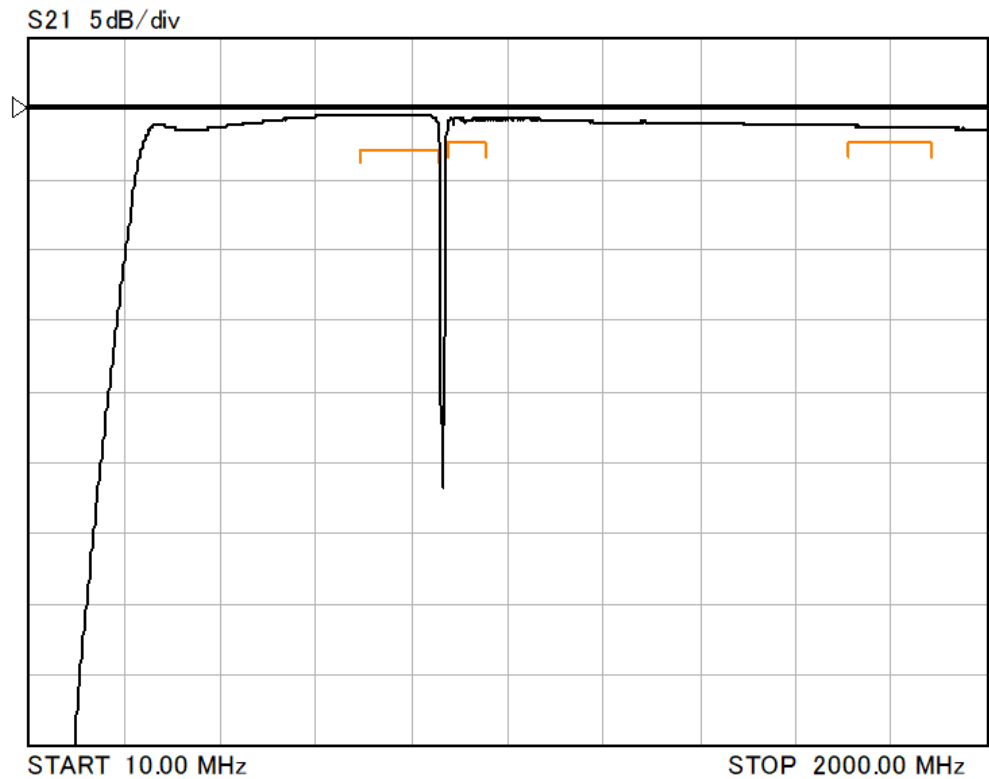

8-Terminal Ceramic Surface-Mount Case 3.0 x 3.0 mm Nominal Footprint

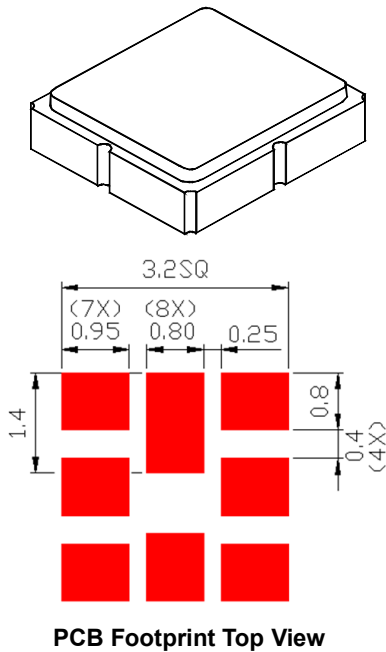

Case and PCB Footprint Dimensions


Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	2.90	3.00	3.10	0.114	0.118	0.122
B	2.90	3.00	3.10	0.114	0.118	0.122
C	0.90	1.00	1.10	0.035	0.039	0.043
D	0.79	0.92	1.05	0.031	0.036	0.041
E	0.62	0.75	0.88	0.024	0.029	0.034
F	0.47	0.60	0.73	0.018	0.023	0.028
G	0.50	0.60	0.70	0.019	0.023	0.027
H	1.10	1.20	1.30	0.043	0.047	0.051

Case Materials

Materials	
Solder Pad Plating	0.3 to 1.0 μm Gold over 1.27 to 8.89 μm Nickel
Lid Plating	2.0 to 3.0 μm Nickel
Body	Al_2O_3 Ceramic
Pb Free	


TOP VIEW

BOTTOM VIEW

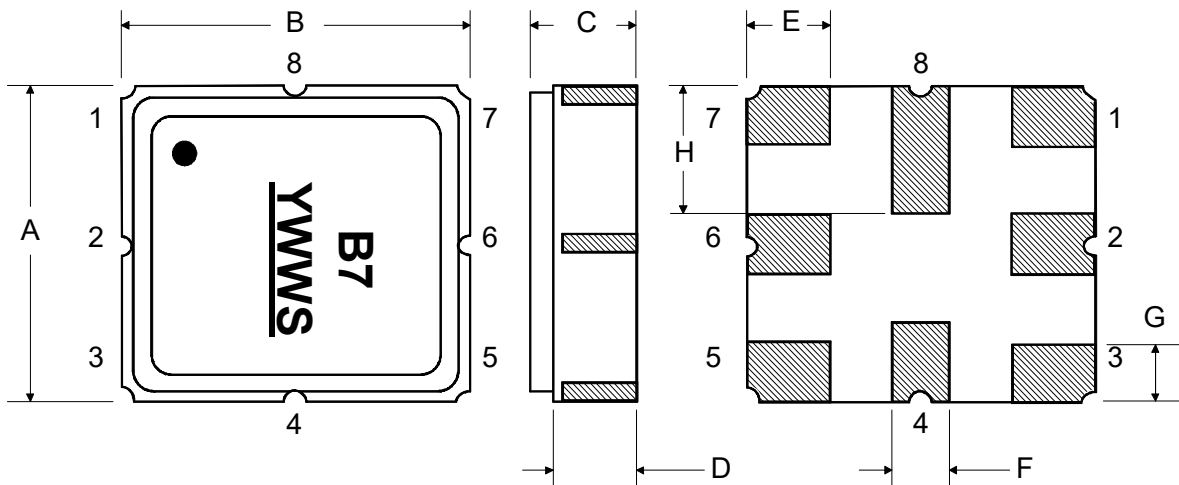

Tape and Reel Specifications


Tape and Reel Standard per ANSI/EIA481

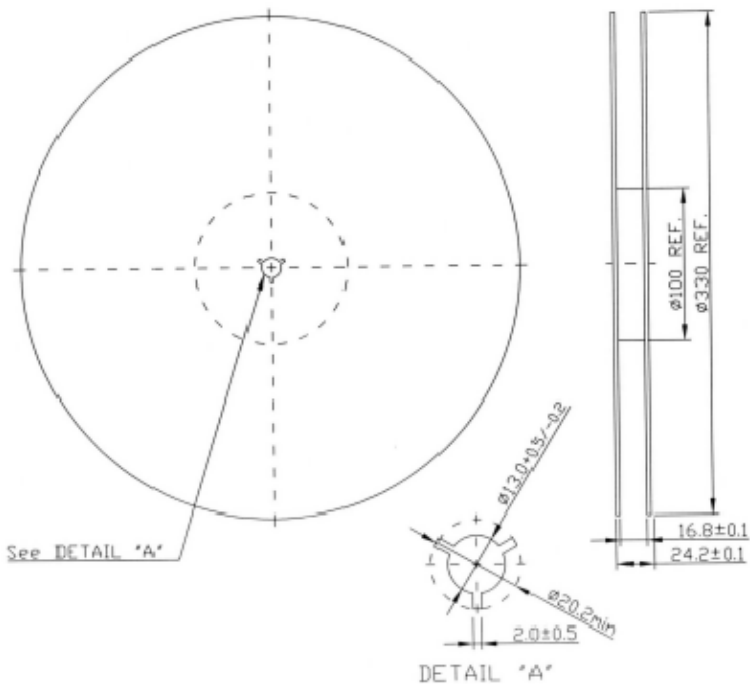

"B" Nominal Size		Quantity Per Reel
Inches	millimeters	
7	178	500
13	330	3000


Carrier Tape Dimensions	
Ao	3.35 mm
Bo	3.35 mm
Ko	1.4 mm
Pitch	8.0 mm
W	12.0 mm

COMPONENT ORIENTATION and DIMENSIONS

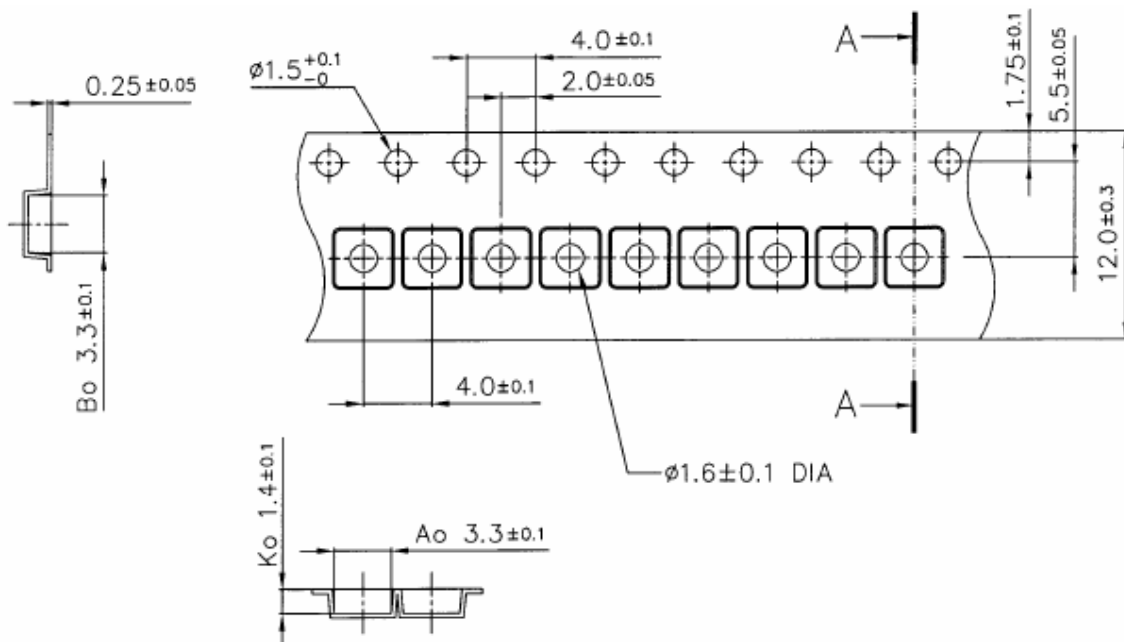

Recommended Reflow Profile

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C+0/-5°C peak (20~40sec).
4. Time: 2 times.

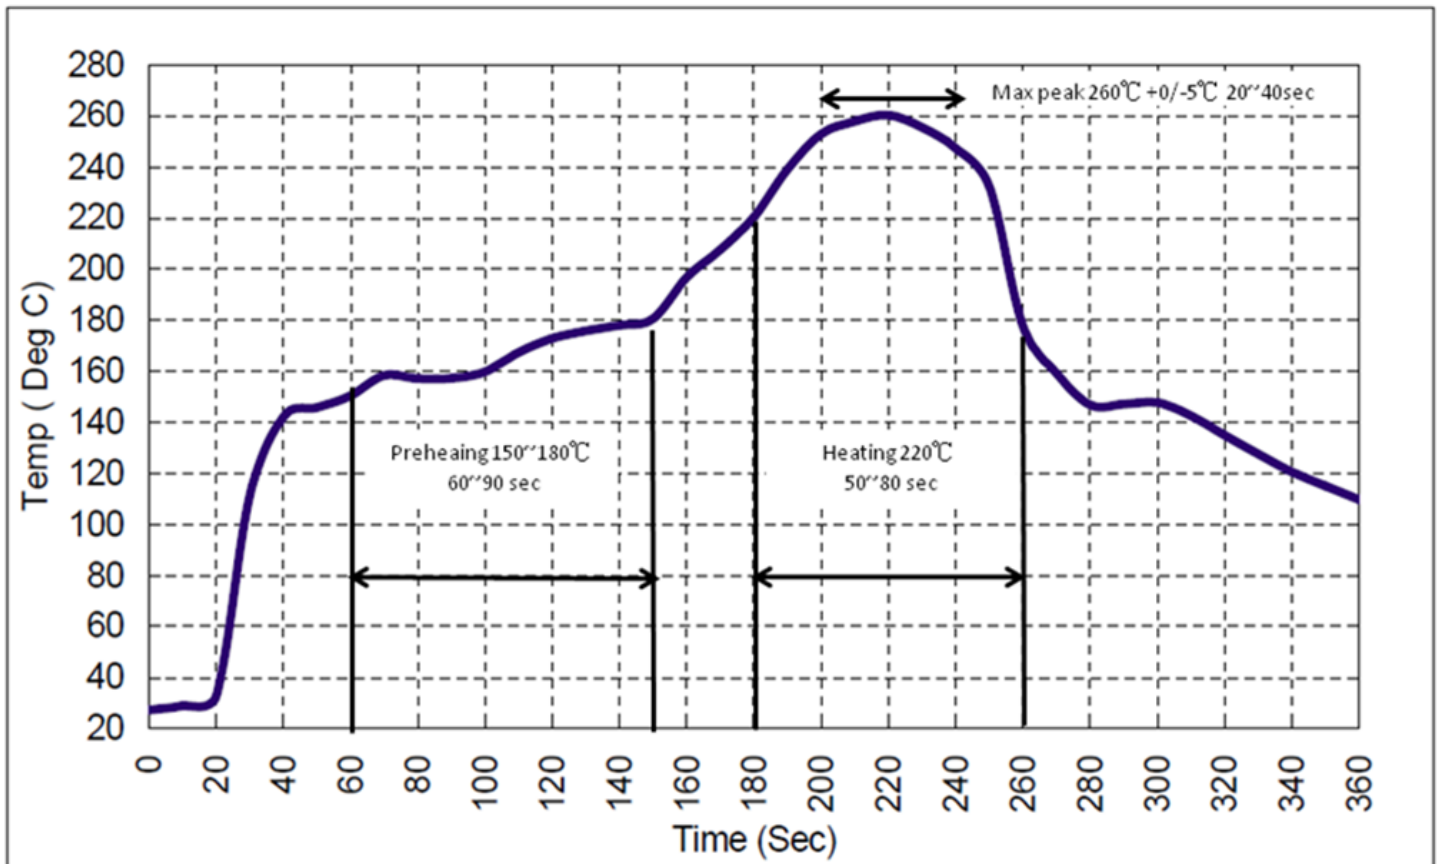

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning category](#):

Click to view products by [RFMi manufacturer](#):

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#)
[CDBLB455KCAX39-B0](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#)
[2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [MACP-008125-CK07F0](#) [DS-329-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#)
[8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [B39000Z3410A4](#) [DSS-333-](#)
[PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#) [B39781B8005P810](#) [B39881B8013P810](#) [B39791B8039P810](#) [B39771B8035P810](#)
[B39741B8012P810](#) [B39212B8033P810](#)