


Feature


- Tolerance: $\pm 0.5\% \sim \pm 5\%$
- Application automobile industry, comply with the relevant provisions of AEC-Q200.
- Anti-sulfurized performance: H₂S 3~5ppm, 50°C $\pm 2^\circ\text{C}$, 91%~93%RH, 1000H
- Resistance range: 1 Ω ~10M Ω , 0 Ω
- Operating temperature range: -55°C ~ +155°C
- Stable electrical capability, high reliability
- Suit for reflow & wave soldering
- RoHS complaint

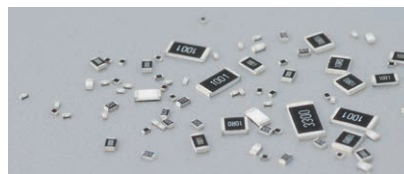


Application

- Intelligent home appliances
- High-end computer
- Medical equipment
- Industrial equipment
- Outdoor electronic application

Derating Curve

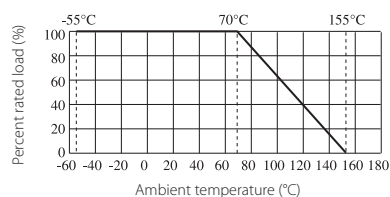

Figures

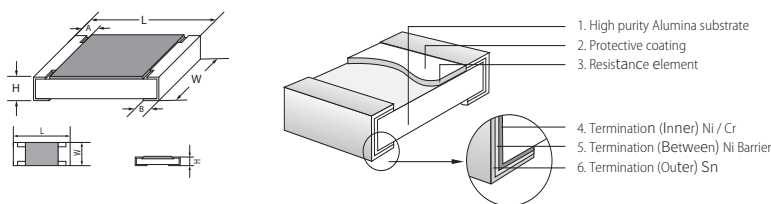

Dimension (mm)

TType	L	W	H	A	B
CQ01 (0201)	0.60 $\pm$ 0.03	0.30 $\pm$ 0.03	0.23 $\pm$ 0.03	0.12 $\pm$ 0.05	0.15 $\pm$ 0.05
CQ02 (0402)	1.00 $\pm$ 0.10	0.50 $\pm$ 0.05	0.35 $\pm$ 0.05	0.20 $\pm$ 0.10	0.25 $\pm$ 0.10
CQ03 (0603)	1.60 $\pm$ 0.10	0.80 $\pm$ 0.10	0.45 $\pm$ 0.10	0.30 $\pm$ 0.20	0.30 $\pm$ 0.20
CQ05 (0805)	2.00 $\pm$ 0.15	1.25 ^{+0.15} _{-0.10}	0.55 $\pm$ 0.10	0.40 $\pm$ 0.20	0.40 $\pm$ 0.20
CQ06 (1206)	3.10 $\pm$ 0.15	1.55 ^{+0.15} _{-0.10}	0.55 $\pm$ 0.10	0.45 $\pm$ 0.20	0.45 $\pm$ 0.20
CQ07 (1210)	3.10 $\pm$ 0.10	2.60 $\pm$ 0.20	0.55 $\pm$ 0.10	0.50 $\pm$ 0.25	0.50 $\pm$ 0.20
CQ10 (2010)	5.00 $\pm$ 0.10	2.50 $\pm$ 0.20	0.55 $\pm$ 0.10	0.60 $\pm$ 0.25	0.50 $\pm$ 0.20
CQ12 (2512)	6.35 $\pm$ 0.10	3.20 $\pm$ 0.20	0.55 $\pm$ 0.10	0.60 $\pm$ 0.25	0.50 $\pm$ 0.20


Specification

Type	Power (70°C)	Tolerance	Resistance Range	Max Working Voltage	Max Overload Voltage	Dielectric With-standing Voltage	Resistance Value of Jumper	Rated Current of Jumper	Max. Current of Jumper	Operating Temperature Range
CQ01(0201)	1/20W	$\pm 0.5\%$ $\pm 1\%$ $\pm 2\%$ $\pm 5\%$	0 Ω 1 Ω ~10M Ω	25V	50V	/	<50m Ω	0.5A	1A	-55~+155°C
CQ02(0402)	1/16W			50V	100V	100V	<50m Ω	1A	2A	
CQ03(0603)	1/10W			75V	150V	300V	<50m Ω	1A	2A	
CQ05(0805)	1/8W			150V	300V	500V	<50m Ω	2A	5A	
CQ06(1206)	1/4W			200V	400V	500V	<50m Ω	2A	10A	
CQ07(1210)	1/2W			200V	500V	500V	<50m Ω	2A	10A	
CQ10(2010)	3/4W			200V	500V	500V	<50m Ω	2A	10A	
CQ12(2512)	1W			200V	500V	500V	<50m Ω	2A	10A	

Performance Specification

Test Item	Reference standard	Test Methods	Evaluation Criteria
Temperature Coefficient of Resistance	MIL-STD-202 Method 304	Measure between: -55°C ~+155°C	CQ01: $1\Omega \leq R \leq 10\Omega$: -100~+350ppm/°C >10Ω: ±200ppm/°C CQ02-CQ12: 1Ω≤R≤10Ω: ±200ppm/°C >10Ω: ±100ppm/°C
Pre- and Post-Stress Electrical Test (Short time Overload)	AEC-Q200 TEST 1 IEC60115 4.13	2.5x Rated voltage or Max. Overload Voltage whichever is lower for 5 seconds, then check the resistance.	±1%: ±(1.0%+0.05Ω) ±5%: ±(2.0%+0.05Ω)
Biased Humidity	AEC-Q200 TEST 7 MIL-STD-202 Method 103	1000 hours 85°C/85%RH. Note: Specified conditions:10% of operating power. Measurement at 24±4 hours after test conclusion.	±1%: ±(1.0%+0.05Ω) ±5%: ±(3.0%+0.05Ω)
Operational Life	AEC-Q200 TEST 8 MIL-STD-202 Method 108	1,000 hours at 125°C, applied de-rated (36%) power of continuous working voltage, 1.5 hours on, 0.5 hour off.	±1%: ±(1.0%+0.1Ω) ±5%: ±(3.0%+0.1Ω)
Resistance to Soldering Heat	AEC-Q200 TEST 15 MIL-STD-202 Method 210	Condition B No pre-heat of samples. Note: Single Wave Solder - Procedure 2 for SMD and Procedure 1 for Leaded with solder within 1.5mm of device body.	±(1.0%+0.05Ω)
Solderability	AEC-Q200 TEST 18 J-STD-002	SMD. Electrical test not required. Magnification 50 X. Conditions: 1. Baking 4 hours@155°C dry heat, dipping @ 245±3°C for 5±0.5 second. 2. Steam aging 8 hours, dipping @ 260±3°C for 30±0.5 second.	Coverage must be over 95%.
Board Flex	AEC-Q200 TEST 21 AEC-Q200-005	Bending 3mm(CQ01-CQ05)/2mm(CQ06-CQ12)for 60±5sec	±(1.0%+0.05Ω)
Sulfuration test		H ₂ S 3~5PPM 50°C±2°C 91%~93% RH 1000H	±5%: ±(5.0%+0.05 Ω) ±1%: ±(1.0%+0.05 Ω)

Ordering Procedure (Example: CQ06 1/4W 5% 1.2 Ω T/R-5000)

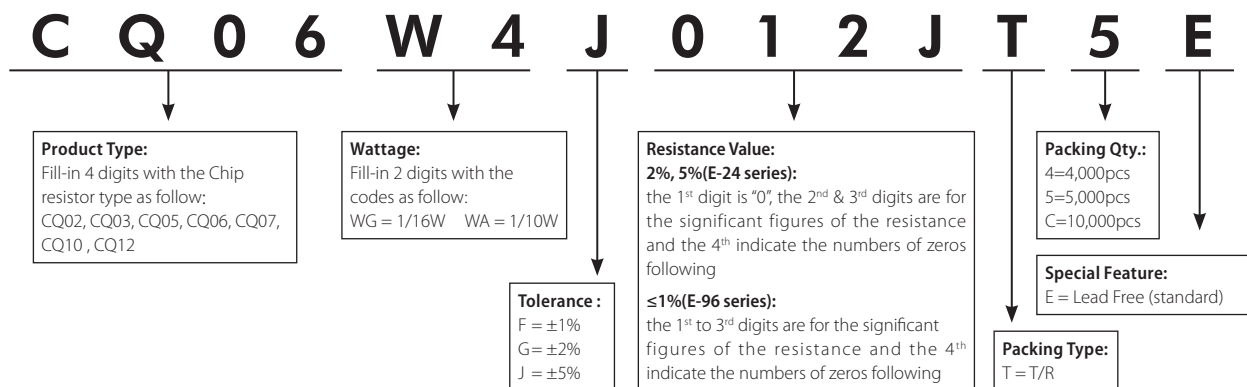

Remark: For more details, please check page 135, Part No. System

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD](#) *category:*

Click to view products by [Royal Ohm](#) *manufacturer:*

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [CR-12FP4--324R](#) [CR-12JP4--680R](#) [CRCW04021K20FKEE](#) [CRCW06032K10FKEC](#)
[CRCW06036K80FKEE](#) [M55342K03B499DRS6](#) [M55342K06B10D0RS6](#) [M55342K06B14E0RS6](#) [M55342K06B1E78RS3](#)
[M55342K06B24E9RS6](#) [M55342K06B6E19RWL](#) [M55342K06B6E81RS3](#) [M55342M05B200DRWB](#) [M55342M06B26E7RS3](#)
[M55342M06B4K70MS3](#) [742C083750JTR](#) [MCR01MZPF1202](#) [MCR01MZPF1601](#) [MCR01MZPF1800](#) [MCR01MZPF6201](#)
[MCR01MZPF9102](#) [MCR01MZPJ121](#) [MCR01MZPJ125](#) [MCR01MZPJ751](#) [MCR03EZHJ103](#) [MCR03EZPFX2004](#) [MCR03EZPJ270](#)
[MCR03EZPJ821](#) [MCR10EZPF1102](#) [MCR10EZPF2700](#) [MCR18EZPJ330](#) [RC1005F1152CS](#) [RC1005F1182CS](#) [RC1005F1372CS](#)
[RC1005F183CS](#) [RC1005F1911CS](#) [RC1005F1912CS](#) [RC1005F203CS](#) [RC1005F2052CS](#) [RC1005F2431CS](#) [RC1005F3011CS](#)
[RC1005F303CS](#) [RC1005F4321CS](#) [RC1005F4642CS](#) [RC1005F471CS](#) [RC1005F4751CS](#) [RC1005F5621CS](#) [RC1005F6041CS](#)