

**MODEL:** CMI-0955-03TH | **DESCRIPTION:** MAGNETIC BUZZER INDICATOR**FEATURES**

- magnetic
- driving circuit
- through hole

**SPECIFICATIONS**

| parameter             | conditions/description        | min   | typ   | max   | units |
|-----------------------|-------------------------------|-------|-------|-------|-------|
| rated voltage         |                               |       | 3     |       | Vdc   |
| operating voltage     |                               | 2     |       | 5     | Vdc   |
| current consumption   | at 2,700 Hz, 3 Vdc            |       |       | 30    | mA    |
| rated frequency       |                               | 2,400 | 2,700 | 3,000 | Hz    |
| sound pressure level  | at 10 cm, 2,700 Hz, 3 Vdc     | 80    |       |       | dB    |
| tone                  | continuous                    |       |       |       |       |
| dimensions            | Ø9.2 x 5.5                    |       |       |       | mm    |
| weight                |                               | 0.6   | 0.7   | 0.8   | g     |
| material              | PBT (UL94HB)                  |       |       |       |       |
| terminal              | pins (brass with tin plating) |       |       |       |       |
| operating temperature |                               | -20   |       | 70    | °C    |
| storage temperature   |                               | -30   |       | 80    | °C    |
| washable              | no                            |       |       |       |       |
| RoHS                  | yes                           |       |       |       |       |


Notes: 1. All specifications measured at 25±3°C, humidity at 35~70%, under 86~106 kPa pressure, unless otherwise noted.

**SOLDERABILITY**

| parameter      | conditions/description | min | typ | max | units |
|----------------|------------------------|-----|-----|-----|-------|
| hand soldering | for 2.0±1.0 seconds    | 340 | 350 | 360 | °C    |
| wave soldering | for 2±0.5 seconds      | 250 | 255 | 260 | °C    |


MECHANICAL DRAWING

units: mm  
tolerance: ±0.5 mm

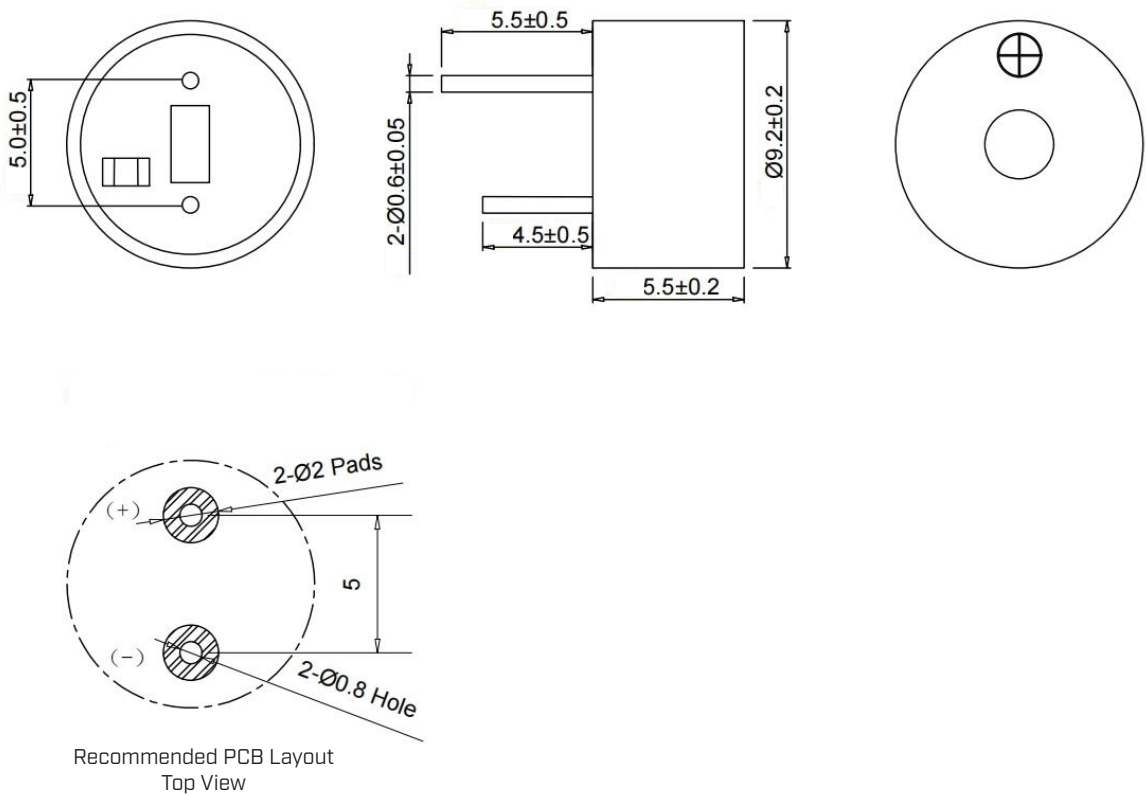


PERFORMANCE CURVES

Voltage vs. Sound Pressure Level  
at 10 cm

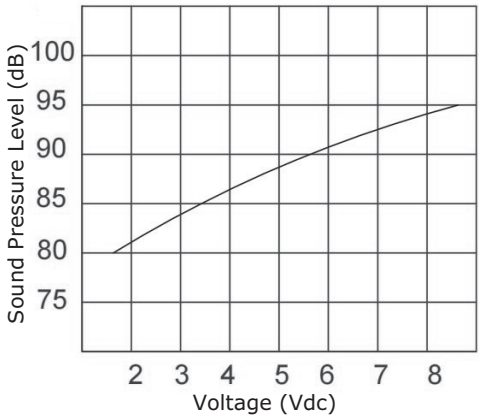

Voltage vs. Current Consumption

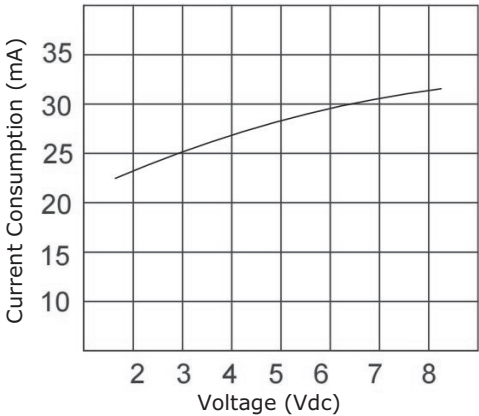

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for*** [Buzzers & Audio Indicators - Board Mount](#) ***category:***

***Click to view products by*** [Same Sky](#) ***manufacturer:***

Other Similar products are found below :

[FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PT-3534FP](#) [SC110E](#) [SC616N-2](#) [SCS045MD9DT3S](#) [F/BC 35-DR LF](#) [F/EB20P-DR LF](#)  
[FSMD8585JSLF](#) [F/TCW 05 WITH LABEL LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [F-B-P1405ISB LF](#) [F/DGX 05P WITH LABEL LF](#) [F/HCW 06 WITH LABEL LF](#) [DMT-1606S-NL](#) [SBM616J](#) [SBM616PU](#) [SC250H](#) [SC628FK](#)  
[32S4120LFPN](#) [PLD-27N35PQ](#) [SMA-17-S](#) [SC235AF](#) [SMA21-P175](#) [1602AC-23-18E-26.000000G](#) [710000013](#) [710100108](#) [710121005](#)  
[205311](#) [HNR-1704A](#) [KC1206 16](#) [FUET-1760](#) [FUET-1030H](#) [CPT-1117-83-SMT-TR](#) [CMA-6542PF](#) [CEM-1212S](#) [CMT-4023S-SMT-TR](#)  
[CMT-8504-100-SMT-TR](#) [CX-0905C](#) [FMB09A12-12V](#) [FSD-5037](#) [FUET-1365F-05](#) [FSD-3020-12V](#) [SEA-0955Y-0527-16-50P4.0](#) [KC1206R](#)  
[42](#) [FSD-2316-24V](#) [LEB1370BS-1.5S-2.4-R](#) [LEB1310BS-05S-2.4-R](#)