



MODEL: CPI-2825-95L150 | DESCRIPTION: PIEZO BUZZER INDICATOR

FEATURES

- piezo
- fast pulse tone
- wire leads



SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage			12		Vdc
operating voltage		3		24	Vdc
current consumption	at rated voltage			10	mA
rated frequency		3,000	3,500	4,000	Hz
sound pressure level	at 30 cm, rated voltage	95			dB
tone	fast pulse (3.0±20% Hz), at rated voltage				Hz
dimensions	Ø28 x 25				mm
weight			9.4		g
material	ABS 757 (UL94HB)				
terminal	wire leads (28 AWG)				
operating temperature		-20		70	°C
storage temperature		-30		80	°C
washable	no				
RoHS	yes				


Notes:

1. All specifications measured at 25±2°C, humidity at 45-60%, unless otherwise noted.


MECHANICAL DRAWING

units: mm
tolerance: ± 0.5 mm

wire: 28 AWG

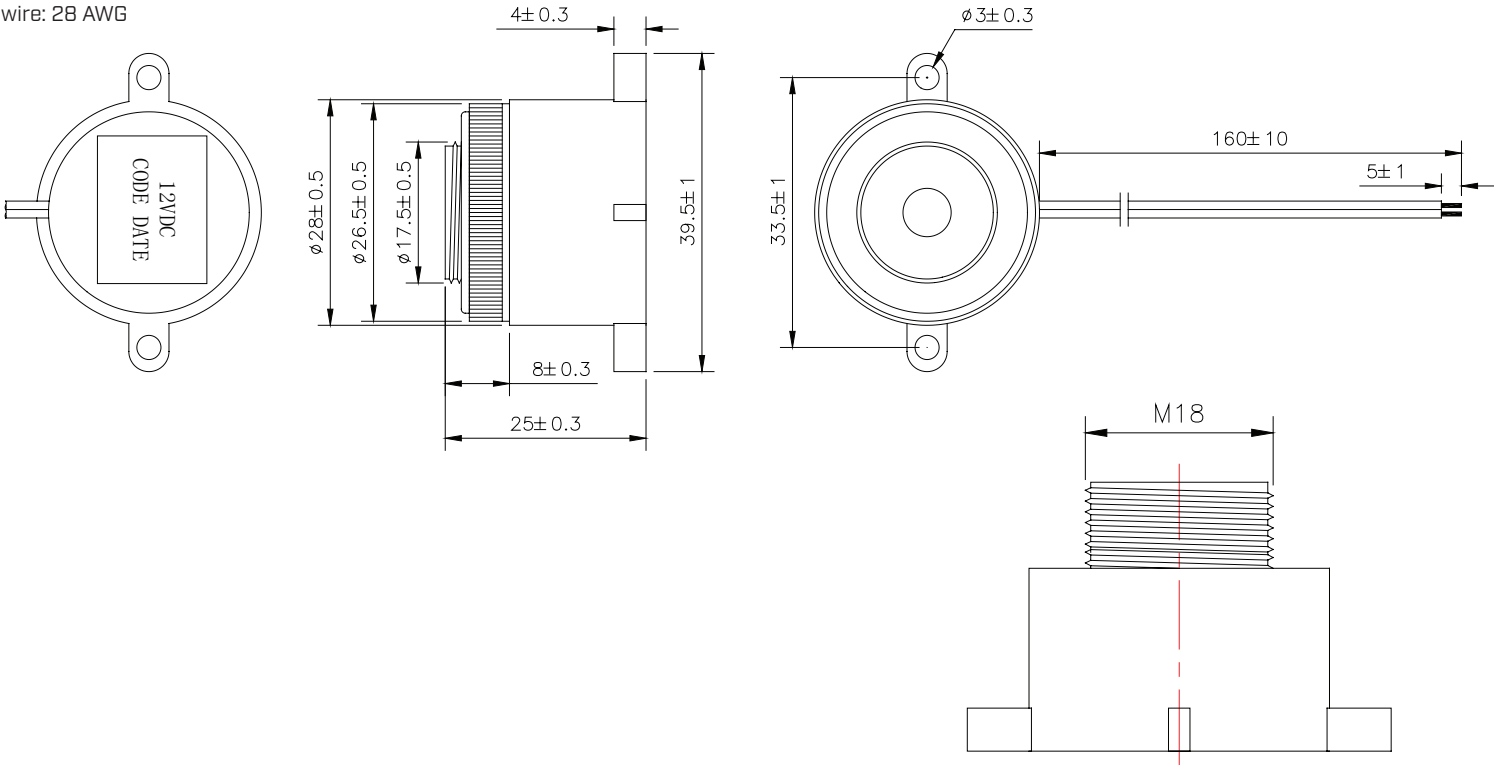

PERFORMANCE CURVES

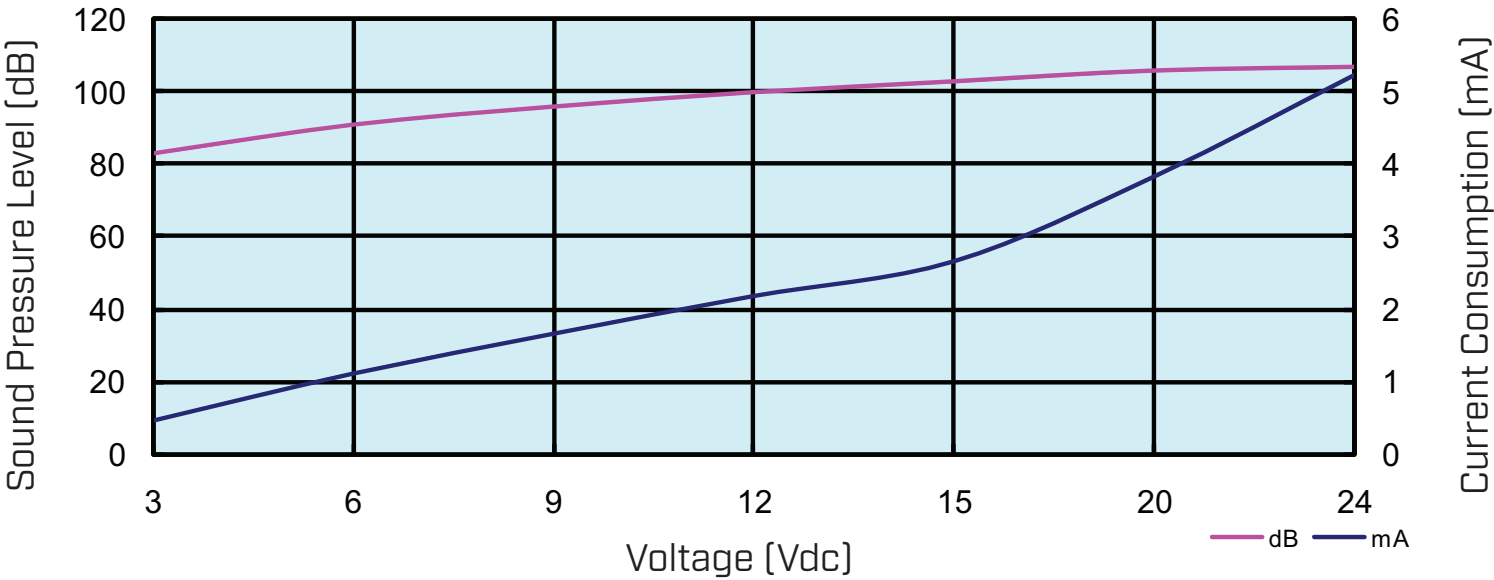

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Buzzers & Audio Indicators - Industrial](#) ***category:***

Click to view products by [Same Sky](#) ***manufacturer:***

Other Similar products are found below :

[ESZ-26B](#) [ESZ-25B-5-250B](#) [EWP-202C](#) [EBPT-407](#) [BRP2212L-12-C](#) [CPT-1604-10L100](#) [56-61000-00.22](#) [AI-2628-TF-LW100-WP-R](#)
[4890060](#) [PK-27A35EWBQ](#) [ZT016LDCTR](#) [ZT016LDSR8R](#) [22MMGASKET](#) [SCE028LD3CL1F](#) [SSX-82SC](#) [ZT028LAFP1Y](#) [SSX-82SA](#)
[SCS045MD1MGCS](#) [XB5KSB](#) [713100113](#) [PT-723B-76Q](#) [PT-593SQ](#) [PK-35H29WQ](#) [PK-26N04W-06VQ](#) [PK-26N04W-03VQ](#) [PK-](#)
[27N35EPQ](#) [PK-26N04W-24VQ](#) [PNR1](#) [ACC02](#) [710100113](#) [PB-32N10W-12K](#) [SC628AHJR](#) [ZA048SADP2](#) [SCH110NR](#) [SSX-52SB](#) [SSX-](#)
[82SR](#) [AI-4429-P-CP12-2-R](#) [M22-AMC](#) [PK-27A35EPDGQ](#) [PK-27A35EPDBQ](#) [PK-35A29W-24VQ](#) [14-810.910](#) [SC648](#) [SC628AN](#) [SC628N](#)
[SC110N](#) [SC628ANP](#) [HW1Z-P1F2PQ4Y](#) [PFD-27A35ERQ](#) [BNR1](#)