

**MODEL:** DEVKIT-MEMS-005 | **DESCRIPTION:** MICROPHONE DEVELOPMENT KIT**FEATURES**

- 4 detachable evaluation boards
- analog MEMS
- top port & bottom port
- plated through hole I/O terminals for multiple testing options







**EVAL BOARD**

	circuit	technology	output	acoustic port	size [mm]	sensitivity typ [dB]	current max [μA]
CMM-3729AB-38116-TR	MIC1	MEMS	analog	bottom	3.76 x 2.95	-38	250
CMM-2718AB-38316-TR	MIC2	MEMS	analog	bottom	2.75 x 1.85	-38	250
CMM-3722AT-42116-TR	MIC3	MEMS	analog	top	3.76 x 2.24	-42	250
CMM-3729AT-42316-TR	MIC4	MEMS	analog	top	3.76 x 2.95	-42	250

OPERATIONAL INSTRUCTIONS

This Same Sky MEMS microphone evaluation board consists of four independent analog microphone evaluation circuits. Top and bottom sound port options are provided. External bypass capacitors are included on the power supply rails of the evaluation boards and DC blocking capacitors are placed in the analog output signal paths. A DC power supply of 1.6~3.6 Volts should be connected between the VDD and GND pins of the board to be evaluated. Please refer to the respective data sheets for proper connections to the remaining signal pins.

CIRCUIT DIAGRAMS & BOARD LAYOUTS

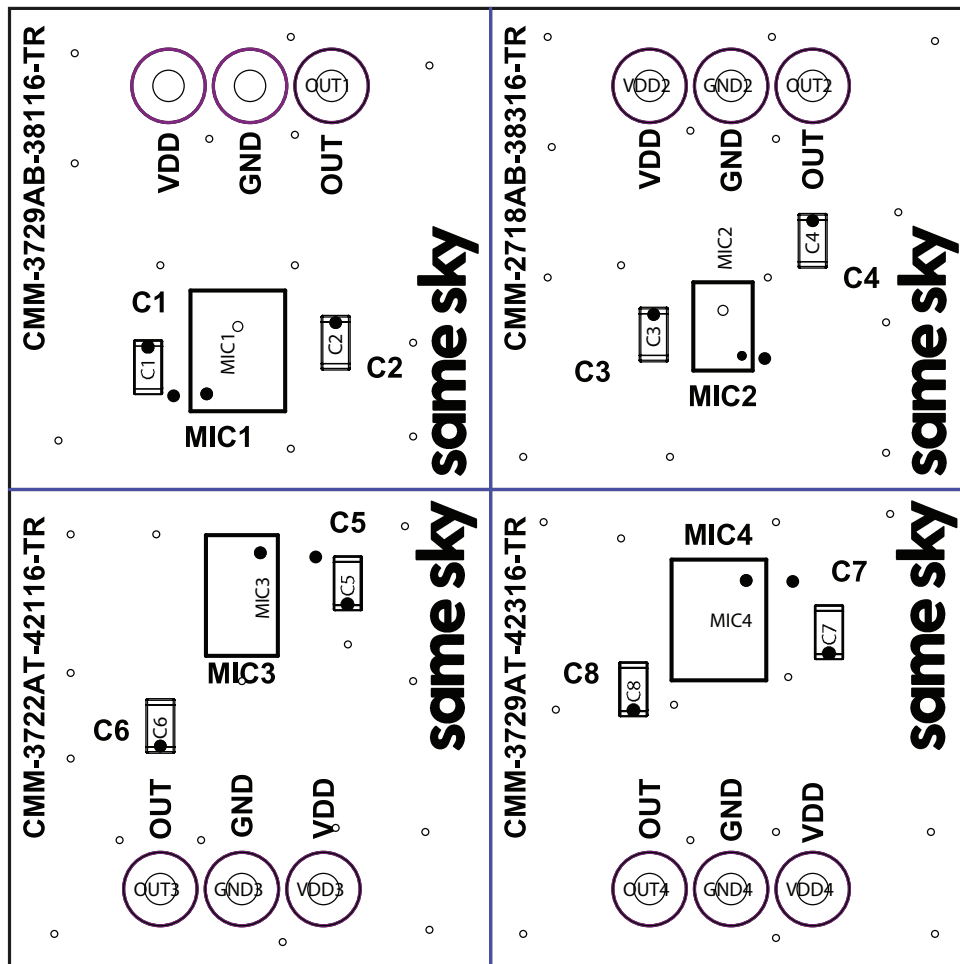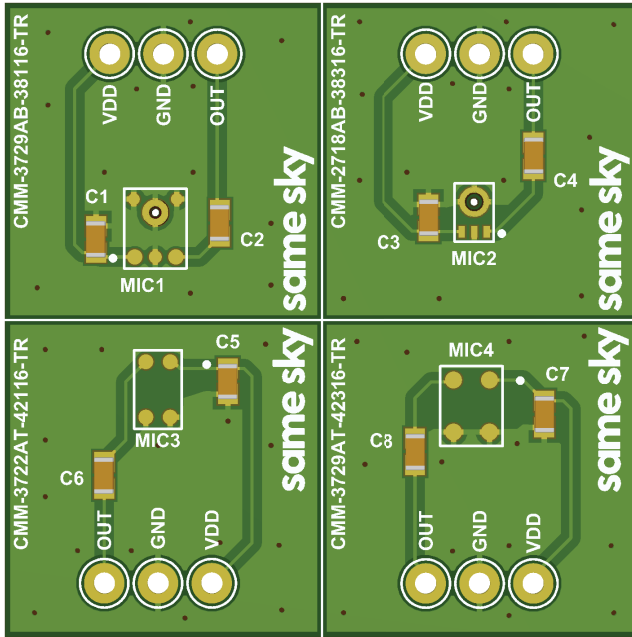

CMM-3729AB-38116-TR


WWW.SAMESKYDEVICES.COM/PRODUCT/RESOURCE/CMM-3729AB-38116-TR.PDF

ELECTRICAL

parameter	conditions/description	min	typ	max	units
directivity	omnidirectional				
sensitivity [S]	at 94 dB SPL, 1 kHz	-39	-38	-37	dB
supply voltage [V _{DD}]		1.6	2.0	3.6	V
current consumption [I _{oss}]	V _{DD} = 2.0 V		160		μA
sensitivity reduction	V _{DD} = 3.6 ~ 1.6 V		-0.5		dB
frequency [f]		100		10,000	Hz
signal to noise ratio [S/N]	at 94 dB SPL, 1 kHz (A-weighted)		57		dBA
total harmonic distortion [THD]	at 94 dB SPL, 1 kHz		0.2		%
acoustic overload point [AOP]	at 10% THD, 1 kHz		125		dB SPL
output impedance [Z _{out}]	at 1 kHz			300	Ω

Notes: 1. All specifications measured at 23±2°C, humidity at 55±20%, unless otherwise noted.

FREQUENCY RESPONSE CURVE

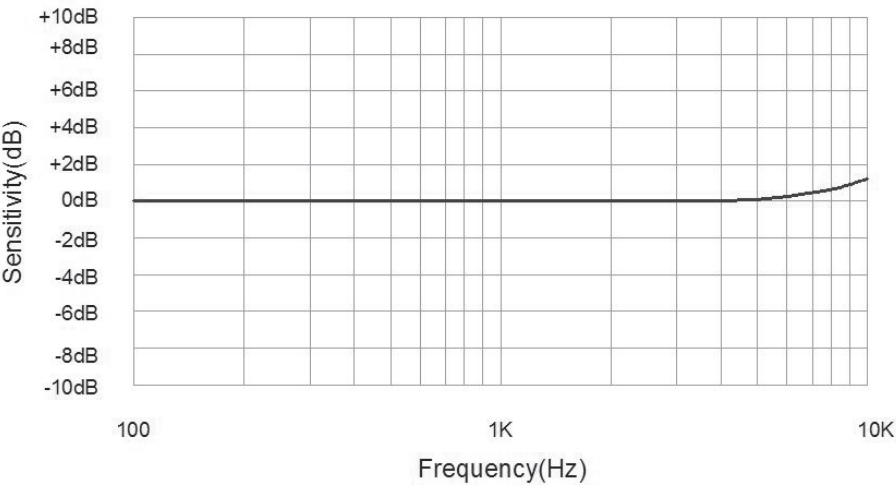

CMM-2718AB-38316-TR


WWW.SAMESKYDEVICES.COM/PRODUCT/RESOURCE/CMM-2718AB-38316-TR.PDF

ELECTRICAL

parameter	conditions/description	min	typ	max	units
directivity	omnidirectional				
sensitivity [S]	at 94 dB SPL, 1 kHz	-41	-38	-35	dB
supply voltage [V _{DD}]		1.5	2.0	3.6	V
current consumption [I _{loss}]	V _{DD} = 2.0 V		150	250	μA
frequency [f]		100		10,000	Hz
signal to noise ratio [S/N]	at 94 dB SPL, 1 kHz [A-weighted]		62		dBA
total harmonic distortion [THD]	at 94 dB SPL, 1 kHz		0.2		%
acoustic overload point [AOP]	at 10% THD, 1 kHz		126		dB SPL
output impedance [Z _{out}]	at 1 kHz			300	Ω
PSRR	200 mVp-p sine wave @ 1 kHz, V _{DD} = 2.0 V		80		dB
PSR	100 mVp-p square wave @ 217 Hz, V _{DD} = 2.0 V		-105		dBV[A]

Notes: 2. All specifications measured at 23±2°C, humidity at 55±20%, unless otherwise noted.

FREQUENCY RESPONSE CURVE

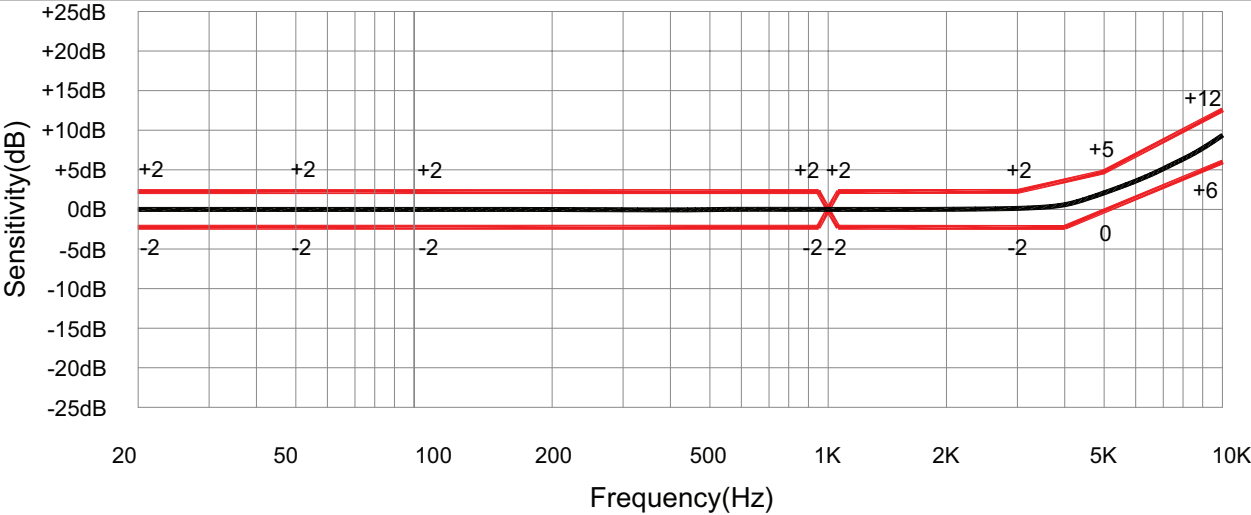

CMM-3722AT-42116-TR


WWW.SAMESKYDEVICES.COM/PRODUCT/RESOURCE/CMM-3722AT-42116-TR.PDF

ELECTRICAL

parameter	conditions/description	min	typ	max	units
directivity	omnidirectional				
sensitivity [S]	at 94 dB SPL, 1 kHz	-43	-42	-41	dB
supply voltage [V _{DD}]		1.5	2.0	3.6	V
current consumption [I _{oss}]	V _{DD} = 2.0 V		155	250	μA
frequency [f]		100		10,000	Hz
signal to noise ratio [S/N]	at 94 dB SPL, 1 kHz, BW=20-5 kHz [A-weighted]		58		dB
	at 94 dB SPL, 1 kHz, BW=20-8 kHz [A-weighted]		57		dB
	at 94 dB SPL, 1 kHz, BW=20-20 kHz [A-weighted]		56		dB
total harmonic distortion [THD]	at 94 dB SPL, 1 kHz		0.1		%
acoustic overload point [AOP]	at 10% THD, 1 kHz		130		dB SPL
output impedance [Z _{out}]	at 1 kHz			100	Ω
PSRR	200 mVp-p sine wave @ 1 kHz, V _{DD} = 2.0 V		80		dB
PSR	100 mVp-p square wave @ 217 Hz, V _{DD} = 2.0 V [A-weighted]		-105		dBV[A]

Notes: 1. All specifications measured at 23±2°C, humidity at 55±20%, unless otherwise noted.

FREQUENCY RESPONSE CURVE

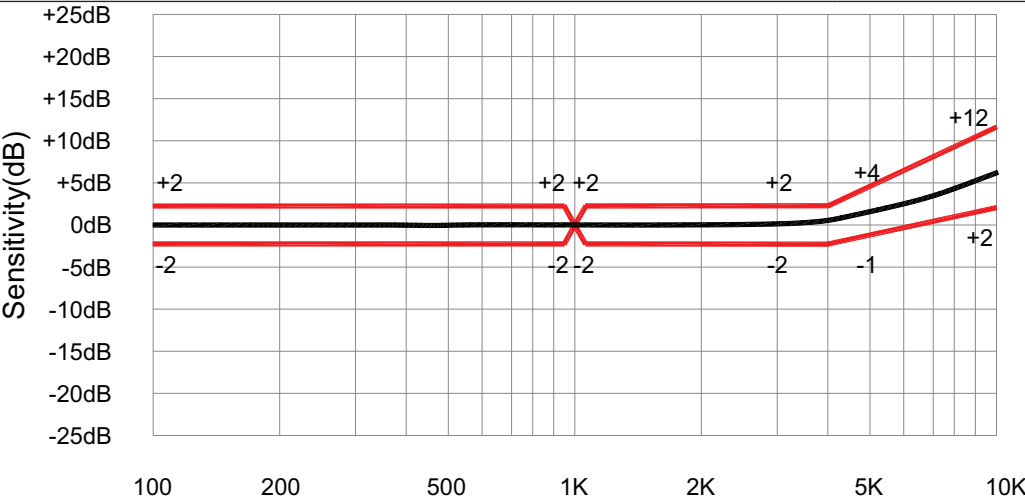

CMM-3729AT-42316-TR


WWW.SAMESKYDEVICES.COM/PRODUCT/RESOURCE/CMM-3729AT-42316-TR.PDF

ELECTRICAL

parameter	conditions/description	min	typ	max	units
directivity	omnidirectional				
sensitivity [S]	at 94 dB SPL, 1 kHz	-45	-42	-39	dB
supply voltage [V _{DD}]		1.6	2.0	3.6	V
current consumption [I _{oss}]	V _{DD} = 2.0 V		155	250	μA
sensitivity reduction	V _{DD} = 3.6 ~ 1.6 V		-0.5		dB
frequency [f]		100		10,000	Hz
signal to noise ratio [S/N]	at 94 dB SPL, 1 kHz [A-weighted]		58		dBa
total harmonic distortion [THD]	at 94 dB SPL, 1 kHz		0.1		%
acoustic overload point [AOP]	at 10% THD, 1 kHz		132		dB SPL
output impedance [Z _{out}]	at 1 kHz			300	Ω
PSRR	200 mVp-p sine wave @ 1 kHz, V _{DD} = 2.0 V		75		dB
PSR	100 mVp-p square wave @ 217 Hz, V _{DD} = 2.0 V [A-weighted]		-105		dBV[A]

Notes: 1. All specifications measured at 23±2°C, humidity at 55±20%, unless otherwise noted.

FREQUENCY RESPONSE CURVE

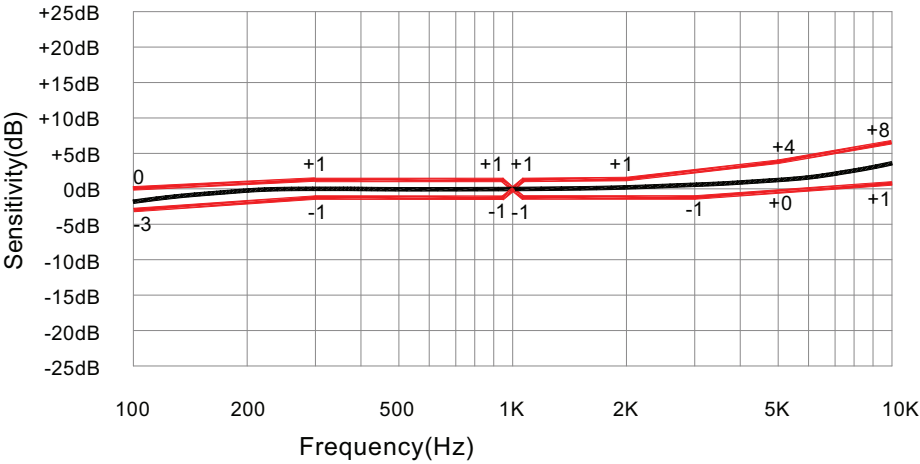

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio IC Development Tools](#) category:

Click to view products by [Same Sky](#) manufacturer:

Other Similar products are found below :

[124](#) [ETLUM2-SOM](#) [ISD5102EY](#) [1381](#) [DA7217-EVAL](#) [AC102014](#) [CDB5366](#) [CDB5340](#) [CDB42518](#) [CDB3318](#) [CDB3310](#)
[LM4780TABD/NOPB](#) [2130](#) [2220](#) [2341](#) [2342](#) [2716](#) [2716](#) [DFR0064](#) [DFR0119](#) [2217](#) [MIKROE-2720](#) [EV_ICS-40300-FX](#) [SEN-14262](#)
[DA7218-EVAL](#) [3357](#) [EV_ICS-43434-FX](#) [3346](#) [EV_ICS-40618-FX](#) [3436](#) [BOB-12758](#) [3421](#) [SOMO-II](#) [124](#) [1552](#) [1713](#) [1752](#) [1790](#) [2133](#)
[3492](#) [3885](#) [4227](#) [4346](#) [4384](#) [5769](#) [5770](#) [5791](#) [6049](#) [987](#) [AS3418_EK_ST](#)