

**SERIES:** PB5L | **DESCRIPTION:** PUSH BUTTON SWITCH**FEATURES**


- illuminated
- momentary and alternate
- IP67

**SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated voltage				12	Vdc
				24	Vdc
				250	Vac
rated current	12 Vdc			2.0	A
	24 Vdc			1.0	A
	250 Vac			2.0	A
withstanding voltage	for 1 minute		1,000		Vac
contact resistance				50	mΩ
insulation resistance	at 500 Vdc	100			MΩ
operating force		350	400	450	gf
actuator travel		2.0	2.5	3.0	mm
operating temperature		-20		85	°C
life	electrical		10,000		cycles
	mechanical		100,000		cycles
hand soldering	for 3±0.5 seconds	345	350	355	°C
flammability rating	see material table				
RoHS	yes				
IP level	IP67				

LED SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
forward voltage (Vf)	at If=20 mA				
	green	2.8	3.0	3.6	V
	red	1.8	2.0	2.4	V
	white	2.8	3.0	3.6	V

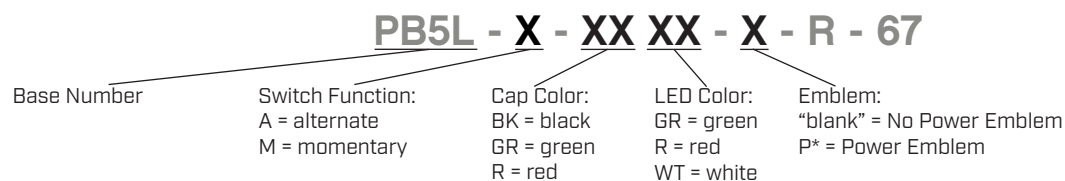PART NUMBER KEY







Note: *Power emblem versions only available with black caps, and with green or white LED.

MECHANICAL DRAWING (ALTERNATE, NO POWER EMBLEM)

units: mm
tolerance:
X≤5.0: ±0.2 mm
5.0<X<30.0: ±0.3 mm
X≥30.0: ±0.5 mm
unless otherwise noted
panel thickness: 4.0 mm max




DESCRIPTION	MATERIAL	PLATING/COLOR
base	PA (UL94V-2)	black
cap	ABS (UL94HB)	see part number key
terminals	copper	gold
nut	zinc alloy	nickel

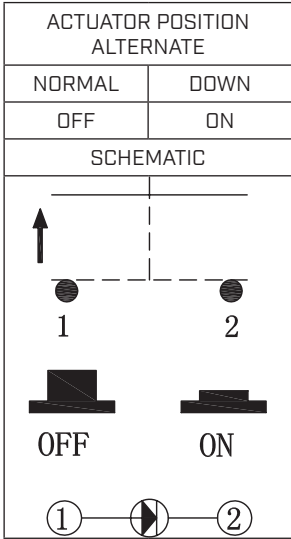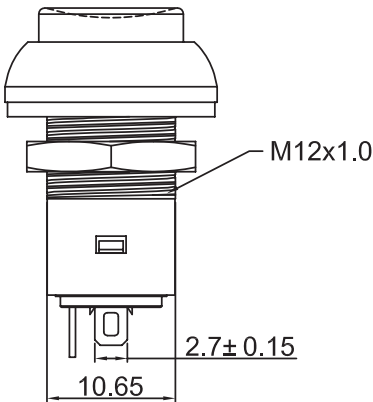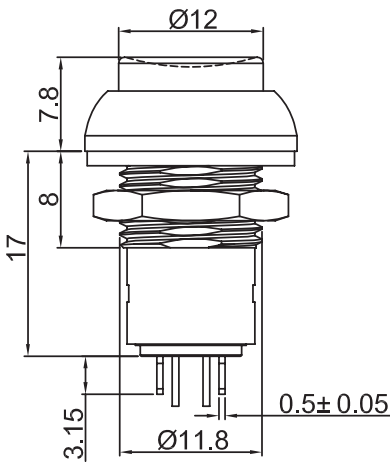







Recommended Panel Cutout

MECHANICAL DRAWING (ALTERNATE, POWER EMBLEM)

units: mm
tolerance:
X≤5.0: ±0.2 mm
5.0<X<30.0: ±0.3 mm
X≥30.0: ±0.5 mm
unless otherwise noted
panel thickness: 4.0 mm max




DESCRIPTION	MATERIAL	PLATING/COLOR
base	PA (UL94V-2)	black
cap	ABS (UL94HB)	see part number key
terminals	copper	gold
nut	zinc alloy	nickel

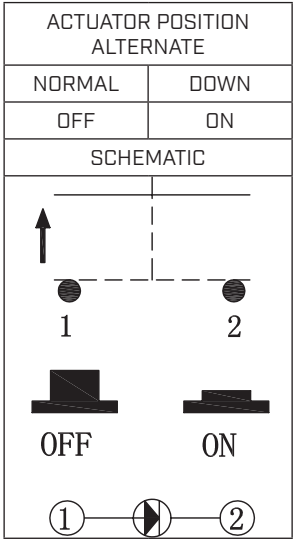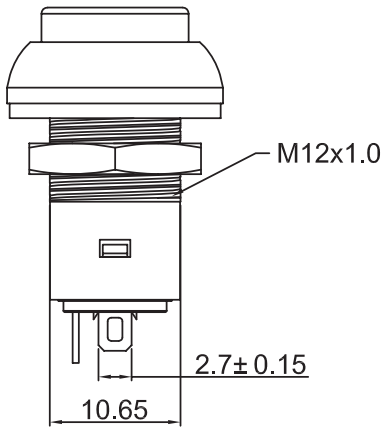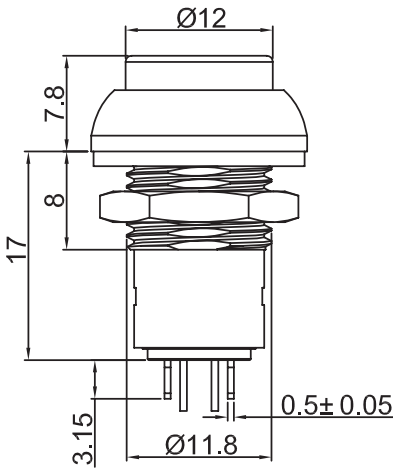







Recommended Panel Cutout

MECHANICAL DRAWING (MOMENTARY, NO POWER EMBLEM)

units: mm
tolerance:
X≤5.0: ±0.2 mm
5.0<X<30.0: ±0.3 mm
X≥30.0: ±0.5 mm
unless otherwise noted
panel thickness: 4.0 mm max




DESCRIPTION	MATERIAL	PLATING/COLOR
base	PA (UL94V-2)	black
cap	ABS (UL94HB)	see part number key
terminals	copper	gold
nut	zinc alloy	nickel

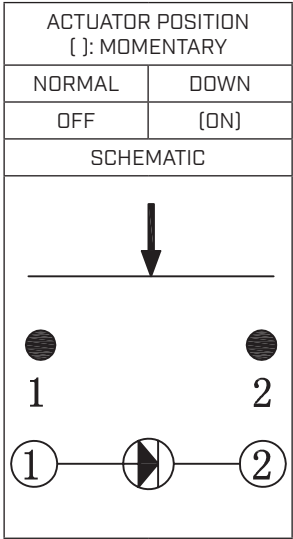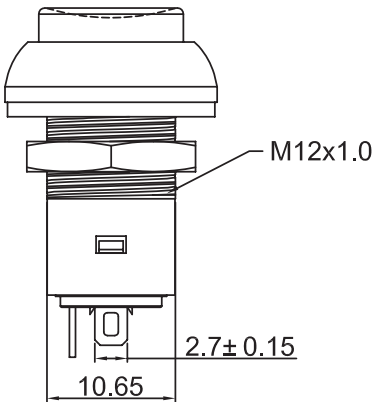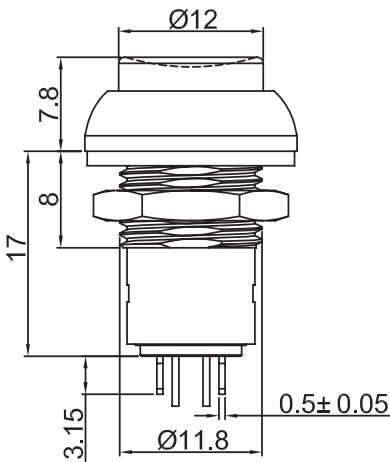







Recommended Panel Cutout

MECHANICAL DRAWING (MOMENTARY, POWER EMBLEM)

units: mm
tolerance:
X≤5.0: ±0.2 mm
5.0<X<30.0: ±0.3 mm
X≥30.0: ±0.5 mm
unless otherwise noted
panel thickness: 4.0 mm max



DESCRIPTION	MATERIAL	PLATING/COLOR
base	PA (UL94V-2)	black
cap	ABS (UL94HB)	see part number key
terminals	copper	gold
nut	zinc alloy	nickel

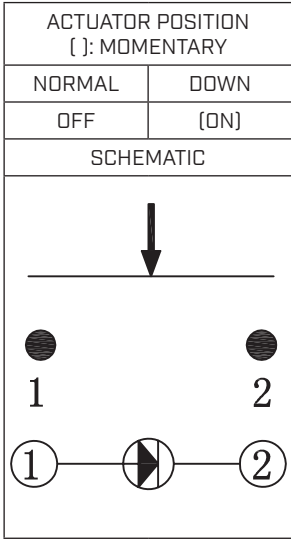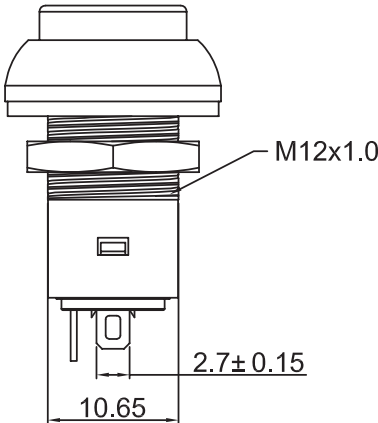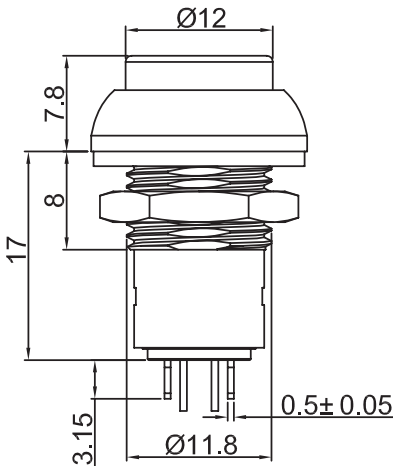

Recommended Panel Cutout

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pushbutton Switches](#) category:

Click to view products by [Same Sky](#) manufacturer:

Other Similar products are found below :

[8971K1133](#) [LW2L-M1C20M-A](#) [701PB580](#) [7199K101](#) [810KSV30B](#) [MML21KA3ABK](#) [8450K1](#) [861901](#) [861K11911T01A07](#)
[8646AB6X718UL](#) [99-453.837](#) [A3A-7340](#) [ABGW410-R](#) [1211390004](#) [ABN111-Y](#) [ABN400-R](#) [121382](#) [1211500044](#) [121194](#) [1223A2ULCSA](#)
[D5P-MT4](#) [13435AG](#) [13445AD29GX768](#) [AH165-2SGLG1TE3](#) [AH165-TGLR11AA3](#) [AH165-TLR11E](#) [AH165-TLW22E3](#) [AH16P-11](#)
[AH16P-2P3BX](#) [AH16P-TGFGX](#) [14101AF1513](#) [AL6H-M14-JW](#) [AL6H-M17-W](#) [ALFN22211DNG-U](#) [ALQW2BP](#) [1470AF2501](#) [AS480](#)
[1520150-1](#) [AV091003C240K](#) [160100-2506](#) [180659](#) [NE0006](#) [1PB544](#) [1PB587](#) [1PB618](#) [1PB73-T2](#) [IPC1SAD7/1L0S](#) [NX223002B-M](#)
[C7001AEBR](#) [ISR3Z1AD100](#)