


SERIES: PR21 | DESCRIPTION: POWER RELAY

FEATURES

- 5V/12V/24V
- DPST & DPDT
- 400 mW




MODEL

	coil voltage typ (Vdc)	coil resistance (Ω ±10%)	operating voltage min (Vdc)	release voltage max (Vdc)	coil power max (mW)
PR21-5V-400-2A	5	62.5	3.5	0.5	400
PR21-12V-400-2A	12	360	8.4	1.2	400
PR21-24V-400-2A	24	1,440	16.8	2.4	400
PR21-5V-400-2C	5	62.5	3.5	0.5	400
PR21-12V-400-2C	12	360	8.4	1.2	400
PR21-24V-400-2C	24	1,440	16.8	2.4	400

Notes: 1. All specifications are measured at 23°C unless otherwise specified.

PART NUMBER KEY

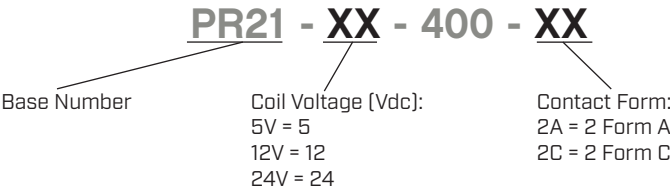

CONTACT SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
contact form	2 Form A, 2 Form C				
contact material	Ag alloy				
contact rating	8 A @ 250 Vac 8 A @ 30 Vdc				
contact resistance	at 6 Vdc, 1.0 A			100	mΩ
max switching voltage				440 120	Vac Vdc
max switching current				8	A
max switching power				2,000 240	VA W
min switching load	5 Vdc, 100 mA				
life	electrical mechanical		100,000 20,000,000		operations operations

GENERAL SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
insulation resistance	at 500 Vdc	1,000			MΩ
dielectric strength	between open contacts for 1 minute between coil and contacts for 1 minute		1,000 5,000		Vac Vac
operate time				10	ms
release time				5	ms
shock resistance	endurance misoperation		1,000 100		m/s ² m/s ²
vibration resistance	endurance: 10~55 Hz, 1.5 mm double amplitude misoperation: 10~55 Hz, 1.5 mm double amplitude				
operating temperature		-40		85	°C
humidity	at 40°C	35		95	%RH
weight			13.0		g
safety approvals	UL/cUL 508				
flammability rating	UL94V-0				
RoHS	yes				
packaging	tube: 25 pcs per tube carton size: 388 x 360 x 154 mm carton QTY: 1,000 pcs per carton				

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for 3.5±0.5 seconds	340	350	360	°C
wave soldering	for 10±1 seconds	255	260	265	°C



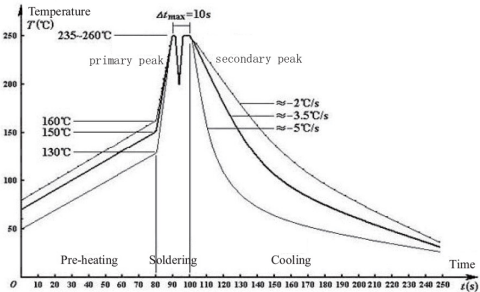


Double-wave Soldering Curve

MECHANICAL DRAWING (2A = 2 FORM A)

units: mm
tolerance: ± 0.3 mm
unless otherwise noted

ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
A	housing	PBT [UL94V-0]	black
B	terminals	copper covered steel	tin

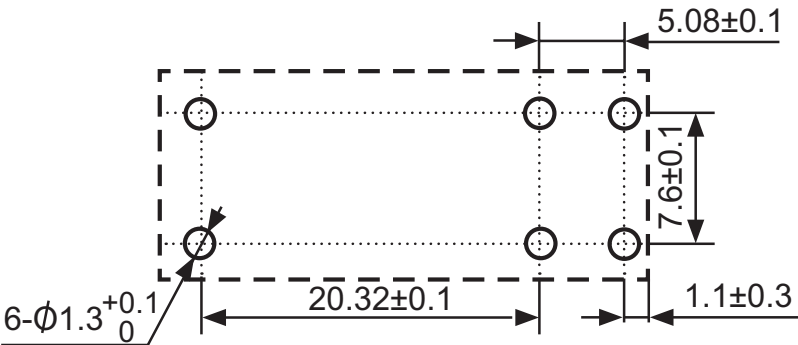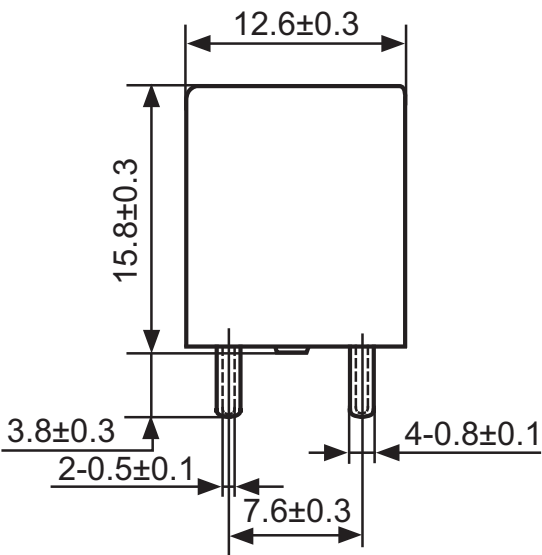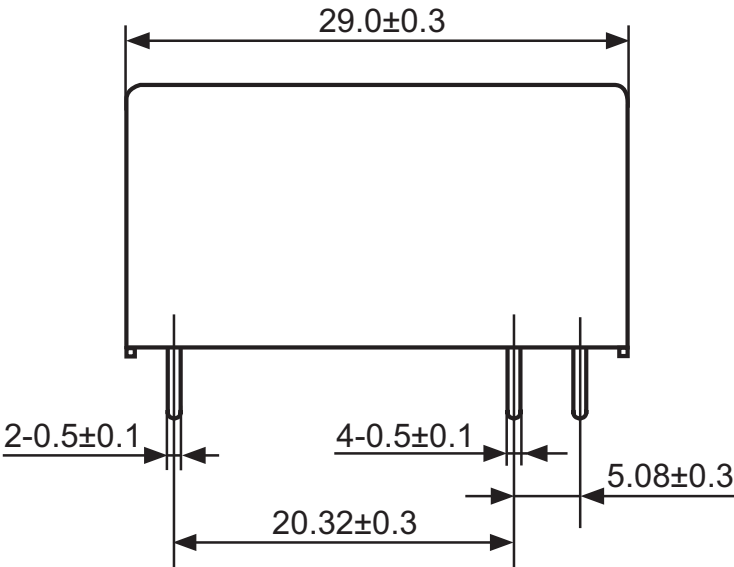

Recommended PCB Layout
Bottom View






Wiring Diagram
Bottom View


MECHANICAL DRAWING (2C = 2 FORM C)

units: mm
tolerance: ±0.3 mm
unless otherwise noted

ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
A	housing	PBT [UL94V-0]	black
B	terminals	copper covered steel	tin

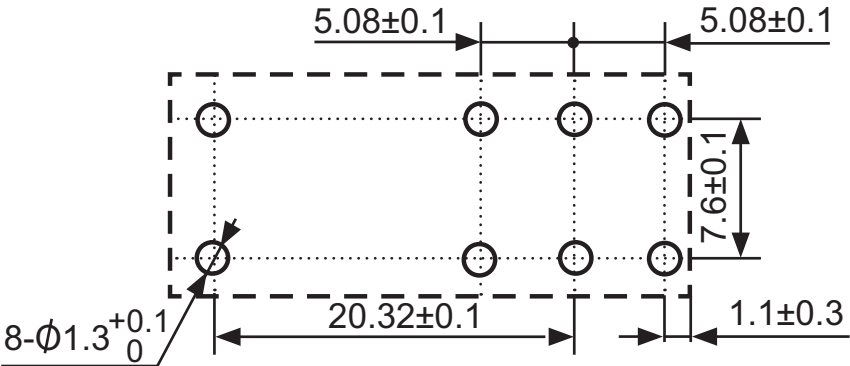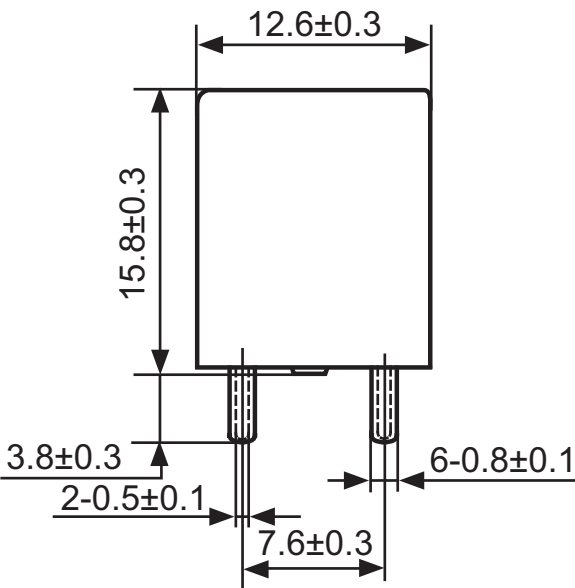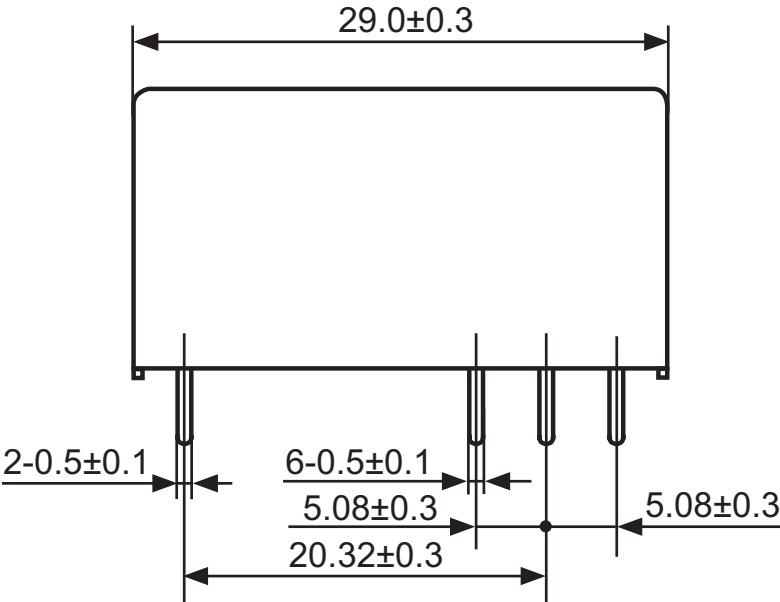


Recommended PCB Layout
Bottom View

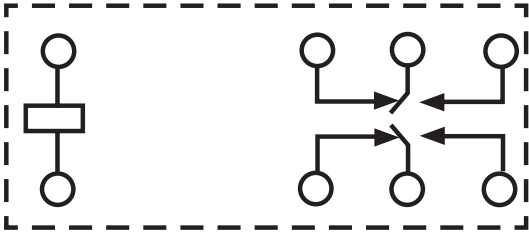


Wiring Diagram
Bottom View

CHARACTERISTIC CURVES


Maximum Switching Power

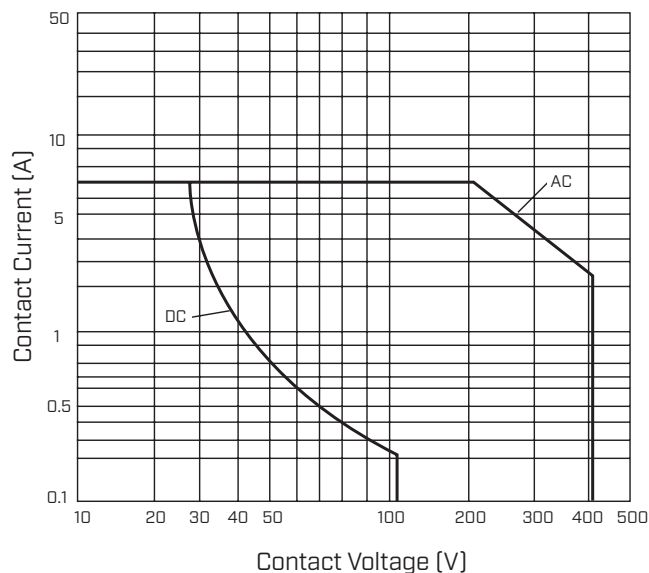

Life Curve

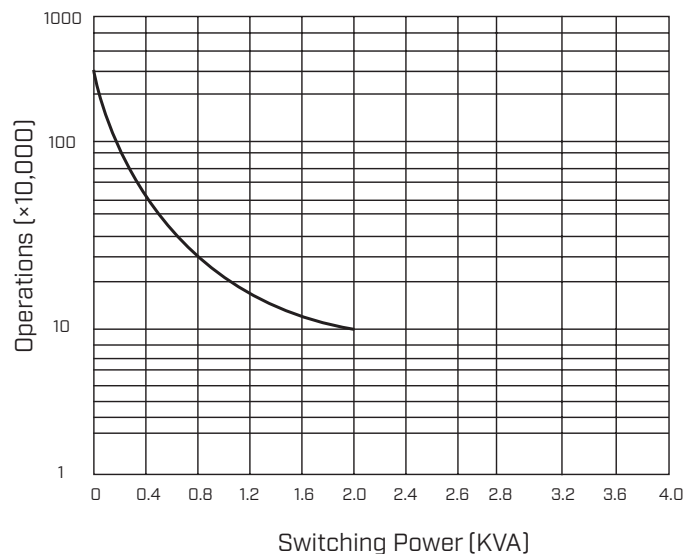

Max Ambient Temp. Vs. Coil Voltage

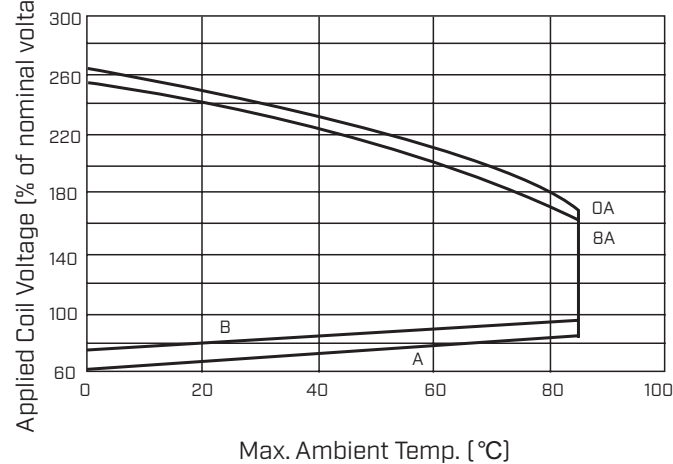

A: Coil Temperature = Ambient Temperature
B: 110% of nominal coil voltage at rated contact load

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) ***category:***

Click to view products by [Same Sky](#) ***manufacturer:***

Other Similar products are found below :

[PCN-105D3MH,000](#) [5JO-1000CD-SIL](#) [LY2N-AC120](#) [LY2-US-AC120](#) [603-12D](#) [603-345S](#) [61212T400](#) [61243C500](#) [61311C0A2](#)
[61311COA1](#) [61311F0A2](#) [61312Q600](#) [61312T600](#) [61322T400](#) [61332C400](#) [61343C600](#) [61343T200](#) [61343T400](#) [61343T600](#) [6-1393099-8](#) [6-1616931-6](#) [619-11B-200](#) [628-0306](#) [628-0313](#) [CX-4016](#) [7-1393144-5](#) [7-1617090-0](#) [7-1617583-6](#) [7312C-24A](#) [770050](#) [MDR-4075](#)
[788XBXM4L-110/120A](#) [78ARCSX-1](#) [78CSX-8](#) [7940034328](#) [FC-6-249B](#) [MK3EP-UA-AC240](#) [MK43B834-001](#) [8-1393110-1](#) [8-1393129-7](#)
[8-1617606-0](#) [ML-23D-5K](#) [832A-1C-24 VDC](#) [8511CS0-9D](#) [FW1062S06](#) [FW1062S10](#) [FW5A1120S02](#) [FW5A1201S07](#) [910523](#) [9-1393099-5](#)