

**SERIES:** SSK01-MPH-254 | **DESCRIPTION:** RECTANGULAR CONNECTOR**FEATURES**

- male pin header
- 2.54 mm pitch
- straight pins
- single row
- gold flash

**SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated voltage				250	V
rated current				3	A
dielectric withstanding voltage	at 2 mA cut-off current for 1 minute		500		Vac
contact resistance	measured at 1 kHz AC, 100 mA			20	mΩ
insulation resistance	at 1,000 Vdc for 1 minute	1,000			MΩ
retention force	per pin	0.7			kgf
insertion force	per pin			0.3	kgf
withdrawal force	per pin	0.05			kgf
life			100		cycles
operating temperature		-40		105	°C
flammability rating	UL94V-0				
RoHS	yes				

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
wave soldering	for 3±0.5 seconds	240	245	250	°C

PART NUMBER KEY**SSK01 - MPH - 254 - A XX**

Base Number


No. of Poles:

1	11	21	31
2	12	22	32
3	13	23	33
4	14	24	34
5	15	25	35
6	16	26	36
7	17	27	37
8	18	28	38
9	19	29	39
10	20	30	40

MECHANICAL DRAWING

units: mm
tolerance:
X.X ±0.30 mm
X.XX ±0.20 mm
X.XXX ±0.15 mm
unless otherwise noted

DESCRIPTION	MATERIAL	PLATING/COLOR
housing	PA6T [UL94V-0]	black
contacts	brass	0.2 μ" min gold flash over nickel

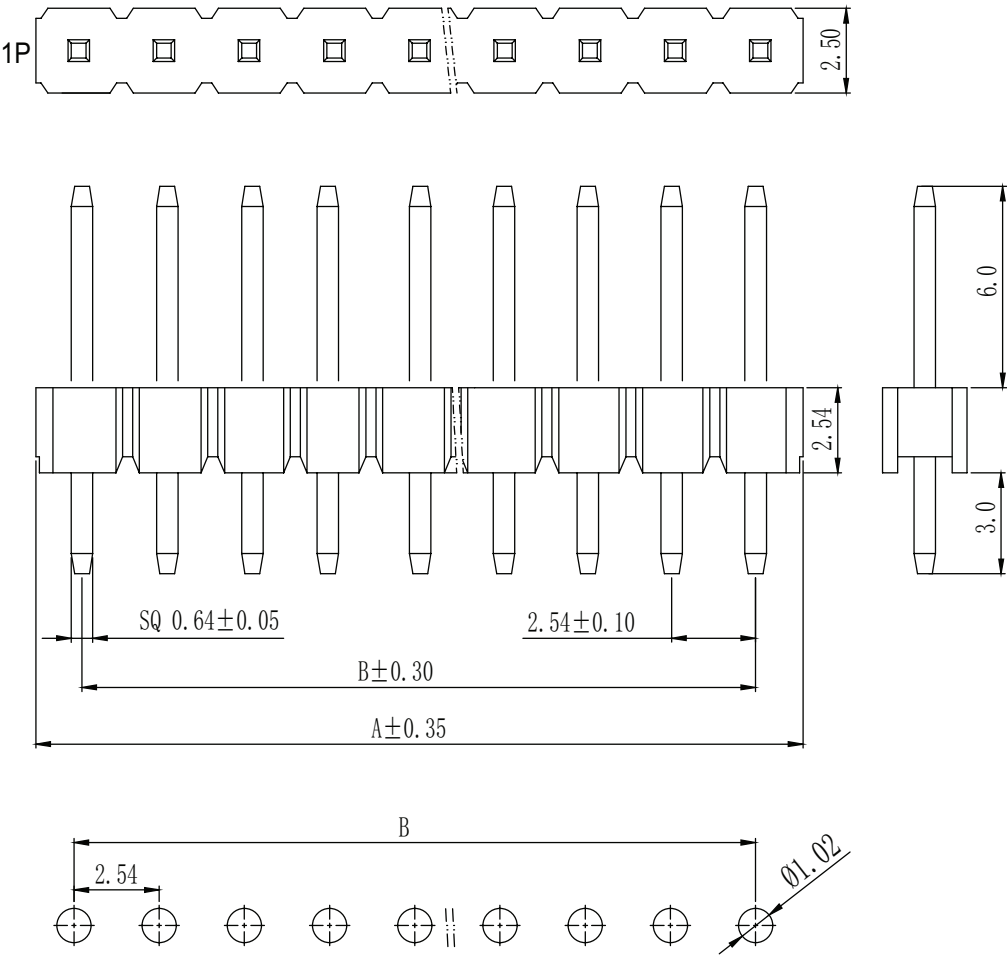

Recommended PCB Layout
Top View

This series is constructed of single piece modules where A & B are length dimensions and N is the number of poles.												
N	01	02	03	04	05	06	07	08	09	10	11	12
A	2.24	4.78	7.32	9.86	12.40	14.94	17.48	20.02	22.56	25.10	27.64	30.18
B	-	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	25.40	27.94
N	13	14	15	16	17	18	19	20	21	22	23	24
A	32.72	35.26	37.80	40.34	42.88	45.42	47.96	50.50	53.04	55.58	58.12	60.66
B	30.48	33.02	35.56	38.10	40.64	43.18	45.72	48.26	50.80	53.34	55.88	58.42
N	25	26	27	28	29	30	31	32	33	34	35	36
A	63.20	65.74	68.28	70.82	73.36	75.90	78.44	80.98	83.52	86.06	88.60	91.14
B	60.96	63.50	66.04	68.58	71.12	73.66	76.20	78.74	81.28	83.82	86.36	88.90
N	37	38	39	40								
A	93.68	96.22	98.76	101.30								
B	91.44	93.98	96.52	99.06								

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Same Sky](#) ***manufacturer:***

Other Similar products are found below :

[0010894062](#) [0010977306](#) [0015477636](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [636-1030](#) [641938-9](#) [65692-001LF](#) [65781-018](#) [65817-010LF](#) [65817-015LF](#) [68645-018](#) [699319-000](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [MMS10801TSV](#) [850-10-006-10-001000](#) [852-10-016-10-001000](#) [852-10-026-10-001000](#) [856-10-002-40-001000](#) [PH2-08-SGA](#) [90309-118LF](#) [90309-912LF](#) [93111-517LF](#) [94277-110LF](#) [98031-0001](#) [98416-S06B16ULF](#) [99.234.9999](#) [99.234.9999.6](#) [99.238.9999.6](#) [99.242.9999.6](#) [1-2169662-0](#) [1-2169663-0](#) [1-22284-0](#) [DAMM3W3PA183](#) [134-10-308-00-020000](#) [1347260000](#)