


(2,54 mm) .100"

ESQ-110-44-T-D



ESW-115-12-G-S



ESQ-132-14-G-D

ESW, ESQ SERIES

ELEVATED SOCKET

Mates with:
TSW, MTSW, EW,
MTLW, TSS, ZSS, TSM,
DW, ZW, HW, TSSH, HTSS

SPECIFICATIONS

For complete specifications see www.samtec.com?ESW or www.samtec.com?ESQ

Insulator Material: Black Glass Filled Polyester
Contact Material: Phosphor Bronze
Plating: Au or Sn over 50µ" (1,27 µm) Ni

Current Rating (ESW/TSW): 5.2 A per pin (1 pin powered per row)

Current Rating (ESQ/TSW): 5.7 A per pin (1 pin powered per row)

Voltage Rating: 550 VAC mated with TSW or ESQ

Operating Temp Range: -55°C to +125°C with Gold -55°C to +105°C with Tin

Contact Resistance: 10 mΩ

Insertion Depth: (3,68 mm) .145" to (6,35 mm) .250"

Insertion Force: (Single contact only) Standard = 6 oz (1,67 N) avg. ((0,64 mm) .025" SQ pin); ESW Low Insertion Force= 3 oz (0,83 N) avg. ESQ Low Insertion Force= 3.3 oz (0,92 N) avg.

Normal Force: Standard = 125 grams (4,4 N)

Withdrawal Force: (Single contact only) Standard = 5 oz (1,39 N) avg. ((0,64 mm) .025" SQ pin); ESW Low Insertion Force= 2.6 oz (0,72 N) avg. ESQ Low Insertion Force= 2.9 oz (0,81 N) avg.

Max Cycles: 100 with 10µ" (0,25 µm) Au
RoHS Compliant: Yes

Lead-Free Solderable: Wave only

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



Note: Some lengths, styles and options are non-standard, non-returnable.


TYPE STRIP	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	OTHER OPTION
ESW = Solder Tail ESQ = Square Tail				-L = 10µ" (0,25 µm) Gold contact, Matte Tin on tail -G = 20µ" (0,51 µm) Gold contact, Gold Flash on Balance -T = Matte Tin (N/A w/LIF contact)	-S = Single Row -D = Double Row -T = Triple Row (ESQ only)	-LL = Locking Lead Two leads per strip crimped. N/A with single row 1 or 2 positions. "XXX" = Polarized

ALSO AVAILABLE (MOQ Required)

- Other platings
- Contact Samtec.




01 thru 36

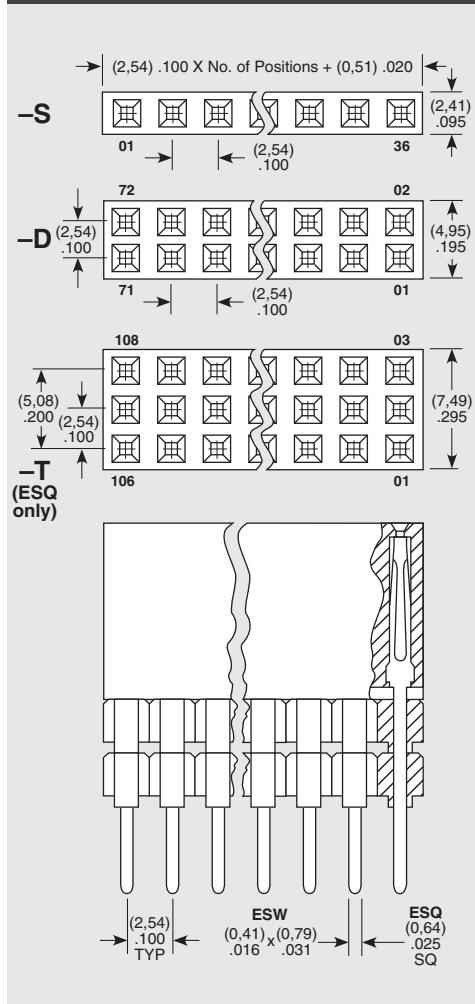


Specify LEAD STYLE from chart below.

STANDARD INSERTION FORCE	LOW INSERTION FORCE	A	B
- 12	- 37	(2,29) .090	(11,05) .435
- 13	- 38	(7,36) .290	
- 23	- 48	(4,83) .190	(13,59) .535
- 33	- 58	(2,29) .090	(16,13) .635
- 14	- 39	(12,19) .480	(11,05) .435
- 24	- 49	(9,65) .380	(13,59) .535
- 34	- 59	(7,11) .280	(16,13) .635
- 44	- 69	(4,57) .180	(18,67) .735



APPLICATIONS



PC/104™ J1/P1 "Stackthrough" Connectors	
Standard Insertion Force	ESQ-132-14-G-D
Low Insertion Force	ESQ-132-39-G-D
PC/104™ J1 "Non-Stackthrough" Connectors	
Standard Insertion Force	ESQ-132-12-G-D
Low Insertion Force	ESQ-132-37-G-D
PC/104™ J2/P2 "Stackthrough" Connectors	
Standard Insertion Force	ESQ-120-14-G-D
Low Insertion Force	ESQ-120-39-G-D

PC/104 is a trademark of the PC/104 Consortium.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [79531-3000](#) [FCN-](#)
[360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[801-93-011-10-001000](#)