


# MODIFIED .025" SQ POST HEADERS

(2.54 mm) .100" PITCH • MTSW/HMTSW SERIES

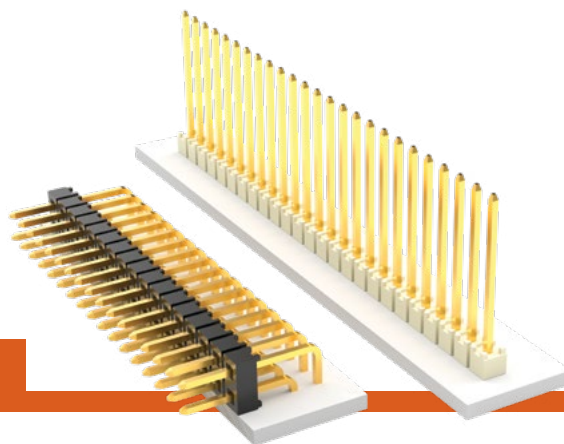

## MTSW/HMTSW

### Board Mates:

SSW, SSQ, ESW,  
ESQ, BCS, BSW  
CES, SLW, HLE, SSM

### Cable Mates:

IDSD, IDSS

## SPECIFICATIONS

### Insulator Material:

MTSW: Black Glass  
Filled Polyester  
HMTSW: Natural Liquid  
Crystal Polymer

### Terminal Material:

Phosphor Bronze

### Plating:

Au or Sn over  
50  $\mu$ " (1.27  $\mu$ m) Ni

### Operating Temp Range:

-55 °C to +125 °C with Gold  
-55 °C to +105 °C with Tin

## PROCESSING

### Lead-Free Solderable:

MTSW: No, Lead Wave Only  
HMTSW: Yes

## SERIES

**MTSW**  
= Modified Strip

**HMTSW**  
= Hi-Temp  
Modified Strip

## PIN CENTERS

**-1**  
= (2.54 mm) .100" Pitch  
(All positions filled)

**-2**  
= (5.08 mm) .200" Pitch  
(Every other position filled)

## NO. PINS PER ROW










**01 thru 50**  
= .100" (2.54 mm)  
Center Version

**02 thru 25**  
= .200" (5.08 mm)  
Center Version

## LEAD STYLE

Specify  
**LEAD STYLE**  
from chart

| LEAD STYLE | OAL           |
|------------|---------------|
| -06        | (7.62) .300   |
| -07        | (10.92) .430  |
| -08        | (13.46) .530  |
| -09        | (18.54) .730  |
| -10        | (21.08) .830  |
| -11        | (23.62) .930  |
| -12        | (26.16) 1.030 |
| -13        | (31.24) 1.230 |
| -21        | (36.32) 1.430 |
| -22        | (16.00) .630  |
| -23        | (11.30) .445  |
| -24        | (12.19) .480  |
| -27        | (33.78) 1.330 |
| -28        | (28.70) 1.130 |



MTSW


HMTSW

Straight Pin Versions: A=OAL-C- (2.54) .100"

| FOR "A" = (2.29) .090 |               |                          |
|-----------------------|---------------|--------------------------|
| LEAD STYLE            | OAL           | C<br>MAXIMUM<br>STRAIGHT |
| -06                   | (7.62) .300   | (2.79) .110              |
| -07                   | (10.92) .430  | (6.10) .240              |
| -08                   | (13.46) .530  | (8.64) .340              |
| -09                   | (18.54) .730  | (13.72) .540             |
| -10                   | (21.08) .830  | (16.26) .640             |
| -11                   | (23.62) .930  | (18.80) .740             |
| -12                   | (26.16) 1.030 | (21.34) .840             |
| -13                   | (31.24) 1.230 | (26.42) 1.040            |
| -21                   | (36.32) 1.430 | (31.50) 1.240            |
| -22                   | (16.00) .630  | (11.18) .440             |
| -23                   | (11.30) .445  | (6.48) .255              |
| -24                   | (12.19) .480  | (7.37) .290              |
| -27                   | (33.78) 1.330 | (28.96) 1.140            |
| -28                   | (28.70) 1.130 | (23.88) .940             |

### Note:

These Series are  
non-standard, non-returnable.

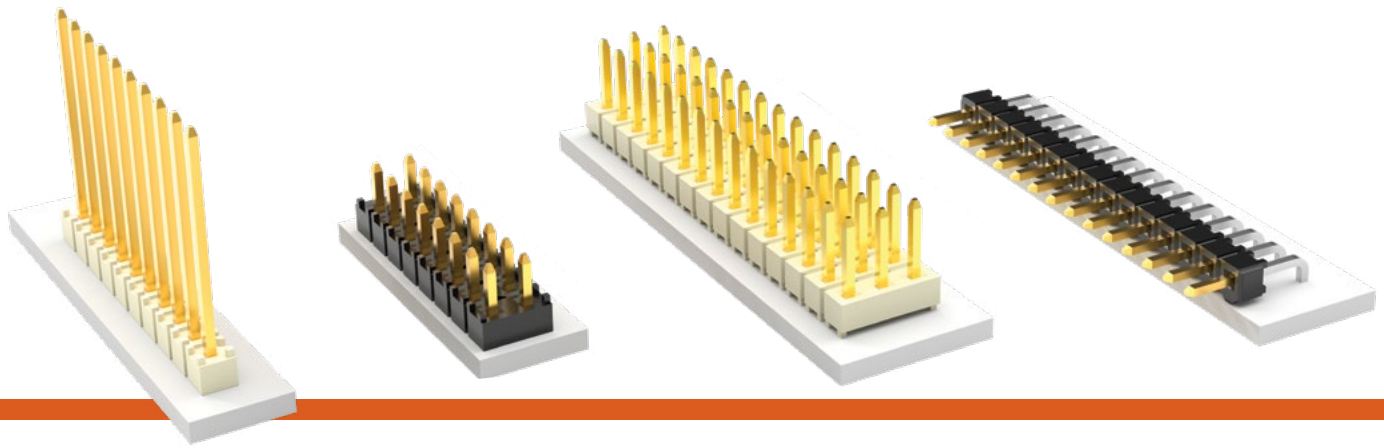

## PLATING OPTION

**-F**  
= Gold flash on post,  
Matte Tin on tail

**-L**  
= 10  $\mu$ " (0.25  $\mu$ m)  
Gold on post,  
Matte Tin on tail

**-G**  
= 10  $\mu$ " (0.25  $\mu$ m)  
Gold on post,  
Gold flash on balance

**-T**  
= Matte Tin

## ROW OPTION

**-S**  
= Single Row

**-D**  
= Double Row

**-T**  
= Triple Row

**-Q**  
= Double Row  
.200" (5.08 mm)  
row space

## POST HEIGHT

**"XXXX"**  
= "C" Dimension  
(Specify post height in  
INCHES  
.005" (0.13 mm) increments)

## OTHER OPTION









**-RA or -RE**  
= Right-angle  
(HMTSW -S & -D =  
36 positions maximum)

**-LL**  
= Locking Lead  
(not available with -RE, not available  
in single row 1 or 2 positions)  
(Available on tails from .229 mm .090"  
to (10.16 mm) .400" only)

**-LA**  
= -RA option with -LL Option  
(Maximum "C" = (13.46 mm) .530")

## POLARIZED OPTION

**"XXX"**  
= Polarized  
(Specify 'XXX' as position number)

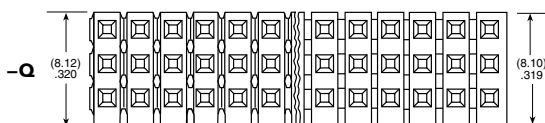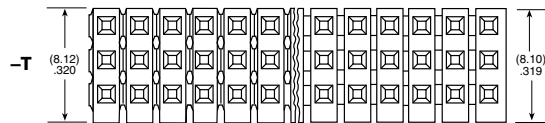

MTSW

HMTSW

| -RX<br>OPTION | D           |
|---------------|-------------|
| -RA           | (1.52) .060 |
| -RE           | (4.06) .160 |

| FOR "E" = (2.29) .090 MIN FOR -RA & -RE |               |                          |                          |
|-----------------------------------------|---------------|--------------------------|--------------------------|
| LEAD<br>STYLE                           | OAL           | C<br>MAXIMUM<br>with/-RA | C<br>MAXIMUM<br>with/-RE |
| -06                                     | (7.62) .300   | Not Available            | Not Available            |
| -07                                     | (10.92) .430  | (3.30) .130              | Not Available            |
| -08                                     | (13.46) .530  | (5.84) .230              | (3.30) .130              |
| -09                                     | (18.54) .730  | (10.92) .430             | (8.38) .330              |
| -10                                     | (21.08) .830  | (13.46) .530             | (10.92) .430             |
| -11                                     | (23.62) .930  | (16.00) .630             | (13.46) .530             |
| -12                                     | (26.16) 1.030 | (18.54) .730             | (16.00) .630             |
| *-13                                    | (31.24) 1.230 | (23.62) .930             | (21.08) .830             |
| *-21                                    | (36.32) 1.430 | (28.70) 1.130            | (26.16) 1.030            |
| -22                                     | (16.00) .630  | (8.38) .330              | (5.84) .230              |
| *-23                                    | (11.30) .445  | (3.68) .145              | Not Available            |
| *-24                                    | (12.19) .480  | (4.57) .180              |                          |
| *-27                                    | (23.78) 1.330 | (26.16) 1.030            | (23.62) .930             |
| *-28                                    | (28.70) 1.130 | (21.08) .830             | (18.54) .730             |

\* Styles -21, -23, -24, -27 not available with -D Right-angle  
Styles -13, -21, -23, -24, -27, -28 not available with -T or -Q Right-angle

**Right-Angle Versions (-RA Options):** E=OAL-C- (5.33) .210"

**Right-Angle Versions (-RE Options) Single Row Only:** E=OAL-C- (7.87) .310"

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for*** [Board to Board & Mezzanine Connectors](#) ***category:***

***Click to view products by*** [Samtec](#) ***manufacturer:***

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68682-310LF](#) [68684-306](#) [75140-7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#)