





**MMCX7 SERIES** 

# **75** $\Omega$ MICRO-MINI SYSTEMS

#### **SPECIFICATIONS**

For complete specifications and recommended PCB layouts see www.samtec.com?MMCX7-TH

Shell Material:

Brass Insulator Material:

PTFE Contact Material:

Pin Material:

Brass

Operating Temp Range: -65 °C to +125 °C Impedance:

**Dielectric Withstanding** 

Voltage: 500 Vrms, 50 Hz

Dielectric Working Voltage: 170 Vrms, 50 Hz

Frequency Range: 0~6 GHz

RoHS Compliant:


## **PROCESSING**


Lead-Free Solderable:

### **OTHER SOLUTIONS**

• 75  $\Omega$  Cable Components available

Contact Samtec.

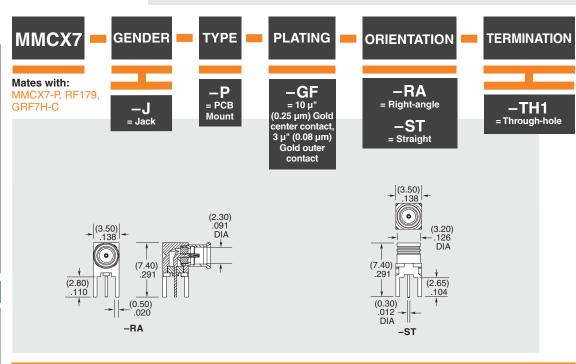

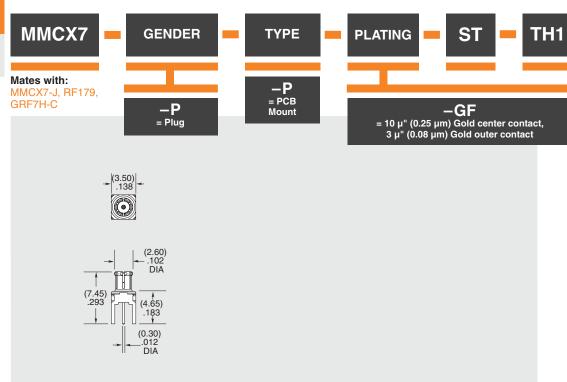

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Connectors / Coaxial Connectors category:

Click to view products by Samtec manufacturer:

Other Similar products are found below:

8915-1511-000 89674-0827 6001-7071-019 6002-7051-003 6002-7551-202 6059674-1 619550-1 630059-000 M39030/3-01N 6500-7071-046 6769 CX050L2AQ 7002-1541-010 7002-1542-011 7004-1512-000 7009-1511-004 7010-1511-000 7029-1511-060 7101-1541-010 7101-1571-002 7145-1521-002 7203-1571-003 7209-1511-011 7210-1511-015 7210-1511-019 73137-5015 73216-2241 73404-2300 7405-1521-005 7405-1521-802 8527 8547 FS11V 877931 8808-1511-001 9074-9513-000 9101-9573-002 910A205F 9130-9573-002 PL11SC-026 PL375-33 PL40-5 PL74C-221 PL75MC-217 PL803-7 1200690078 1-201144-1 R107003010W R110A172100 R112186000