


TIGER CLAW™ SOCKET STRIP

(2.00 mm) .0787" PITCH • MMS SERIES

8
Gbps

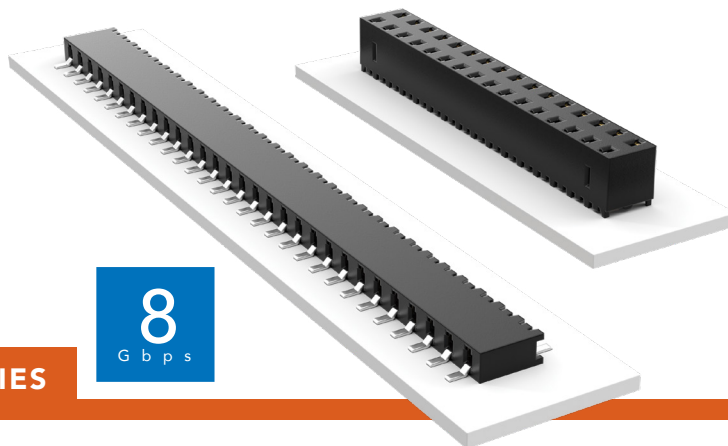

MMS

Board Mates:

TMMH, TMM, MTMM, MMT,
TW, LTMM, ZLTMM, TSH

Cable Mates:

TCMD

SPECIFICATIONS

Insulator Material:

Black LCP

Contact Material:

Phosphor Bronze

Plating:

Sn or Au over
50 μ" (1.27 μm) Ni

Operating Temp Range:

-55 °C to +125 °C with Gold

-55 °C to +105 °C with Tin

Current Rating (MMS/TMM):

3.9 A per pin

(2 pins powered)

Voltage Rating:

350 VAC/495 VDC

Insertion Depth:

DH = (2.13 mm) .084" to

(2.79 mm) .110"

SH = (2.13 mm) .084"

minimum or pass-through

Top Entry DV/SV =

(2.13 mm) .084" to

(4.32 mm) .170"




Bottom Entry DV/SV =

(4.27 mm) .168" minimum

(Plus board)

MMS	- 1	NO. PINS PER ROW	- 01	PLATING OPTION	- ROW OPTION	OPTION
-----	-----	------------------	------	----------------	--------------	--------

02 thru 40



-F
= Gold flash on contact,
Matte Tin on tail

-L
= 10 μ" (0.25 μm)
Gold contact,
Matte Tin on tail





-SV
= Single
Vertical

-SH
= Single
Horizontal

-DV
= Double
Vertical

-DH
= Double
Horizontal

-XX
= Polarized
Position



PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0.15 mm) .006" max*




*(.004" stencil solution

may be available; contact

ipg@samtec.com)

MMS	- 1	NO. PINS PER ROW	- 02	PLATING OPTION	- ROW OPTION	OTHER OPTION
-----	-----	------------------	------	----------------	--------------	--------------

02 thru 40

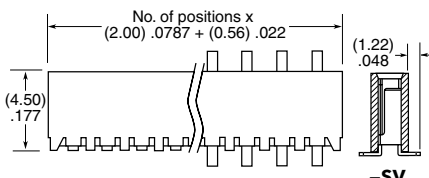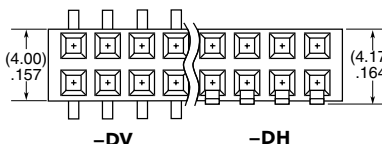

-F
= Gold flash
on contact,
Matte Tin on tail

-L
= 10 μ" (0.25 μm)
Gold contact,
Matte Tin on tail

-SV
= Single
Vertical

-SH
= Single
Horizontal

-DV
= Double
Vertical

-DH
= Double
Horizontal

-XX
= Polarized Position






-K
= (5.50 mm) .217" DIA
Polyimide Film
Pick & Place Pad
(3 positions min.)
(-SV & -DV only)

-M
= Metal Pick & Place Pad
(4 positions min.)
(-DV only)

-P
= Plastic Pick & Place Pad
(4 positions min.)
(-SV & -DV only)

-TR
= Tape & Reel

-FR
= Full Reel
Tape & Reel
(must order max.
quantity per reel;
contact Samtec for
quantity breaks)



ALSO AVAILABLE

Contact Samtec

Alignment Pin (-DV only)

Locking clips and Through-hole
pass-through options

Other platings

Note:

Some lengths, styles and
options are non-standard,
non-returnable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Samtec](#) ***manufacturer:***

Other Similar products are found below :

[0010894062](#) [0010977306](#) [0015477636](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [636-1030](#) [641938-9](#) [65692-001LF](#) [65781-018](#) [65817-010LF](#) [65817-015LF](#) [68645-018](#) [699319-000](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [MMS10801TSV](#) [850-10-006-10-001000](#) [852-10-016-10-001000](#) [852-10-026-10-001000](#) [856-10-002-40-001000](#) [PH2-08-SGA](#) [90309-118LF](#) [90309-912LF](#) [93111-517LF](#) [94277-110LF](#) [98031-0001](#) [98416-S06B16ULF](#) [99.234.9999](#) [99.234.9999.6](#) [99.238.9999.6](#) [99.242.9999.6](#) [1-2169662-0](#) [1-2169663-0](#) [1-22284-0](#) [DAMM3W3PA183](#) [134-10-308-00-020000](#) [1347260000](#)