

Product data sheet

Specifications



Inductive proximity sensors XS, inductive sensor XS6 M30, L64mm, brass, Sn30mm, 12...48 VDC, cable 2 m

XS630B5PAL2

Main

Range of product	Telemecanique Inductive proximity sensors XS
Series name	General purpose
Sensor type	Inductive proximity sensor
Device application	Mobile equipment
Sensor name	XS6
Sensor design	Cylindrical M30
Size	64 mm
Body type	Fixed
Detector flush mounting acceptance	Non flush mountable
Material	Metal
Type of output signal	Discrete
Wiring technique	3-wire
[Sn] nominal sensing distance	30 mm
Discrete output function	1 NO
Output circuit type	DC
Discrete output type	PNP
Electrical connection	Cable
Cable length	2 m
[Us] rated supply voltage	12...48 V DC with reverse polarity protection
Switching capacity in mA	<= 200 mA DC with overload and short-circuit protection
IP degree of protection	IP65 conforming to IEC 60529 IP67 conforming to DIN 40050 IP69K

Complementary

Thread type	M30 x 1.5
Detection face	Frontal
Front material	PPS
Enclosure material	Nickel plated brass

Sensing range	> 15...40 mm
Operating zone	0...24 mm
Differential travel	1...15% of Sr
Cable composition	3 x 0.34 mm²
Wire insulation material	PvR
Status LED	Output state: 1 LED (yellow)
Supply voltage limits	10...58 V DC
Switching frequency	<= 500 Hz DC
Maximum voltage drop	<2 V (closed)
Current consumption	<= 10 mA no-load
Maximum delay first up	15 ms
Maximum delay response	0.6 ms
Maximum delay recovery	1.4 ms
Marking	CE
Threaded length	39 mm
Length	64 mm
Net weight	0.205 kg

Environment

Product certifications	CSA UL E2
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...85 °C
Vibration resistance	25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
Shock resistance	50 gn for 11 ms conforming to IEC 60068-2-27

Packing Units

Unit Type of Package 1	Db
Number of Units in Package 1	1
Package 1 Height	4 cm
Package 1 Width	9.6 cm
Package 1 Length	13 cm
Package 1 Weight	198 g
Unit Type of Package 2	S01
Number of Units in Package 2	11
Package 2 Height	15 cm
Package 2 Width	15 cm
Package 2 Length	40 cm
Package 2 Weight	2.356 kg


Offer Sustainability

Sustainable offer status	Green Premium product
--------------------------	-----------------------

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions

Pre-cabled

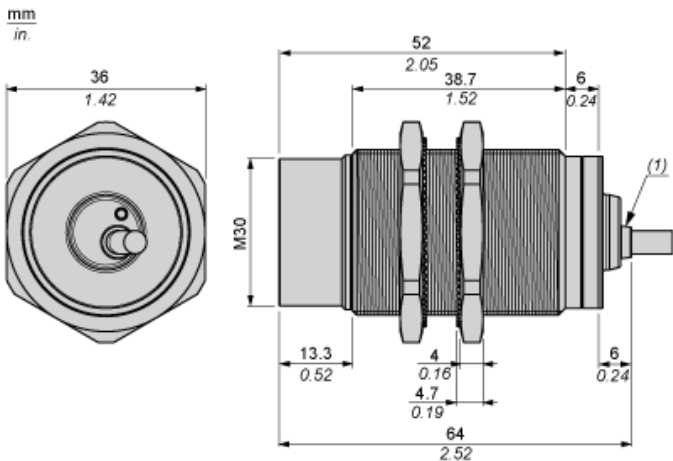


(1) Yellow LED (Output state indication)


Mounting and Clearance

Minimum Mounting Distances


Side by Side

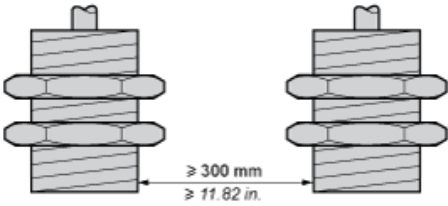


Face to Face

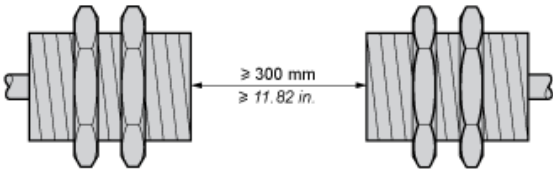

Facing a Metal Object

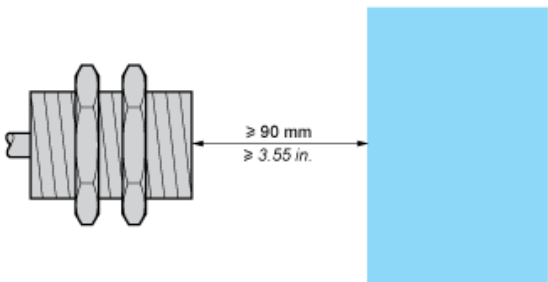


Mounted in a Metal Support

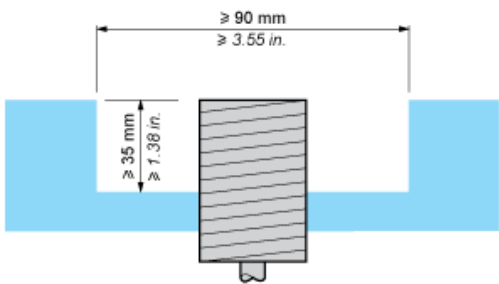

Connection and Schema

Wiring Schemes


PNP 3-wire



- BN : Brown
- BK : Black
- BU : Blue

Performance Curves

Standard Steel Target: 45 x 45 x 1 mm
Operating zone: 0...24 mm

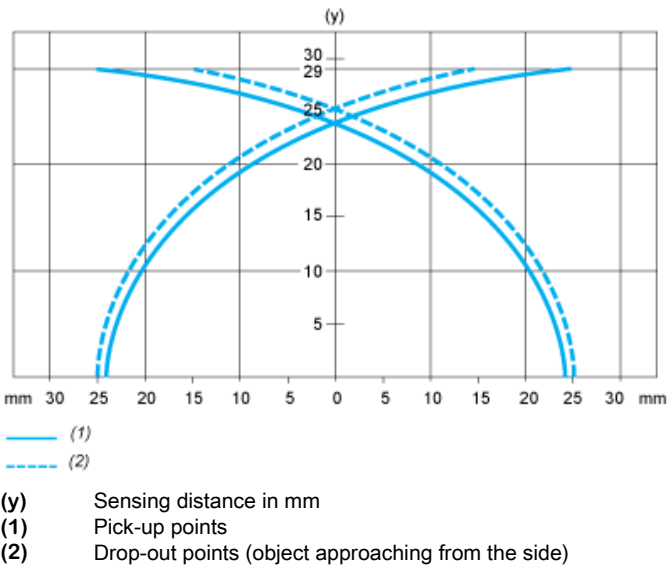

Recommended replacement(s)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Proximity Sensors](#) *category:*

Click to view products by [Schneider](#) *manufacturer:*

Other Similar products are found below :

[8027AL20NL2CPXX](#) [922AA2W-A9P-L](#) [GL-12F-C2.5X10\(LOT3\)](#) [972AB3XM-A3P-L](#) [980659-1](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2E-X4MD1-G](#) [E2E-X5E1-5M-N](#) [EI3010TBOP](#) [MS605AU](#) [EP175-32000](#) [IFRM06P1703/S35L](#) [ILFK12E9189/I02](#) [ILFK12E9193/I02](#) [922AA2XM-B9P-L](#) [922FS0.8-H4P-G-020](#) [SC606ABV0S30](#) [SM552A100](#) [SM851A1200FP](#) [F3S-A162-U](#) [QT-08L](#) [RDS-DIN3-PA-D1](#) [TL-X10F1-G](#) [TL-X5Y1-52](#) [IA12ASF04DOM1](#) [IFFK12P1501/L](#) [IFRM08N1503/S35L](#) [IFRM08N1701/S35L](#) [Y92E-P1D2H5](#) [DR10GTI](#) [DSM2C550](#) [ZS-2065](#) [E2E-X3D1-G](#) [E2QN15E3](#) [EI0801PPOS](#) [TL-X10MF2](#) [SGA8072](#) [SM552A173](#) [E2KC25MY1812M](#) [AIK18F05AN024-2M](#) [SM952A123000](#) [SM850A2400FP](#) [SM956A410002](#) [EI8040NACP](#) [SM801A1200](#) [AC441A](#) [AC441AUS](#) [DCB1C425](#) [DCB3N250](#)