



Monolithic tower lights, Harmony XVG, 60mm, red orange green blue, steady light, buzzer, aluminium tube mounting, IP23, 24V AC/DC

XVGB4ST

#### Main

Range of product	Harmony XVG
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	4 illuminated units
Material	PC (UL94 V-2): globe ABS (UL94HB): tube body Aluminium: tube
Mounting diameter	60 mm
Component name	XVG
Device mounting	Direct tube mounting
Light source	LED steady red LED steady green LED steady amber LED steady blue
Light block color	Red/orange/green/blue
Indicator bank base type	Base with integrated buzzer

### Complementary

Rated supply voltage	24 V AC/DC
Cable cross section	0.33 mm²
Discrete output type	PNP and NPN
[Uimp] rated impulse withstand voltage	0.5 kV
Current consumption	207 mA
Noise level	85 dB
Power consumption in W	4.8 W
Fundamental frequency	2.64 kHz
Net weight	0.44 kg

### **Environment**

Product certifications	CE EAC
Ambient air temperature for storage	-3570 °C

Ambient air temperature for operation	-1050 °C
IP degree of protection	IP23
Packing Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.8 cm
Package 1 Width	13.0 cm
Package 1 Length	8.5 cm
Package 1 Weight	548.0 g
Unit Type of Package 2	S04
Number of Units in Package 2	8
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	6.01 kg
Unit Type of Package 3	P06
Number of Units in Package 3	30
Package 3 Height	72 cm
Package 3 Width	60 cm
Package 3 Length	80 cm
Package 3 Weight	32 kg
Offer Sustainability	
Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

18 months

Warranty


**Contractual warranty** 

# **Product data sheet**

# XVGB4ST

Dimensions Drawings

## **Dimensions**

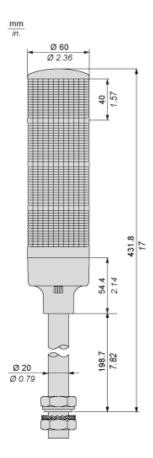


# **Product data sheet**

# XVGB4ST

Mounting and Clearance

## Mounting




## **Product data sheet**

## XVGB4ST

Connections and Schema

## Wiring



"ON" for lighting and/or applying continuous sound. Fuse (rated current: 0.5 A)

(1) (2) RD : Red YE: Yellow GR: Green BU: Blue GY: Grey OR: Orange BK: Black

## Recommended replacement(s)

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Beacon Accessories category:

Click to view products by Schneider manufacturer:

Other Similar products are found below:

8WD4400-1AC LR6-M2WJNW XVBL0B4 97584080 XVGB3ST XVMB2RAGSSB 8LT7ALBM XVGB3 XVGB3SH HBJD-CZ-4-S
XVGB4H XVGB2M XVGB4 96000005 96000051 XVGB4S 64723075 64587075 64733075 XVGM2SW 8LT7ALBB XVGB3M
XVGB4ST 84330055 XVGM3ST 96063009 63930001 XVGB2W XVGB1SMFA XVGM3SH 64091000 XVGM2SM XVGB4SW
XVGB4M XVGB4SM 97584004 XVGM3W XVGM3S XVGM2W 84310055 XVGM1SA 69935075 XVGB4SH XVGB2 XVGB2SW
XVGM1SFA XVGB3T XVGB3SM 63445055 96000047