

1-stage filter for 3-phase systems

new



Case 5B-16



Case 5A-4

See below:

**Approvals and Compliances**

**Description**

- Terminals for three phases, neutral conductor and ground
- 1 stage
- Very high attenuation
- Industrial or low leakage current versions

**Unique Selling Proposition**

- Compact design with small footprint
- Single-stage filter for high efficiency
- Light weight design
- Wide temperature range

**Applications**

- Voltage rating 520 VAC for world wide acceptance
- Protection against interference voltage from the mains
- Especially designed for industrial applications such as: Frequency Converters, Stepper Motor Drives, UPS-Systems, Inverters
- Suitable for use in equipment according to IEC/UL 62368-1

**Weblinks**

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Microsite](#)

**Technical Data**

Rated Current	16 - 230A
Rated voltage	300/520VAC, 50/60 Hz
Approval for	16 - 230A @ 50 °C / 300/520VAC; 50/60Hz
Overload Current	1.5 x Ir for 1 minute, per hour
Dielectric Strength	> 2.25kVDC between L-L > 2.75kVDC between L-PE Test voltage 2 sec
Number of Filter Stages	1-stage
Weight	0.9 - 4.1 kg
Material: Housing	Metal
Sealing Compound	UL 94V-0

Mounting	Screw-on mounting on chassis
Terminal	Screw clamps
Operating Temperature	-40°C to 100°C
Climatic Category	40/100/21 acc. to IEC 60068-1
Degree of Protection	IP20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
MTBF	> 200'000h acc. to MIL-HB-217 F

**Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

**Approvals**

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: FMAD NEO

Approval Logo	Certificates	Certification Body	Description
	<a href="#">VDE Approvals</a>	VDE	Certificate Number: 40049000
	<a href="#">UL Approvals</a>	UL	UL File Number: E495089

**Product standards**

Product standards that are referenced

Organization	Design	Standard	Description
	Designed according to	IEC 60939	Passive filters for suppressing electromagnetic interference
	Designed according to	UL 1283	Electromagnetic interference filters





### Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 62368-1	IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment.



### Compliances

The product complies with following Guide Lines



Identification	Details	Initiator	Description
	<a href="#">CE declaration of conformity</a>	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

### Dimension [mm]



Case 5A-4

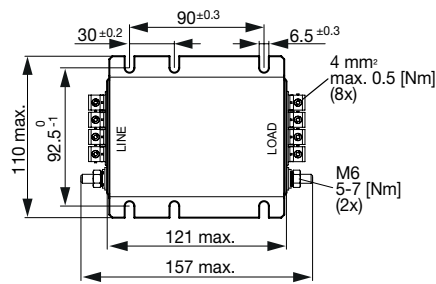



Case 5A-10

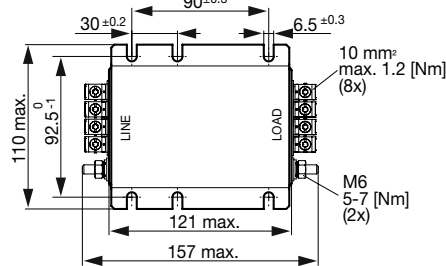


Case 5B-10

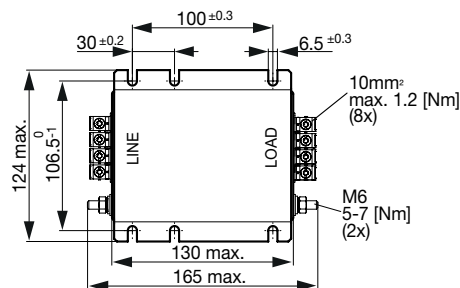


Case 5B-16

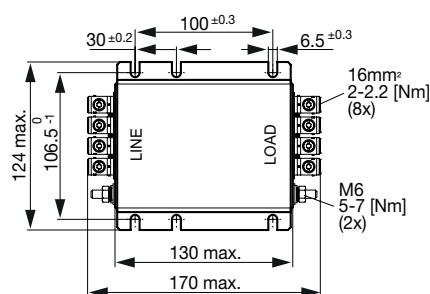


Case 5C-25

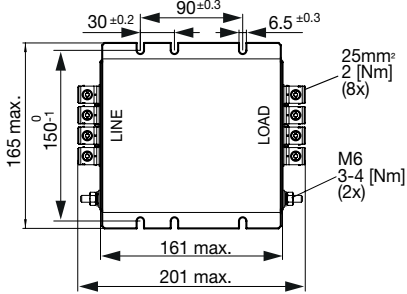

Case 5C-50

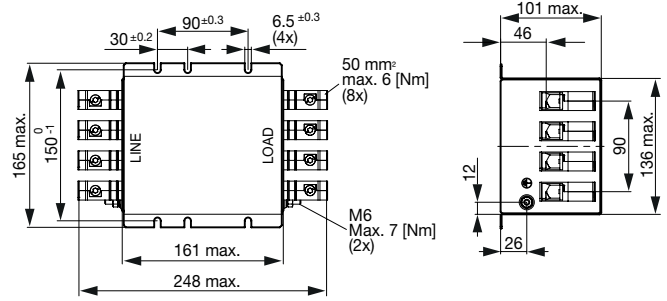


Case 5D-95

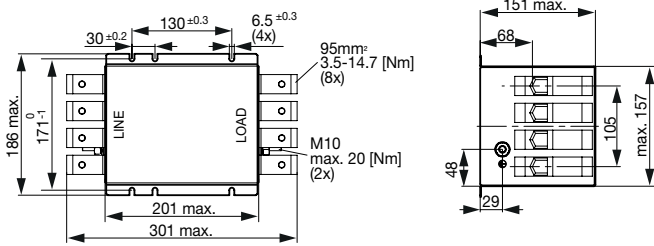


Diagrams

Industrial version

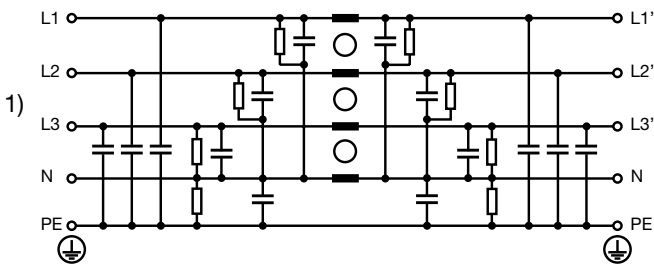


Low leakage current version

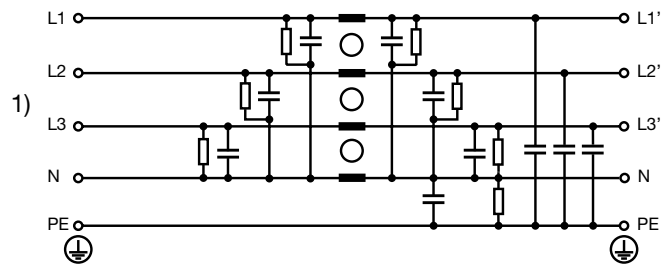


### Attenuation Loss

--- 50Ω differential mode    \_\_\_ 50Ω common mode

Industrial version

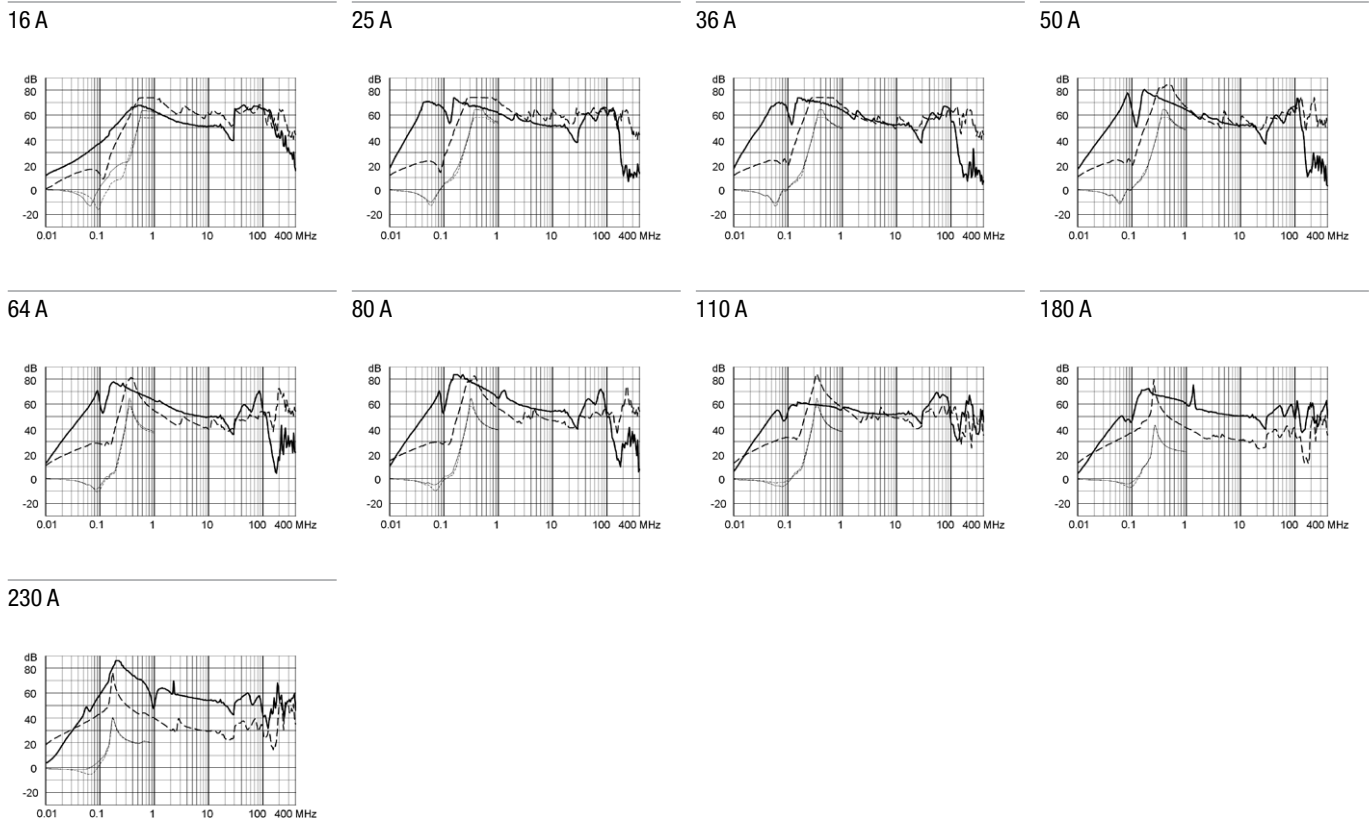

Low leakage current version

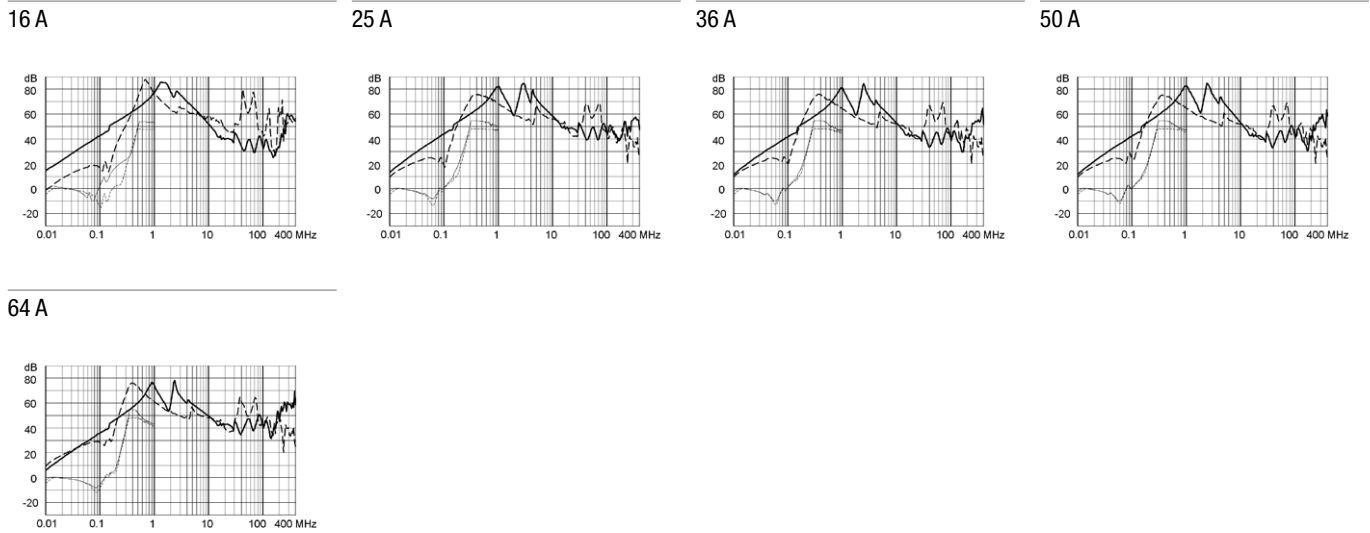

### All Variants

Rated Current @ Ta 50°C [A]	Filter Type	Tripped Power Dissipation [W]	Contact Resi- stance [mΩ]	Leakage Cur- rent [mA] @ 440V, 60Hz 1)	Weight [kg]	Screw clamps [mm2] 2)	Housings	Order Number
16	Industrial version	1.5	5.7	10.5	0.9 kg	4	5A-4	3-108-700
25	Industrial version	1.6	2.5	10.7	1.1 kg	10	5A-10	3-108-701
36	Industrial version	2.1	1.65	10.7	1.3 kg	10	5B-10	3-108-712
50	Industrial version	4.1	1.65	11.4	1.3 kg	10	5B-10	3-108-713
64	Industrial version	3.9	0.94	11.4	1.35 kg	16	5B-16	3-108-714
80	Industrial version	5.2	0.82	12.2	1.45 kg	25	5C-25	3-108-715
110	Industrial version	6.3	0.52	12.2	2.5 kg	50	5C-50	3-108-716

Rated Current @ Ta 50°C [A]	Filter Type	Tripped Power Dissipation [W]	Contact Resi- stance [mΩ]	Leakage Cur- rent [mA] @ 440V, 60Hz 1)	Weight [kg]	Screw clamps [mm <sup>2</sup> ] 2)	Housings	Order Number
180	Industrial version	12	0.37	12.2	3.1 kg	95	5D-95	<a href="#">3-108-717</a>
230	Industrial version	14.3	0.27	13.1	4.1 kg	95	5D-95	<a href="#">3-108-718</a>
16	Low leakage current version	1.5	5.7	1.4	0.9 kg	4	5A-4	<a href="#">3-109-852</a>
25	Low leakage current version	1.6	2.5	3	1.1 kg	10	5A-10	<a href="#">3-109-853</a>
36	Low leakage current version	2.1	1.65	3	1.3 kg	10	5B-10	<a href="#">3-109-854</a>
50	Low leakage current version	4.1	1.65	3	1.3 kg	10	5B-10	<a href="#">3-109-855</a>
64	Low leakage current version	3.9	0.94	3	1.35 kg	16	5B-16	<a href="#">3-109-856</a>

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) Leakage current according IEC 60939-1

2) Maximum conductor cross section (wire gauge) to be used; a comparative table for AWG and mm<sup>2</sup> values can be found in the general product information <https://www.schurter.com/en/FAQ#10>

**Packaging unit** 1 Pcs

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Line Filters](#) category:*

*Click to view products by [Schurter](#) manufacturer:*

Other Similar products are found below :

[6609026-5](#) [6609030-6](#) [6609973-2](#) [F2810](#) [F7140A](#) [F7863Z](#) [806276](#) [FN2080B-10-06](#) [FN2410H-32-33](#) [FN2410H-80-34](#) [FP144](#) [DB4-393](#)  
[F1100AA02](#) [F1150CC10](#) [F1500CA10](#) [F1500CA15](#) [FN2070A-16-06](#) [FN2090Z-1-06](#) [FN2410H-25-33](#) [FN2410H-8-44](#) [FN2412H-25-33](#)  
[FN3258H-130-35](#) [20EHQ7](#) [30B6](#) [01MK4](#) [03MK2](#) [100BCF6](#) [10K1](#) [RWK-305-4-KL](#) [609-025](#) [7-6609082-0](#) [3W1A](#) [6609041-1](#) [6609019-9](#)  
[63AYA10](#) [FN2410-80-34](#) [230FCD10BS](#) [STFV050-24L](#) [36TYT8](#) [100TDS84C](#) [16TYT8-2](#) [FNC1005474103A](#) [F19025](#) [FTA-60-683](#) [12-](#)  
[MMB-030-5-D](#) [6609977-8](#) [150TDS84C](#) [FSB-30-254-U](#) [160TYT8-2](#) [DC1-34014FB-A20CE1](#)