


reSpeaker XVF 3800

AI-powered 4-Mic Array for Clear Voice Even in Noise

reSpeaker is a professional 4-mic circular array based on XMOS XVF3800, enabling clear target voice capture in noisy environments. Features dual modes, 360° far-field voice pickup (up to 5m), AEC, AGC, DoA, VAD, dereverberation, beamforming, and noise suppression.


Pick a Model Tailored to You




reSpeaker XVF3800



reSpeaker XVF3800
with Case



reSpeaker XVF3800
with XIAO ESP32S3
Pre-soldered



reSpeaker XVF3800
with XIAO ESP32S3
(Case Version)

Features



XMOS XVF3800 Upgrade

Smarter voice processing for clearer capture even in noise.



4-Microphone Circular Array

360° far-field voice pickup up to 5 meters.



Plug-and-Play Simplicity

Easy setup with USB interface. No complex setup needed.



Advanced Audio Processing


Clear capture in tough environments with AEC, multi-beamforming, de-reverberation, DoA detection, dynamic noise suppression, and 60dB AGC.



Compact Design for Embedded Applications

Bottom-firing microphones and a flat PCB for easy embedding.

Applications

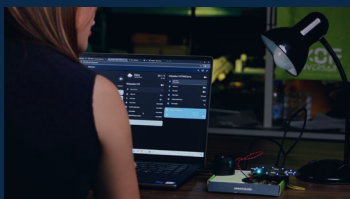

Smart Home



Robot



Conference



Cross-industry Voice Control



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio IC Development Tools](#) *category:*

Click to view products by [Seeed Studio](#) *manufacturer:*

Other Similar products are found below :

[124](#) [ETLUM2-SOM](#) [ISD5102EY](#) [1381](#) [DA7217-EVAL](#) [AC102014](#) [CDB5366](#) [CDB5340](#) [CDB42518](#) [CDB3318](#) [CDB3310](#)
[LM4780TABD/NOPB](#) [2130](#) [2220](#) [2341](#) [2342](#) [2716](#) [2716](#) [DFR0064](#) [DFR0119](#) [2217](#) [MIKROE-2720](#) [EV_ICS-40300-FX](#) [SEN-14262](#)
[DA7218-EVAL](#) [3357](#) [EV_ICS-43434-FX](#) [3346](#) [EV_ICS-40618-FX](#) [3436](#) [BOB-12758](#) [3421](#) [SOMO-II](#) [124](#) [1552](#) [1713](#) [1752](#) [1790](#) [2133](#)
[3492](#) [3885](#) [4227](#) [4346](#) [4384](#) [5769](#) [5770](#) [5791](#) [6049](#) [987](#) [AS3418_EK_ST](#)