

Description


RClamp® TVS diodes are designed to protect sensitive electronics from damage or latch-up due to ESD, and EOS. They feature large cross-sectional area junctions for conducting high transient currents. They offer desirable characteristics for board level protection including fast response time, low operating and clamping voltage, and no device degradation.

RClamp04022S is in a SOT23-3 Lead package. The Leads are finished with lead-free matte tin. They may be used to meet the ESD immunity requirements of IEC 61000-4-2 ($\pm 30\text{kV}$ air, $\pm 30\text{kV}$ contact discharge). Low maximum capacitance (0.75pF at $V_R=0\text{V}$) minimizes loading on sensitive circuits. Each device will protect two high speed data lines operating at 4 volts.

Applications

- USB 2.0
- LVDS
- GPIO
- Analog Video
- USB Type-C
- Keypad

Nominal Dimensions



Nominal Dimensions in mm


Features

- High ESD withstand voltage
 - IEC 61000-4-2 (ESD): $\pm 30\text{kV}$ (contact), $\pm 30\text{kV}$ (air)
 - IEC 61000-4-5 (Lightning): 18A (8/20 μs)
 - IEC 61000-4-4 (EFT): 4kV, 80A
- Low capacitance: 0.75pF Max
- Protects two high speed data lines
- Working voltage: 4V
- Low ESD clamping voltage
- Low dynamic resistance: 0.12 Ω typical
- Low reverse leakage current
- Solid-state silicon-avalanche technology

Mechanical Characteristics

- Package: SOT23 3L
- Pb-Free, Halogen Free, RoHS/WEEE Compliant
- Molding compound flammability rating: UL 94V-0
- Lead Finish: Pb-Free
- Marking: Marking code + Date Code
- Packaging: Tape and Reel

Schematic and Pin Configuration

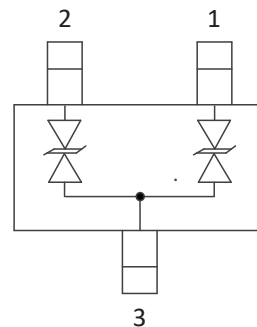

SOT23 3L

Absolute Maximum Rating

RATING	SYMBOL	VALUE	UNITS
Peak Pulse Power (tp = 8/20μs)	P_{PK}	100	W
Peak Pulse Current (tp = 8/20μs)	I_{PP}	18	A
ESD per IEC 61000-4-2 (Contact) ⁽¹⁾	V_{ESD}	±30	kV
ESD per IEC 61000-4-2 (Air) ⁽¹⁾		±30	
Operating Temperature	T_J	-40 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Characteristics

T=25°C unless otherwise specified

All measurements from Pin 1 to Pin 3 or Pin 2 to Pin 3

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage	V_{RWM}				4	V
Reverse Breakdown Voltage	V_{BR}	$I_t = 1mA$	6	7.6	10	V
Reverse Leakage Current	I_R	$V_{RWM} = 4V$		<10	50	nA
Clamping Voltage ⁽²⁾	V_C	$t_p = 1.2/50\mu s$ (Voltage), 8/20us (Current) Combination waveform, $R_s = 2\ \Omega$, $I_{PP} = 18A$		4.6	5.6	V
ESD Clamping Voltage ⁽³⁾	V_C	$I_{TLP} = 4A$, $t_p = 0.2/100ns$ (TLP)		3.0		V
		$I_{TLP} = 16A$, $t_p = 0.2/100ns$ (TLP)		4.4		
Dynamic Resistance ^{(3),(4)}	R_{DYN}	$t_p = 0.2/100ns$ (TLP)		0.12		Ω
Junction Capacitance	C_J	$V_R = 0V$, $f = 1MHz$		0.44	0.75	pF

Notes:

(1): ESD gun return path connected to Ground Reference Plane (GRP)


(2) Measured using a 1.2/50μs voltage, 8/20μs current combination waveform, $R_S = 2\ \Omega$. Clamping is defined as the clamping voltage after the device snaps back to a conducting state.

(3): Transmission Line Pulse Test (TLP) Settings: $t_p = 100ns$, $t_r = 0.2ns$, I_{TLP} and V_{TLP} averaging window: $t_1 = 70ns$ to $t_2 = 90ns$


(4): Dynamic resistance calculated from $I_{TLP} = 4A$ to $I_{TLP} = 16A$

Typical Characteristics


ESD Clamping (8kV Contact per IEC 61000-4-2)

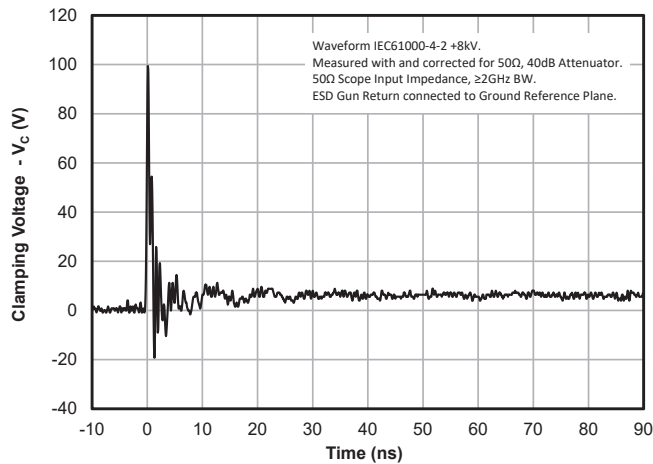


ESD Clamping (-8kV Contact per IEC 61000-4-2)

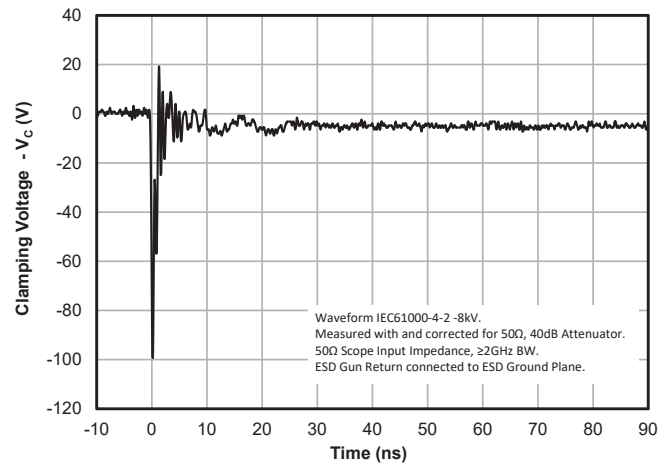


TLP Characteristics (Positive Pulse)

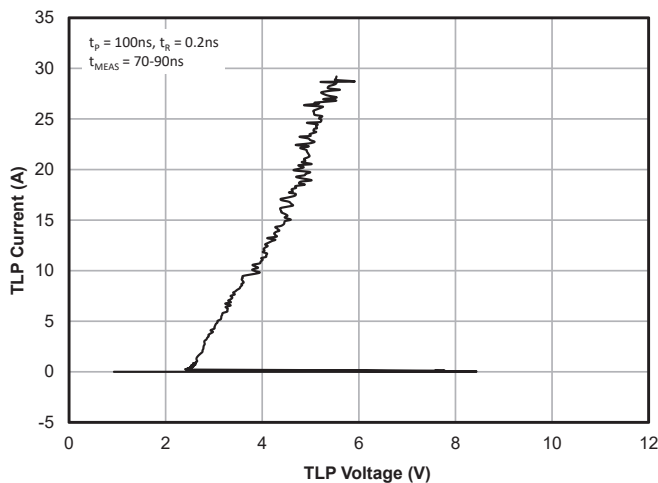


TLP Characteristics (Negative Pulse)

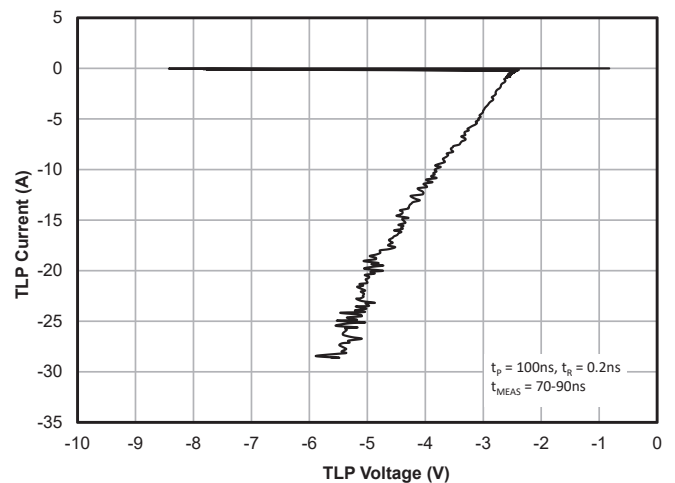

Clamping Voltage vs. Peak Pulse Current ($t_p = 1.2/50\mu\text{s}$)

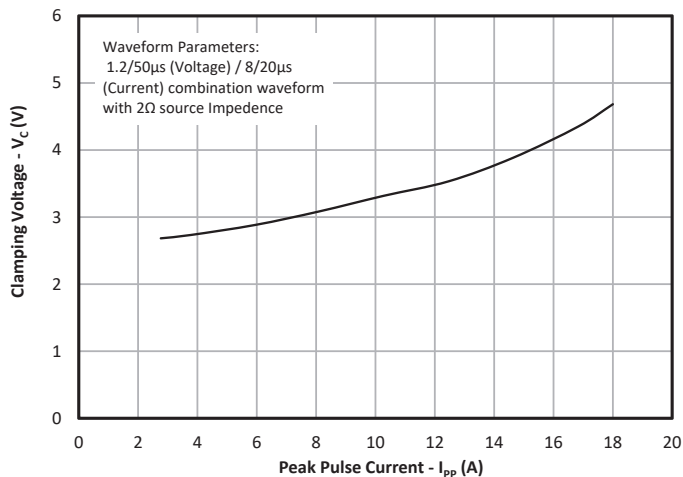


Capacitance vs. Reverse Voltage

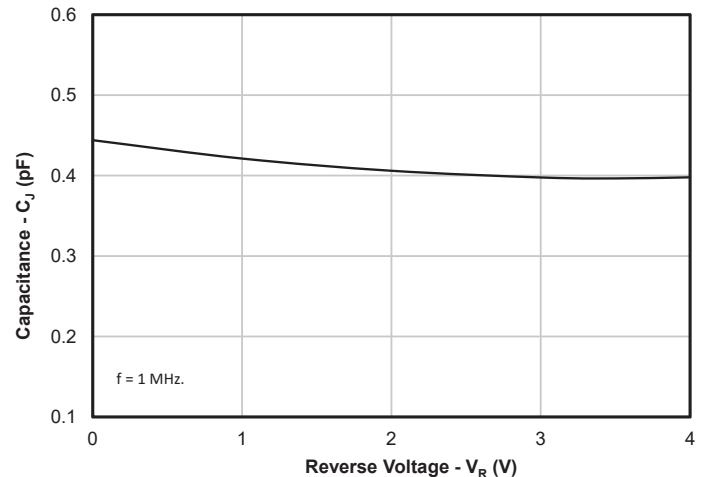


Typical Characteristics


Insertion Loss - S21

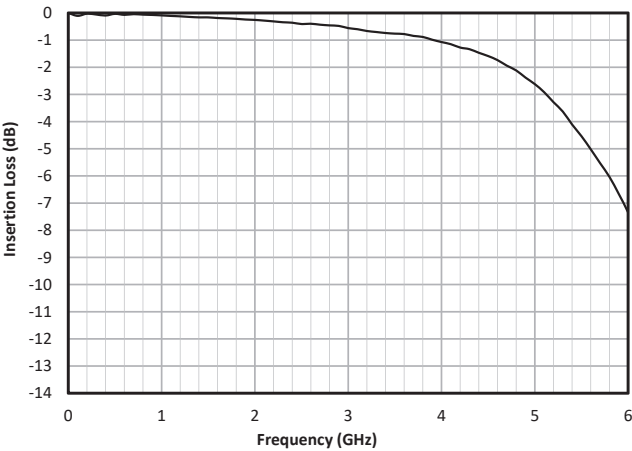


Outline Drawing - SOT23 3L

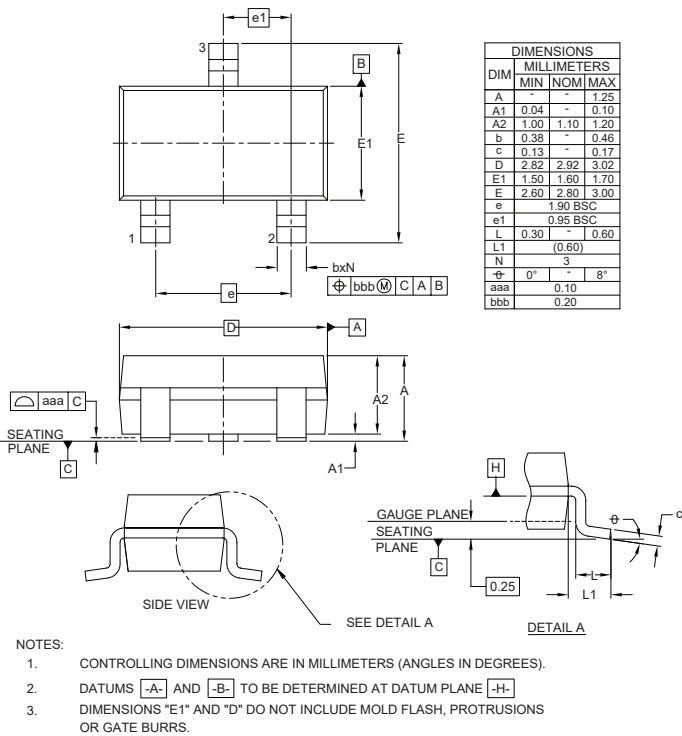

Landing Pattern - SOT23 3L

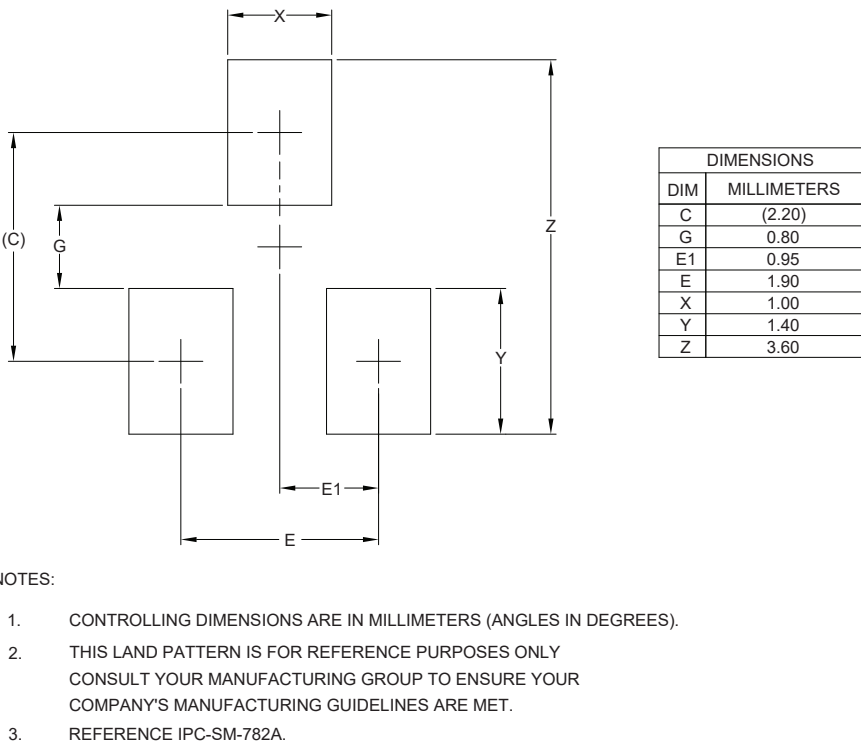


Marking Code




Note: YW = Date Code

Tape and Reel Specification

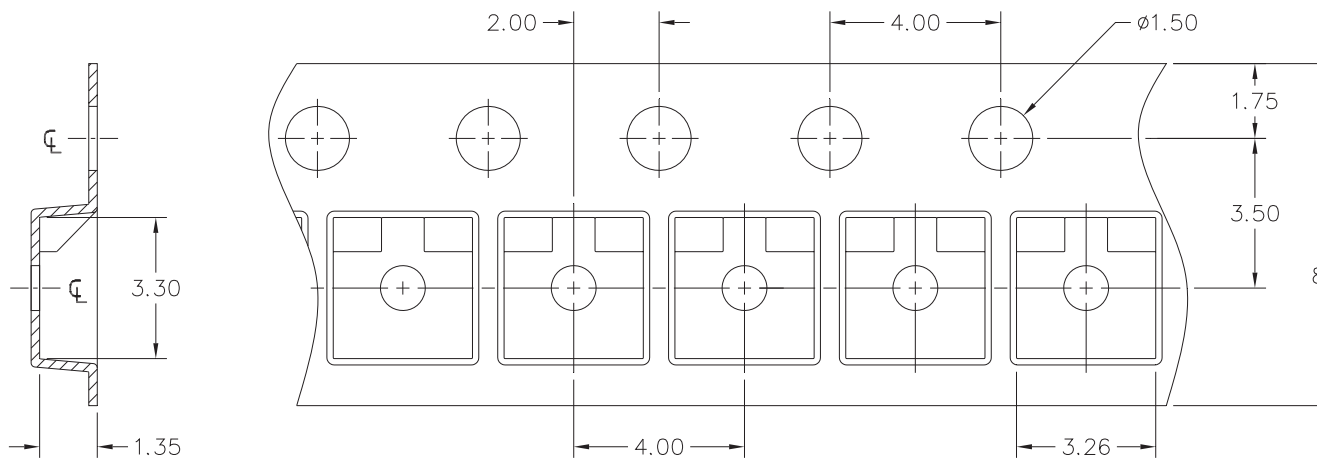

Note: All dimensions are nominal dimensions in mm.



Order Information

PART NUMBER	QTY PER REEL	REEL SIZE
RClamp04022S.C	3,000	7"
RailClamp and RClamp are registered trademarks of Semtech Corporation.		



SEMTECH®

Important Notice

Information relating to this product and the application or design described herein is believed to be reliable, however such information is provided as a guide only and Semtech assumes no liability for any errors in this document, or for the application or design described herein. Semtech reserves the right to make changes to the product or this document at any time without notice. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. Semtech warrants performance of its products to the specifications applicable at the time of sale, and all sales are made in accordance with Semtech's standard terms and conditions of sale.

Product features listed in this datasheet may be suitable for "non-safety" applications in Automotive use cases. Information in this datasheet for such applications is provided as a guide only. No safety claim is made in respect of the product described in this datasheet when used in Automotive safety systems or security devices, including systems for controlling vehicles and other transportation equipment; responsibility for achieving safety goals belongs solely to the buyer and/or integrators. Semtech is under no obligation to provide any data regarding safety integration to the buyer or any integrator.

SEMTECH PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED OR WARRANTED TO BE SUITABLE FOR USE IN AUTOMOTIVE SAFETY OR SECURITY DEVICES, INCLUDING SYSTEMS FOR CONTROLLING VEHICLES AND OTHER TRANSPORTATION EQUIPMENT, LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS, OR IN NUCLEAR APPLICATIONS IN WHICH THE FAILURE COULD BE REASONABLY EXPECTED TO RESULT IN PERSONAL INJURY, LOSS OF LIFE OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. INCLUSION OF SEMTECH PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE UNDERTAKEN SOLELY AT THE CUSTOMER'S OWN RISK. Should a customer purchase or use Semtech products for any such unauthorized application, the customer shall indemnify and hold Semtech and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs damages and attorney fees which could arise.

The Semtech name and logo are registered trademarks of the Semtech Corporation. All other trademarks and trade names mentioned may be marks and names of Semtech or their respective companies. Semtech reserves the right to make changes to, or discontinue any products described in this document without further notice. Semtech makes no warranty, representation or guarantee, express or implied, regarding the suitability of its products for any particular purpose. All rights reserved.

© Semtech 2024

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Protection Diodes / TVS Diodes](#) ***category:***

Click to view products by [Semtech](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D5V0F4U5P5-7](#) [P4KE27CA](#) [P6KE11CA](#) [JAN1N6461](#) [P6KE8.2A](#) [JANTX1N6475](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [CPDT-5V0USP-HF](#) [HSPC16701B02TP](#) [JANTX1N6052A](#)
[D3V3Q1B2DLP3-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [CEN955 W/DATA](#) [ESD101-B1-02EL E6327](#) [5KP48A](#) [5KP90A](#)
[15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P6KE13CA](#) [P6KE43CA](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#) [SA8.5A](#) [SA18A](#)
[SA11CA](#) [SMCJ78CA](#) [SMBJ51CA](#) [JANTX1N5650A](#) [SMDA05LC-LF](#) [30KPA48A-LF](#) [GPZ1275](#) [P4KE6.8A](#) [CPDQC12VE-HF](#)
[GRPADATAJANTX1N6041A](#) [DSILC6-4SC6](#) [5KP45A-TP](#) [SMLJ26A-TP](#) [D5V0Q1B2CSP-7](#) [NSPM3042MXT5G](#)