D Series

High Voltage relays 10kV & 15kV



Very high isolation voltages, up to 15kV, are achieved through the use of high vacuum reed switches with either Rhodium or Tungsten contacts and make these relays suitable for high reliability applications, such as cardiac defibrillators, test equipment and high voltage power supplies.

The Rhodium contact relays have low contact resistance, while the Tungsten contact relays can switch higher voltages.

PCB or Panel Mount, via Nylon studs, versions are available.

Connection options, for the HV, include PCB, solder turret(wire wrap), flying lead and 0.25" spade terminals.

- 10kV or 15kV Isolation
- Low Contact Resistance
- PCB or Panel Mount
- HV connections via Flying Leads, Solder Turret (wire wrap), or 1/4" Spade Terminals
- Excellent AC characteristics

10kV S	10kV SPNO		SPNC	15kV SPNO	
DI 1:	Ŧ .	DI 1:	T .		
I	-		-		
1					
. -		-			
	-		-	_	
<0.2	<0.2	<0.2 <	<0.2	<0.2	
1.09	1.09	109 1	09	109	
0					
					ı.
				1	24V
0.7				0.7	20
1	1.20				
					3.0
					2.0
					350
change at a rate of	f 0.4% per degree	C. Values are	stated at room tem	perature (20 degrees	C)
	17	1	7	17	
	17	'	. /	17	
1010 (10	1010 (1013)		010 (1013)	10 ¹⁰ (10 ¹³)	
10 (10	,	1 -		1 20 (10	,
	Rhodiun 10 50 k 1000 k 3 k 4 <0.2 10° 50 (15) 10° (1' 5V 1 3.7 0.5 3.0 2.0 28 change at a rate of	Rhodium Tungsten 10 10 50 50 1000 7000 3 2 4 3 <0.2 <0.2 10° 10° 50 (15) 250(100) 10¹¹⁰ (10¹³) 5V 12V 24V 3.0 3.0 3.0 2.0 2.0 2.0 28 150 780	Rhodium Tungsten 10 10 50 50 1000 7000 1000 1000 3 2 3 100 100 1000 1000 3 4 3 4 100 100 1000 1000 1000 1000 1000 1000	Rhodium Tungsten 10 10 10 10 10 50 50 50 50 50 k 1000 7000 1000 7000 k 3 2 3 2 k 4 3 4 3 <0.2 <0.2 <0.2 <0.2 10° 10° 10° 10° 10° 10° 10° 10° 50 (15) 250(100) 10° (101°) 10° 10° 10° 10° 10° 10° 10° 10° 10° 10°	Rhodium Tungsten 10

<u>Please refer to this document for circuit design notes:-</u> <u>http://www.cynergy3.com/blog/application-notes-reed-relays-0</u>

Part Numbering System

D A T 7 12 10 F

Reed Switch Size

Contact Form A=n/o, B=n/c

Contact Material

R=Rhodium,

T=Tungsten

Moulding Ref. No.

Coil Voltage

05=5Vdc, 12=12Vdc,
24=24Vdc

Isolation between

Contacts

10=10kV, 15=15kV

Mounting or Connection Style

ucynergy

No suffix indicates PCB mount F=PCB mount & coil connection with Flying lead HV connection P=Panel mount with wire wrap terminals S=PCB mount & coil connection with stud fixing & 1/4" spade HV connection (not available on 15kV models)

T=PCB mount & coil connection with stud fixing & wire wrap HV connection

www.cynergy3.com

Cynergy3 Components Ltd. 7 Cobham Road Ferndown Industrial Estate Wimborne, Dorset BH21 7PE Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

IS09001 CERTIFIED


D 2018

Made in the UK




MECHANICAL

STANDARD

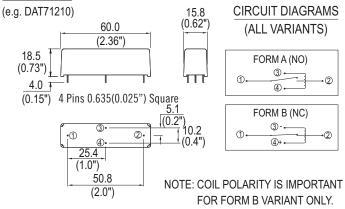


PANEL MOUNT

(e.g. DAT71210P)

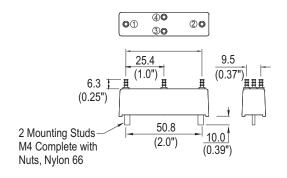


FLYING LEAD

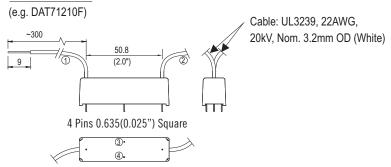

(e.g. DAT71210T)

TURRET (Wire Wrap)




NOTE: PINS WHICH ARE NOT NUMBERED HAVE NO ELECTRICAL CONNECTION.

NOTE: PINS WHICH ARE NOT NUMBERED HAVE NO ELECTRICAL CONNECTION.

SPADE TYPE

(e.g. DAT71210S)

'S' Suffix denotes the 0.250" 'Push On' blade connectors, M4 fixing bolts and Epoxy potting.

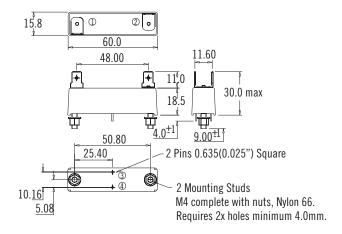

Cynergy3 Components Ltd. 7 Cobham Road Ferndown Industrial Estate Wimborne, Dorset BH21 7PE Telephone +44 (0) 1202 897969 Email:sales@cynergy3.com

<u>Please refer to this document for circuit design notes:-</u> http://www.cynergy3.com/blog/application-notes-reed-relays-0

www.cynergy3.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Reed Relays category:

Click to view products by Sensata manufacturer:

Other Similar products are found below:

M2C24AH D1A05HD-3 8000-0211 8000-0217 836C2 922A06C4C PRMA1A12C PRMA1A24B PRMA1A24C PRMA1B12C

PRMA1B24C PRMA1C05F PRMA2A24C R1C5DR R2A5D 1220-0039 RA30521051 RA31232051 HGS1005 HGS1021 HGS1048

HGS1088 HGS2MT51111F00 HGS2MT51111M00 HGZM1C24 HGZM2C05 HGZM2C48 DA1A24DWD DA1A-24V DA1C05FWD

DA1C12FW DA2A-6V 134MPCX-3 MRR1ADS8-24D MRR1ADS8-5D MRR1ADSK-12D 159-151-T00 MSS62A05 MSS71A05

MSS71A05B MSS71A12 MSS71A24 1804-105 191TE1C2M-5S 191TE2A1-5G 191TE2A1-6G 193RE4C3-24G HYR2001-1520

195TE1B2E-5S 195TE1B2E-6S