



M12 Cable Set Series

Cables for sensors with M12 round connection



- 4 pole M12 connector to IEC61076-2-101
- IP67 protection IEC 60529 (a3)
- Anti-vibration system
- Head temperature range -40 90°C, with good resistance to oils
- Choice of PVC or PUR/PVC cable insulation

Technical Specification

Protection degree IEC 60529 (a3)	IP67
Head temperature range °C	-40 to 90
Cable temperature range °C	PVC -25 to 90 PUR -25 to 80
Housing oil resistance	very good
Housing material	TPU (polyurethane)
Contact material	Gold over nickel plated CuZn
Locking nut material	Nickel plated Brass
Conductor size	4/0.34 mm ²

Electrical Specification

Voltage AC Max	V	250
Voltage DC Max	V	250
Current Max @40°C	A	4
Voltage drop @1A x 1M	V	0.13




The LC cable series can be used with sensors that have M12 round connectors (IEC61076-2-101).

These are supplied as standard with choice of PVC or PUR/PVC sheath insulated cables in lengths of 2, 5 and 10 metres and with either straight or elbow connector bodies.

Standard Parts	Cable sheath	Wire insulation	Wire cores	Body type	Length (m)
LC02FBS-PVC	PVC	PVC	4/0.34	Straight	2
LC05FBS-PVC	PVC	PVC	4/0.34	Straight	5
LC10FBS-PVC	PVC	PVC	4/0.34	Straight	10
LC02FBS-PUR	PUR	PVC	4/0.34	Straight	2
LC05FBS-PUR	PUR	PVC	4/0.34	Straight	5
LC10FBS-PUR	PUR	PVC	4/0.34	Straight	10
LC02FBR-PVC	PVC	PVC	4/0.34	Elbow	2
LC05FBR-PVC	PVC	PVC	4/0.34	Elbow	5
LC10FBR-PVC	PVC	PVC	4/0.34	Elbow	10
LC02FBR-PUR	PUR	PVC	4/0.34	Elbow	2
LC05FBR-PUR	PUR	PVC	4/0.34	Elbow	5
LC10FBR-PUR	PUR	PVC	4/0.34	Elbow	10

Custom versions can be made for particular applications. Please contact Cynergy3 with your requirements.

Mechanical Dimensions

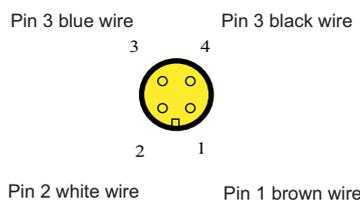

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Fixings & Accessories](#) category:

Click to view products by [Sensata](#) manufacturer:

Other Similar products are found below :

[F03-01 SUS304 BINIL](#) [8000-5130](#) [FH-AP1](#) [PH-1-10M](#) [PH-1-20M](#) [PH-2-30M](#) [AC201](#) [R4](#) [ADI-LC3S](#) [E39-L149](#) [EC18-WELL](#) [PC-15015](#)
[K35-4](#) [A-1923](#) [SS-12143](#) [STA12](#) [AP4-T](#) [PH-1-50M](#) [R6](#) [D01051301](#) [43912557-020](#) [MF-1 D=3.2](#) [BGN-035](#) [E39-L7](#) [ZX-SB11](#) [D01070602](#)
[606072](#) [606075](#) [Y92ES12PVC4A10ML](#) [Y92ES12PVC4S5ML](#) [SA9Z-F11](#) [Z49-SF1](#) [ZFV-XMF2](#) [E4R-R12A-CS3M010](#) [ZX-SW11E V3](#)
[CCS-PL-LDR2-70](#) [E4R-R12A-CS3M020](#) [BS-1T CHITAN](#) [F03-01 CHITAN](#) [CCS-PD2-1012](#) [PH-2-90M](#) [PH-2-5M](#) [XMLZL008](#) [AC244](#)
[28810-1](#) [PH-1-40M](#) [SS-12225](#) [32043-500](#) [81532111](#) [PH-2-60M](#)