




Rating	10A 250V AC 		Circuit Diagram  Nil
Insulation Resistance	DC 500V 100M ohm Min		
Dielectric Strength	AC 1500V 1 minute		
Fuse Size	∅6.35*30 ∅6.35*31.8		



Material:  
Housing: Black,PF  
Terminals: Nickel Plated Brass  
1 HEX NUT ASSY  
1 WASHER ASSY

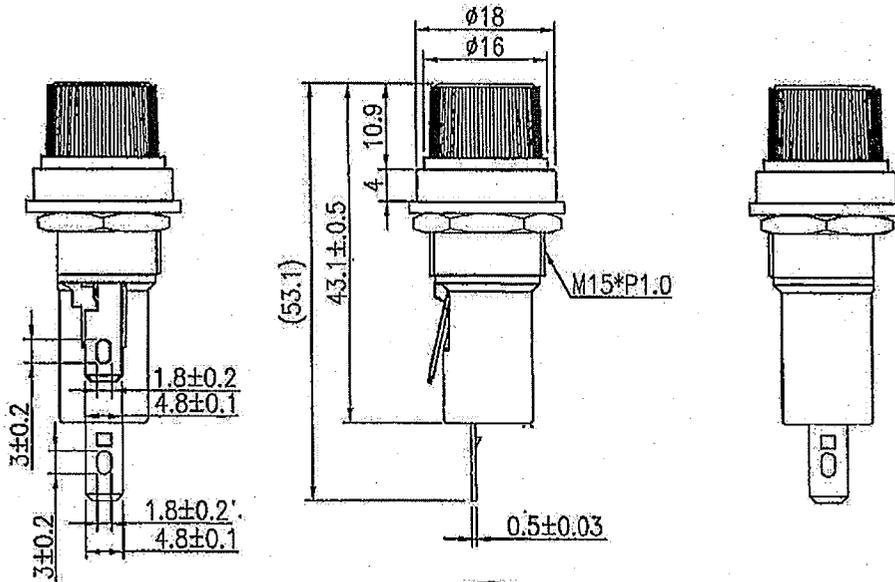

Tolerances ±0.3 Unless Otherwise Specified

10/17/16	柳新強	依品管通知，刪除CSA安規符號					
12/26/13	柳新強	依品管及上級通知要求統一R3系列保險絲規格，保留原6.35*31.8mm，取消6.3*30mm，更改為6.35*30mm					
Date	Name	Description			No.		
Drawn	Checked	Approved	SCI BOM No.	1310344	Model Name	FUSE HOLDER	
柳新強			Customer No.	112-R3-13-02-B	Model No.	R3-13	
10/17/16			Unit	mm	 Shin Chin Industrial Co., Ltd.		
						Rev.	2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuse Holder](#) category:*

*Click to view products by [Shin Chin](#) manufacturer:*

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)  
[R6J30A3S](#) [HFH-1](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-FUSE](#) [HMG-](#)  
[241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-CCHH](#)  
[R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#) [BK/HC-5](#)