

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
100V	6.7mΩ@10V	90A
	8.7mΩ@4.5V	



合肥矽普半导体

Siliup Semiconductor Technology Co., Ltd

技术 品质 服务

www.siliup.com


Feature

- Fast Switching
- Low Gate Charge and Rdson
- Advanced Split Gate Trench Technology
- 100% Single Pulse avalanche energy Test

Applications


- Power switching application
- Battery management
- Uninterruptible power supply

Package

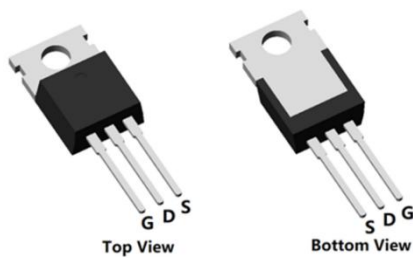


TO-220-3L-C(1:G 2:D 3:S)

Circuit diagram



Marking



010N07AG : Product code
****** : Week code

Order Information

Device	Package	Unit/Tube
SP010N07AGTQ	TO-220-3L	50

Absolute maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	100	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current (Tc=25°C)	I_D	90	A
Continuous Drain Current (Tc=100°C)	I_D	60	A
Pulsed Drain Current	I_{DM}	360	A
Single Pulse Avalanche Energy ¹	E_{AS}	272	mJ
Power Dissipation (Tc=25°C)	P_D	130	W
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	0.96	°C/W
Storage Temperature Range	T_{STG}	55 to 150	°C
Operating Junction Temperature Range	T_J	55 to 150	°C


Electrical characteristics (Ta=25°C, unless otherwise noted)

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	B _V DSS	I _D = 250μA, V _{GS} = 0V	100	-	-	V
Drain Cut-Off Current	I _{DSS}	V _{DS} = 80V, V _{GS} = 0V	-	-	1	μA
Gate Leakage Current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V	-	-	±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1.0	1.7	2.5	V
Drain-Source ON Resistance	R _{DS(ON)}	V _{GS} = 10V, I _D = 30A	-	6.7	8.5	mΩ
		V _{GS} = 4.5V, I _D = 25A	-	8.7	12	
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =50V, V _{GS} = 0V, f = 1.0MHz	-	1942	-	pF
Output Capacitance	C _{oss}		-	388	-	
Reverse Transfer Capacitance	C _{rss}		-	12	-	
Total Gate Charge	Q _g	V _{DS} =50V , V _{GS} =10V , I _D =50A	-	67	-	nC
Gate-Source Charge	Q _{gs}		-	12	-	
Gate-Drain Charge	Q _{gd}		-	21	-	
Switching Characteristics						
Turn-On Delay Time	t _{d(on)}	V _{GS} = 50V, V _{DS} =50V, I _D =50A R _G = 4.7Ω	-	12	-	nS
Rise Time	t _r		-	11	-	
Turn-Off Delay Time	t _{d(off)}		-	42	-	
Fall Time	t _f		-	6	-	
Drain-Source Body Diode Characteristics						
Source-Drain Diode Forward Voltage	V _{SD}	V _{GS} =0V , I _S =1A , T _J =25℃	-	-	1.2	V
Maximum Body-Diode Continuous Current	I _S		-	-	90	A
Reverse Recovery Time	T _{rr}	I _S =20A, di/dt=100A/us, T _J =25℃	-	59	-	nS
Reverse Recovery Charge	Q _{rr}		-	88	-	nC


Note:

- The EAS test condition is $V_{DD} = 50V, V_{GS} = 10V, L = 0.5mH, R_G = 25\Omega$


Typical Characteristics

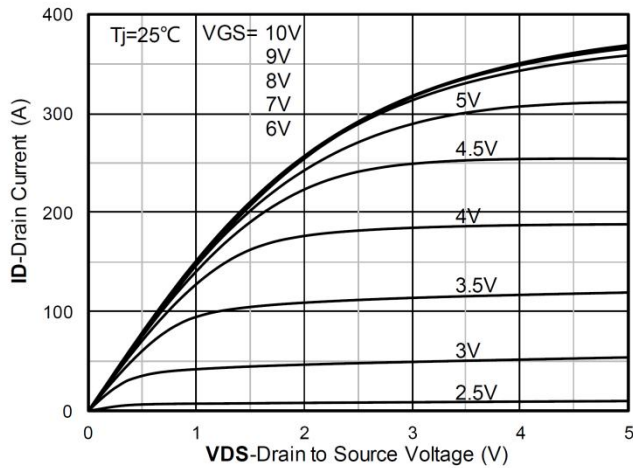


Output Characteristics

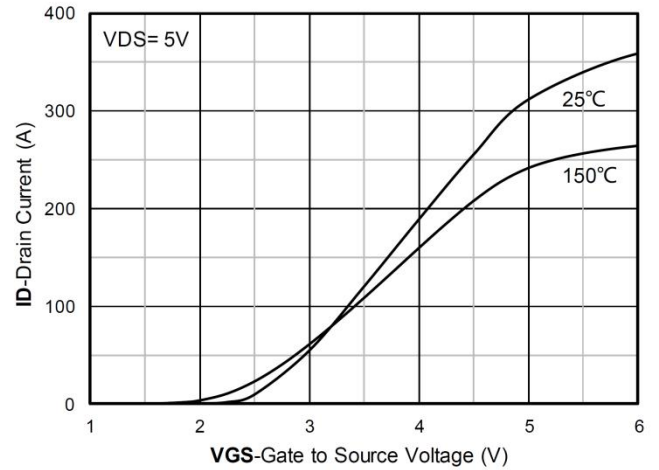


Transfer Characteristics

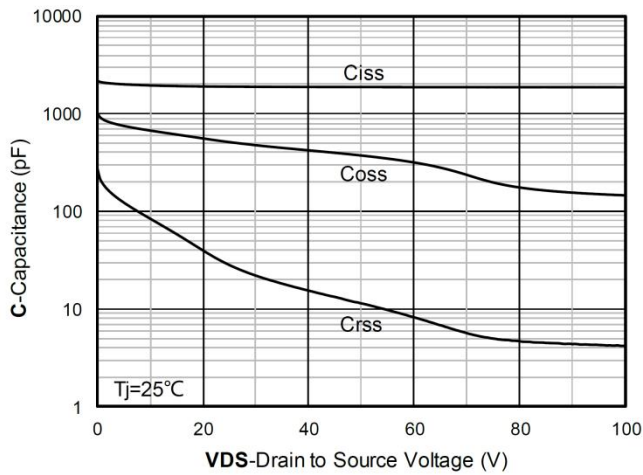


Capacitance Characteristics

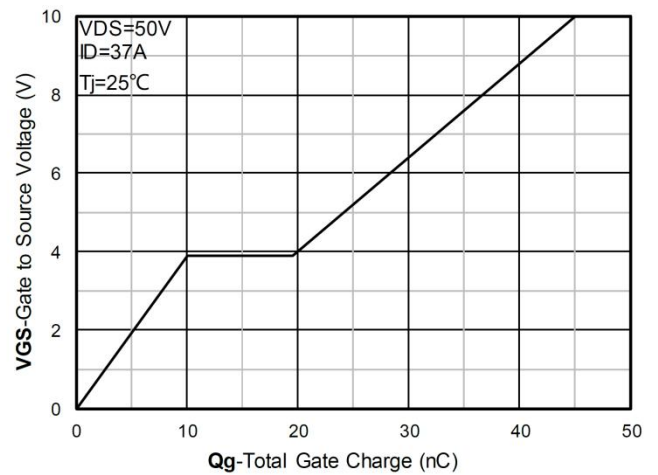


Gate Charge

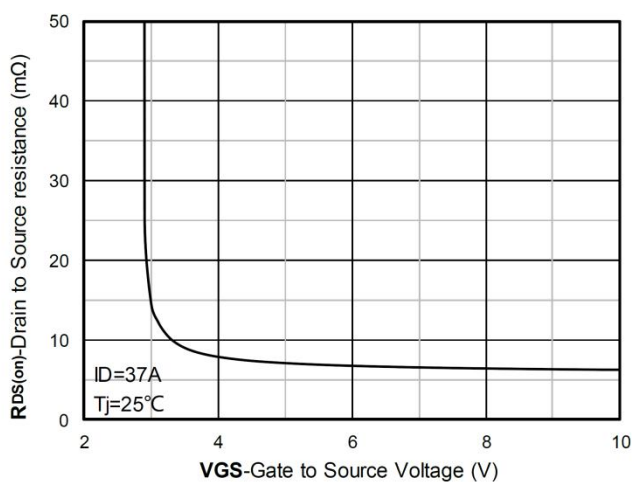


On-Resistance vs Gate to Source Voltage

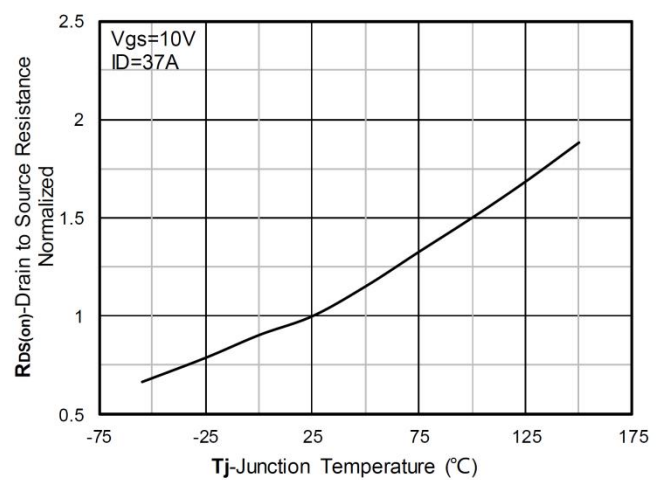


Normalized On-Resistance

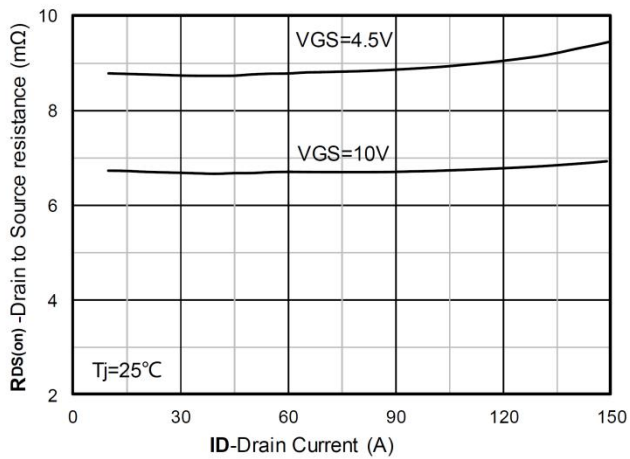


RDS(on) VS Drain Current

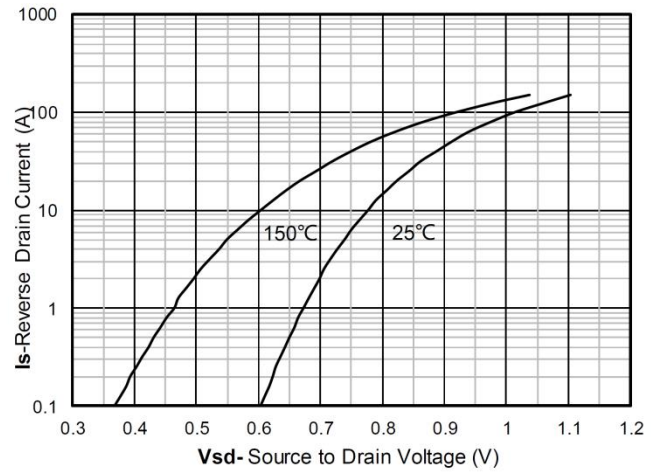


Forward characteristics of reverse diode

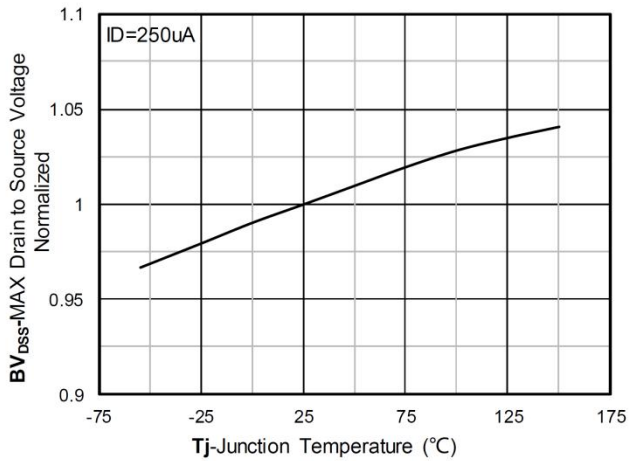


Normalized breakdown voltage

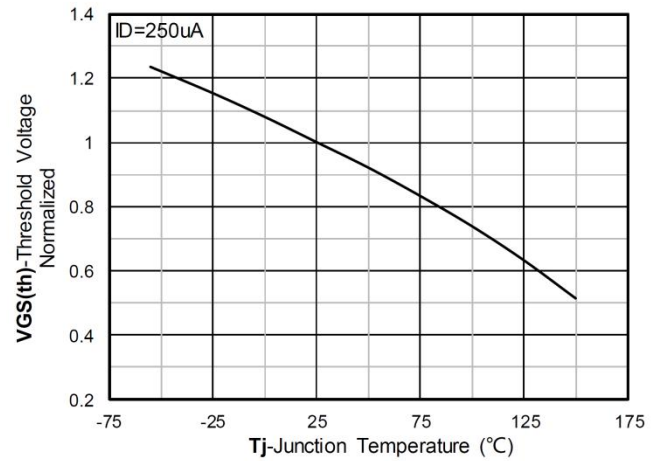



Normalized Threshold voltage

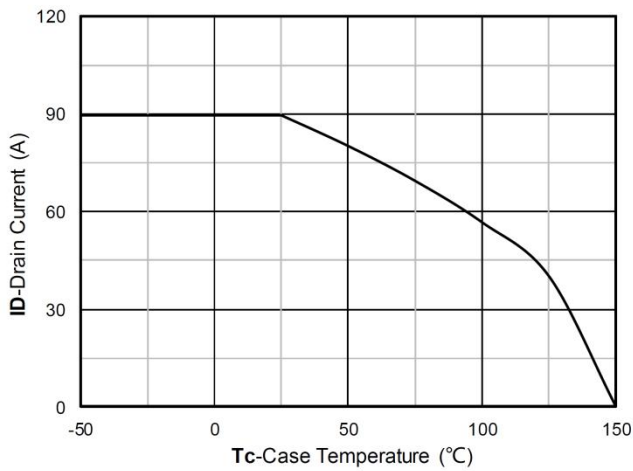


Current dissipation

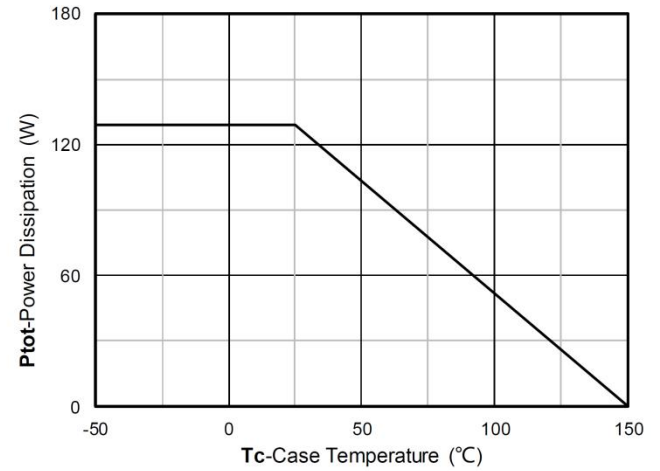

Power dissipation

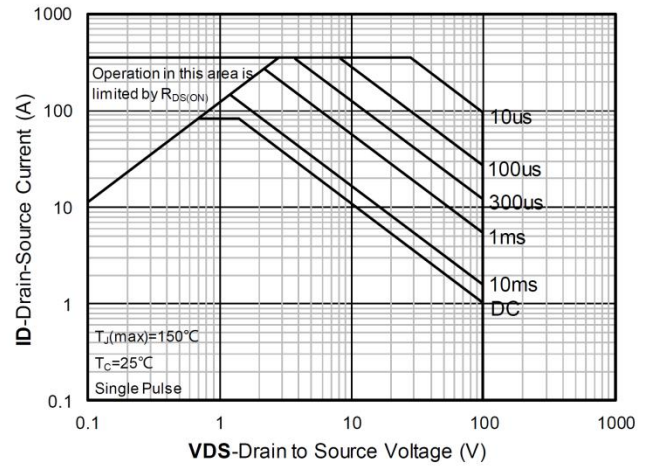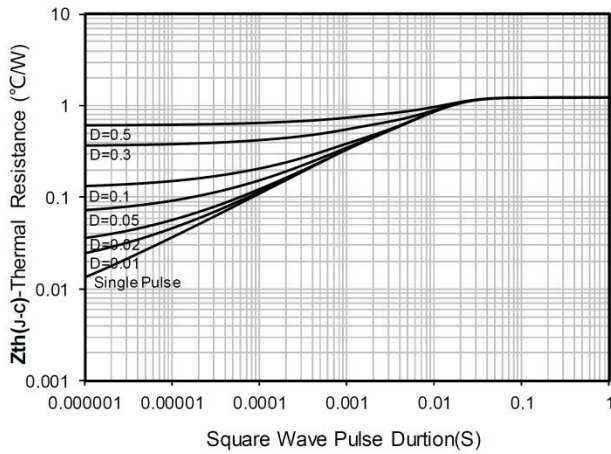

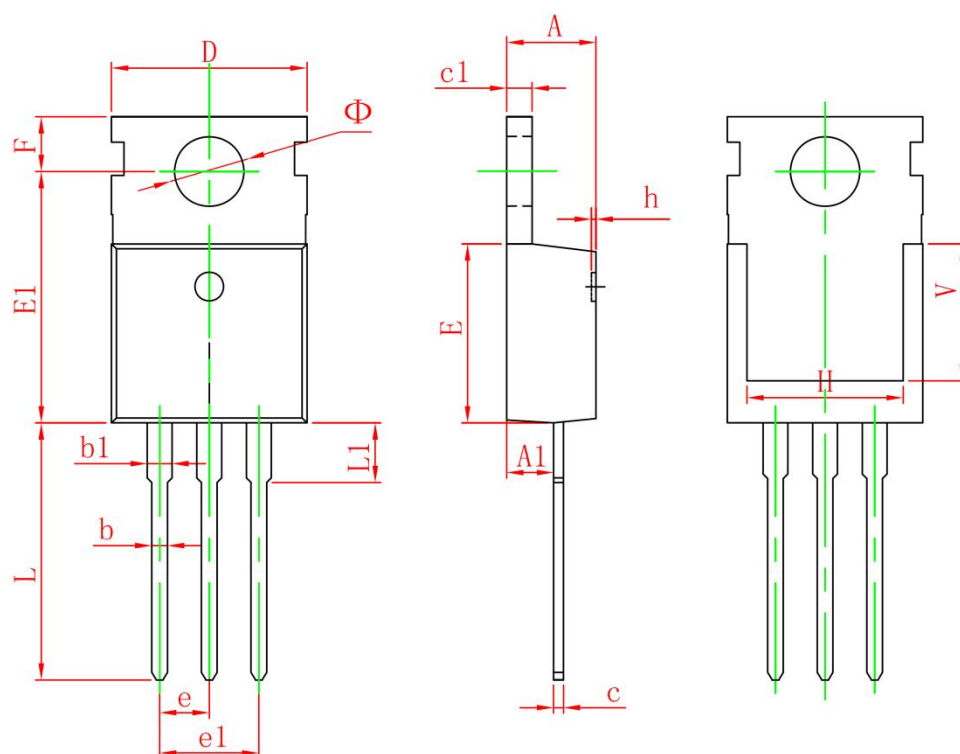TO-220-3L Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.400	4.600	0.173	0.181
A1	2.250	2.550	0.089	0.100
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.330	0.650	0.013	0.026
c1	1.200	1.400	0.047	0.055
D	9.910	10.250	0.390	0.404
E	8.950	9.750	0.352	0.384
E1	12.650	13.050	0.498	0.514
e	2.540 TYP.		0.100 TYP.	
e1	4.980	5.180	0.196	0.204
F	2.650	2.950	0.104	0.116
H	7.900	8.100	0.311	0.319
h	0.000	0.300	0.000	0.012
L	12.900	13.400	0.508	0.528
L1	2.850	3.250	0.112	0.128
V	6.900 REF.		0.276 REF.	
Φ	3.400	3.800	0.134	0.150

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFETs](#) category:

Click to view products by [Siliup](#) manufacturer:

Other Similar products are found below :

[MCH3443-TL-E](#) [MCH6422-TL-E](#) [NTNS3A92PZT5G](#) [IRFD120](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [2SJ277-DL-E](#) [2SK2267\(Q\)](#) [MIC4420CM-TR](#) [IRFS350](#) [IPS70R2K0CEAKMA1](#) [AON6932A](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [SCM040600](#) [NTE2384](#) [2N7000TA](#) [DMN2080UCB4-7](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN13M9UCA6-7](#) [STU7N60DM2](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [2N7002W-G](#) [MCQ7328-TP](#) [IPB45P03P4L11ATMA2](#) [BXP4N65F](#) [BXP2N20L](#) [BXP2N65D](#) [TSM60NB380CP](#) [ROG](#) [SLF10N65ABV2](#) [IRF9395MTRPBF](#) [FCMT080N65S3](#) [NTD5C632NLT4G](#) [NTMFS0D55N03CGT1G](#) [NTMFS1D15N03CGT1G](#) [NTMTS0D4N04CTXG](#) [NTMYS2D1N04CLTWG](#) [NVD360N65S3T4G](#) [NVD5C464NLT4G](#) [NVMTS001N06CLTXG](#) [NVMTS1D1N04CTXG](#)