

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
20V	60mΩ@4.5V	1.2A
	70mΩ@2.5V	



合肥矽普半导体

Siliup Semiconductor Technology Co., Ltd

技术 品质 服务

www.siliup.com

Feature

- High power and current handing capability
- Surface mount package

Application


- Battery Switch
- DC/DC Converter

Package




PDFN1006-3L

Circuit diagram



Marking



262

:Device Code

Order Information

Device	Package	Unit/Tape
SP2620NC	PDFN1006-3L	10000


Absolute maximum ratings (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current	I_D	1.2	A
Pulse Drain Current Tested	I_{DM}	4.8	A
Power Dissipation	P_D	150	mW
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	833	°C/W
Storage Temperature Range	T_{STG}	-55 to 150	°C
Operating Junction Temperature Range	T_J	-55 to 150	°C


Electrical characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	VGS=0V , ID=250μA	20	-	-	V
Drain-Source Leakage Current	I _{DSS}	VDS=13V , VGS=0V	-	-	1	uA
Gate-Source Leakage Current	I _{GSS}	VGS=±20V , VDS=0V	-	-	±100	nA
Gate Threshold Voltage	VGS(th)	VDS=VGS , ID=250μA	0.4	0.65	1	V
Static Drain-Source On-Resistance	R _{DS(ON)}	VGS=4.5V, ID =1A	-	60	90	mΩ
		VGS=2.5V, ID =0.5A	-	70	110	
Dynamic characteristics						
Input Capacitance	C _{iss}	VDS=10V , VGS=0V , f=1MHz	-	226	-	pF
Output Capacitance	C _{oss}		-	35	-	
Reverse Transfer Capacitance	C _{rss}		-	21	-	
Total Gate Charge	Q _g	VDS=10V , VGS=4.5V , ID=1.2A	-	4.0	-	nC
Gate-Source Charge	Q _{gs}		-	0.85	-	
Gate-Drain Charge	Q _{gd}		-	0.67	-	
Switching Characteristics						
Turn-On Delay Time	t _{d(on)}	VDD=10V VGS=4.5V , RG=6Ω , ID=1.2A	-	7	-	nS
Turn-On Rise Time	t _r		-	55	-	
Turn-Off Delay Time	t _{d(off)}		-	14	-	
Turn-Off Fall Time	t _f		-	43	-	
Source-Drain Diode characteristics						
Diode Forward Voltage	V _{SD}	VGS=0V , IS=1A , TJ=25℃	-	-	1.2	V


Typical Characteristics

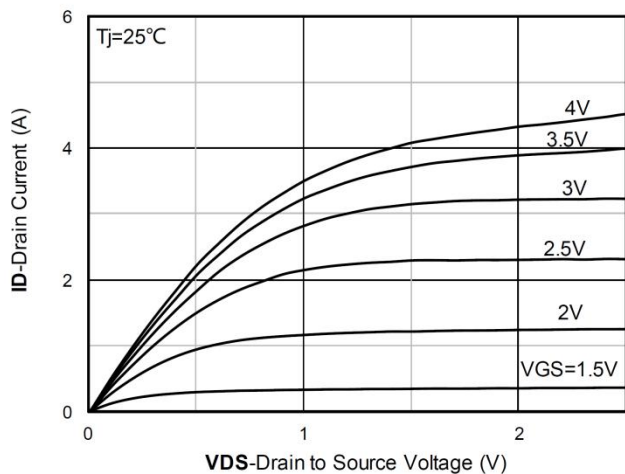


Output Characteristics

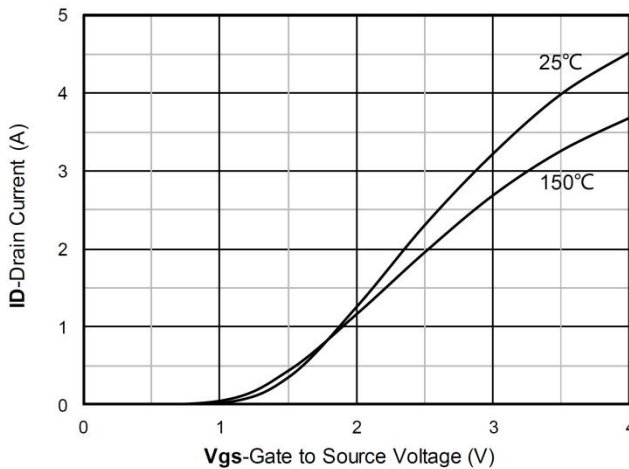


Transfer Characteristics

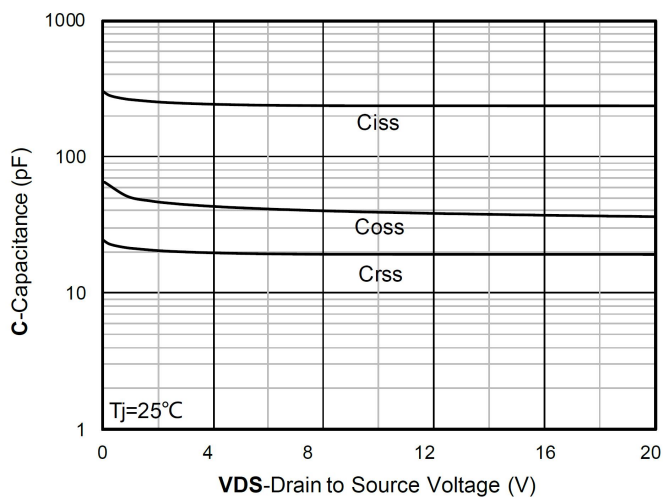


Capacitance Characteristics

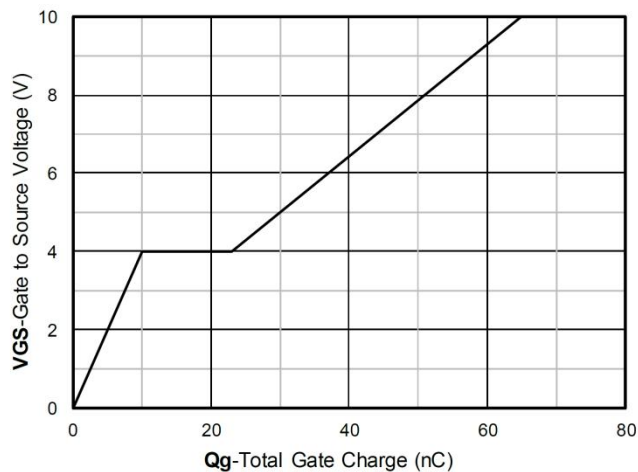


Gate Charge

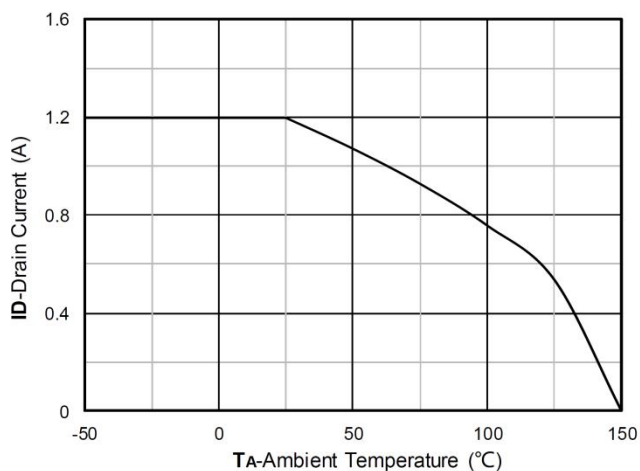


Current dissipation

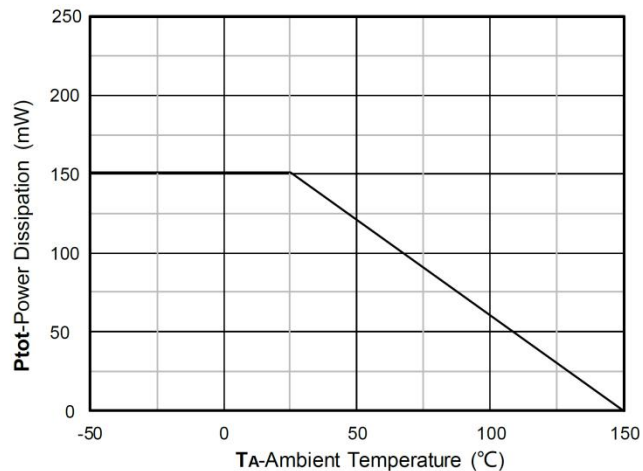


Power dissipation

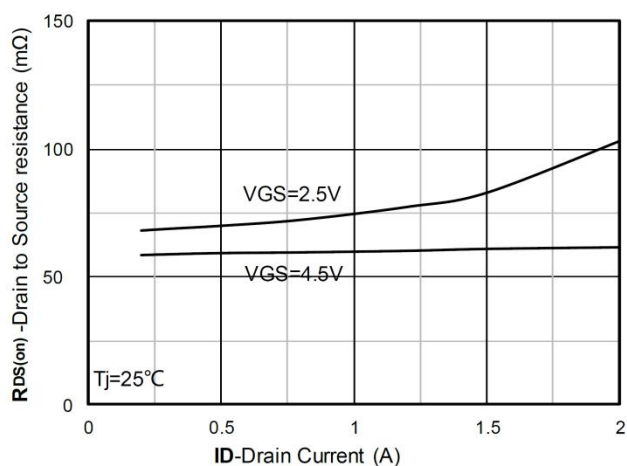


$R_{DS(on)}$ VS Drain Current

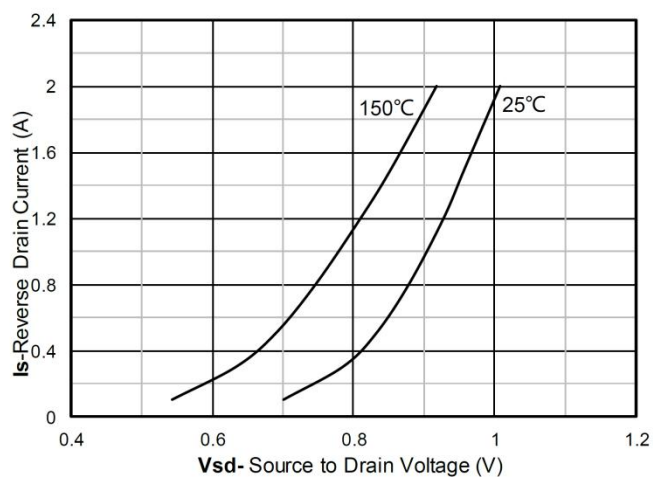


Forward characteristics of reverse diode

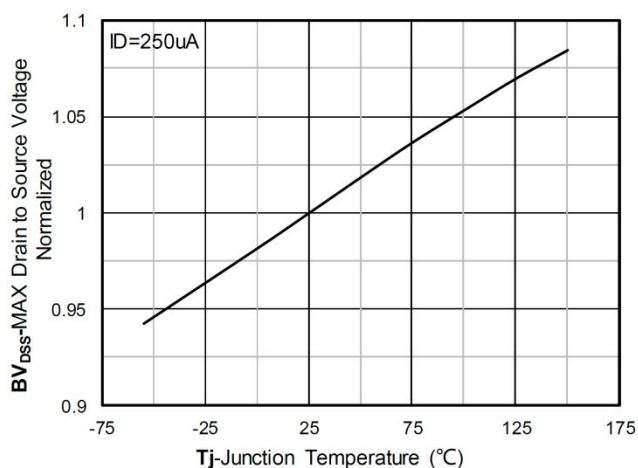


Normalized breakdown voltage

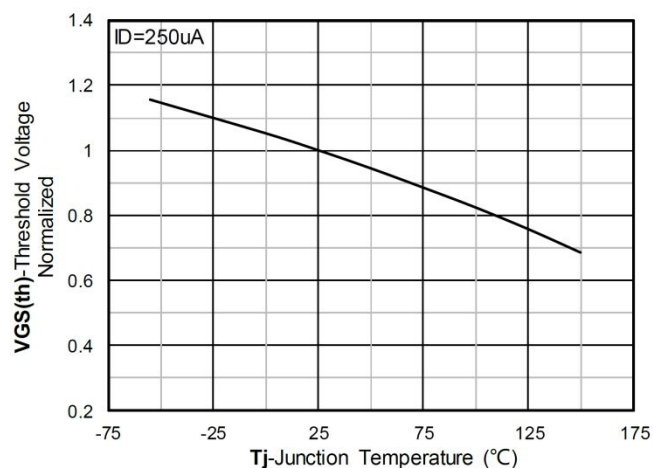

Normalized Threshold voltage

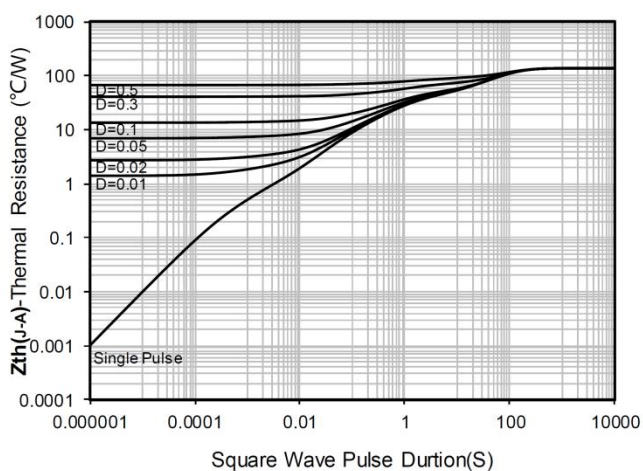


Maximum Transient Thermal Impedance

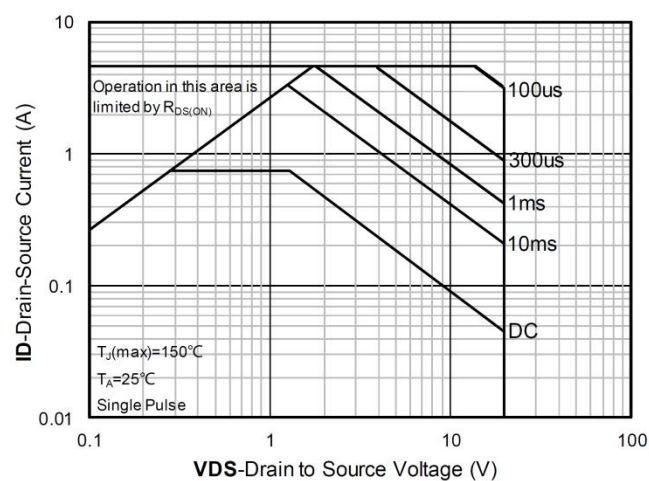

Safe Operation Area

PDFN1006-3L Package Information

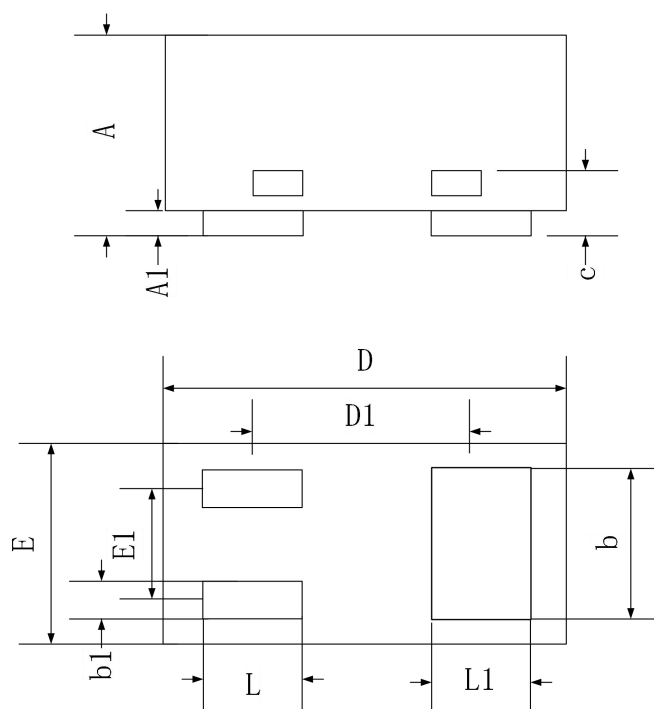

Symbol	Dimensions in millimeters	
	Min.	Max.
A	0.46	0.51
A1	0	0.05
b	0.45	0.55
b1	0.1	0.2
c	0.08	0.18
D	0.95	1.05
D1	0.65	
E	0.55	0.65
E1	0.325	
L	0.2	0.3
L1	0.2	0.3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFETs](#) category:

Click to view products by [Siliup](#) manufacturer:

Other Similar products are found below :

[MCH3443-TL-E](#) [MCH6422-TL-E](#) [NTNS3A92PZT5G](#) [IRFD120](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [2SJ277-DL-E](#) [2SK2267\(Q\)](#) [MIC4420CM-TR](#) [IRFS350](#) [IPS70R2K0CEAKMA1](#) [AON6932A](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [SCM040600](#) [NTE2384](#) [2N7000TA](#) [DMN2080UCB4-7](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN13M9UCA6-7](#) [STU7N60DM2](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [2N7002W-G](#) [MCQ7328-TP](#) [IPB45P03P4L11ATMA2](#) [BXP4N65F](#) [BXP2N20L](#) [BXP2N65D](#) [TSM60NB380CP](#) [ROG](#) [SLF10N65ABV2](#) [IRF9395MTRPBF](#) [FCMT080N65S3](#) [NTD5C632NLT4G](#) [NTMFS0D55N03CGT1G](#) [NTMFS1D15N03CGT1G](#) [NTMTS0D4N04CTXG](#) [NTMYS2D1N04CLTWG](#) [NVD360N65S3T4G](#) [NVD5C464NLT4G](#) [NVMTS001N06CLTXG](#) [NVMTS1D1N04CTXG](#)