



Bridge Rectifier



Features

- UL recognition, file #E230084
- Ideal for printed circuit boards
- High surge current capability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

General purpose use in AC/DC bridge full wave rectification for monitor, TV, printer, power supply, switching mode power supply, adapter, audio equipment, and home appliances applications.

Mechanical Data

- **Package:** GBU
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	GBU6005	GBU601	GBU602	GBU604	GBU606	GBU608	GBU610
Device marking code				GBU6005	GBU601	GBU602	GBU604	GBU606	GBU608	GBU610
Repetitive peak reverse voltage		VRRM	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, R-load	With heatsink Tc =110℃	IO	A	6.0						
	Without heatsink Ta =25℃			2.8						
Surge(non-repetitive)forward current @60Hz half sine wave, 1 cycle, Tj=25℃		IFSM	A	150						
Current squared time @1ms≤t≤8.3ms Tj=25℃, Rating of per diode		I²t	A²S	93						
Storage temperature		Tstg	℃	-55 ~+150						
Junction temperature		Tj	℃	-55 ~+150						
Dielectric strength @terminals to case, AC 1 minute		Vdis	KV	2.5						
Mounting torque @recommend torque: 5kg·cm		Tor	kg·cm	8						





■Electrical Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	GBU6005	GBU601	GBU602	GBU604	GBU606	GBU608	GBU610
Maximum instantaneous forward voltage drop per diode	V _F	V	I _{FM} =3.0A	1.00						
Maximum DC reverse current at rated DC blocking voltage per diode	I _{RRM}	μA	V _{RM} =V _{RRM}	5						


■ Thermal Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	GBU6005	GBU601	GBU602	GBU604	GBU606	GBU608	GBU610
Thermal Resistance	Between junction and ambient, Without heatsink	$R_{\theta J-A}$	$^{\circ}\text{C/W}$	26.0						
	Between junction and case, With heatsink	$R_{\theta J-C}$		3.4						

■ Characteristics (Typical)

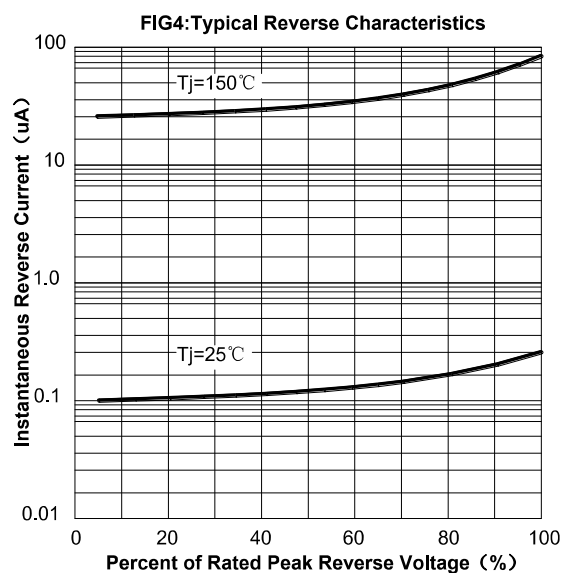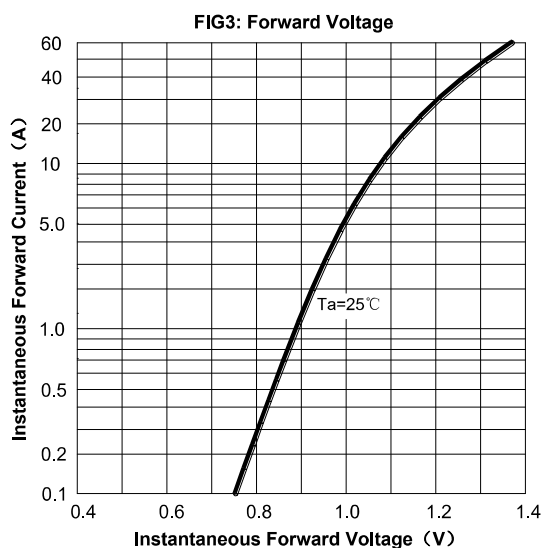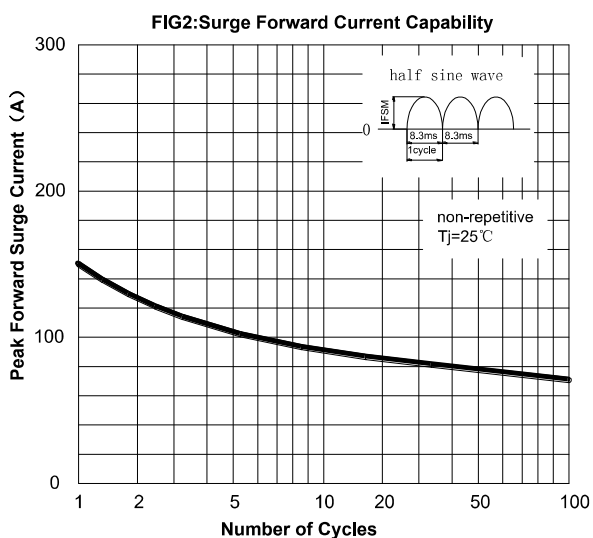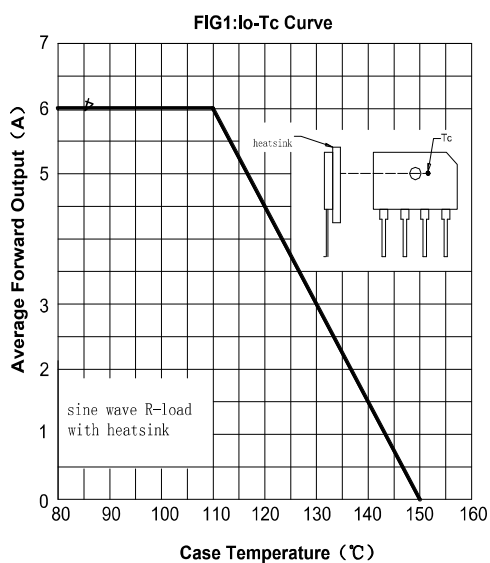

■ Outline Dimensions

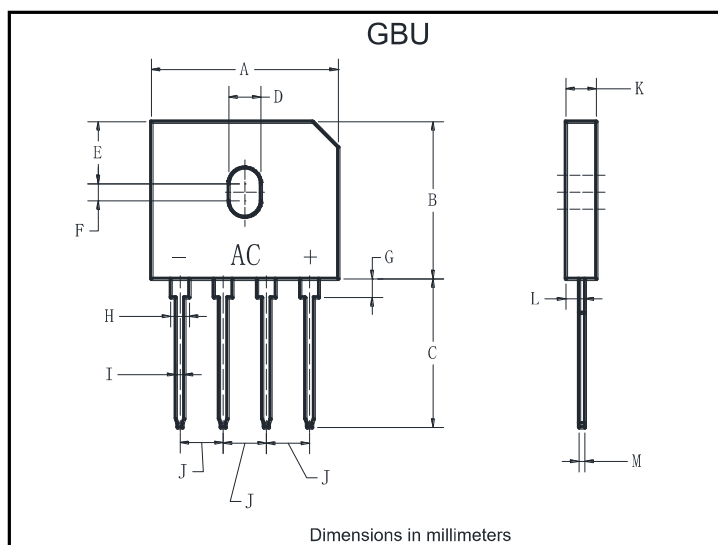

GBU		
Dim	Min	Max
A	21.80	22.30
B	18.30	18.80
C	17.50	18.00
D	3.50	4.10
E	7.40	7.90
F	1.65	2.16
G	1.91	2.54
H	2.06	2.54
I	1.02	1.27
J	4.83	5.33
K	3.30	3.56
L	2.40	2.66
M	0.46	0.56

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [SLKORMICRO](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [DB101-BP](#) [DBA100G](#) [DBA150G](#)
[DBA250G](#) [DBA40G](#) [DBA500G](#) [DBD10G-TM-E](#) [KBPC50-10S](#) [RS405GL-BP](#) [GBU6M](#) [TB102M](#) [MB1510](#) [MB86](#) [TL401G](#) [MDA920A2](#)
[TU602](#) [TU810](#) [MP5010W-BP](#) [MP502-BP](#) [KBPC25-02](#) [DB105-BP](#) [DBB08G-TM-E](#) [DF1510S](#) [MQSPA25](#) [GBU4G-BP](#) [TB354](#) [GBJ2504-](#)
[BP](#) [B1S-G](#) [ABS10-G](#) [GBU6B-BP](#) [GBJ1508-BP](#) [BR5010-G](#) [ABS6-G](#) [MSB15MH-13](#) [LBS10-13](#) [S3PDB60N18](#) [FPIL80](#) [CSB154](#) [BR86DL](#)
[GBPC25-06W](#) [2W04M](#)