



LED



Industrial

### FEATURES AND BENEFITS

3" X 5" X 1.3" Package	190 Watts @ 60C (200 LFM)
240 Watts	160 Watts @ 70C (200 LFM)
EN55015 Class B Conducted EMI	Universal Input 90-264Vac
50°C Ambient Operation With 300 LFM	Meets IEC61000-3-2 Class C For 0% To 100% LED Dimming Applications(1 Watt Input Power To Full Load)
130 Watts @ 70C (Conduction Cooled)	Approved to EN/CSA/IEC/UL62368-1



### MODEL SELECTION

Model Number*	Volts	Maximum Output Current (A)	Minimum Load	Ripple & Noise**	Total Regulation	OVP Threshold
LB240S56K	56V	4.29	0A	560mV pk-pk	±3%	66V± 4V
LB240S48K	48V	5	0A	480mV pk-pk	±3%	56V± 3V
LB240S24K	24V	10	0A	240mV pk-pk	±3%	29V±2.5V

Notes:

- \* For Cold Plate cooling, add option H. Consult the factory for model number availability
- \*\*Ripple is 800mV pk-pk @ -10°C

### INPUT

AC Input	100-240Vac, ±10%, 47-63Hz, 1Ø																
Input Current	Max. 115Vac:2.6A, 230Vac: 1.3A																
Inrush Current	< 55A peak, 264Vac, cold start, turn on at AC zero crossing																
Input Fuses	5A, 250Vac fuse provided on all models																
Earth Leakage Current	<500µA@264Vac, 60Hz, NC																
Efficiency	<table border="0"> <tr> <td>VIN</td> <td>24V</td> <td>48V</td> <td>56V</td> </tr> <tr> <td>(Vac)</td> <td>-----</td> <td>-----</td> <td>-----</td> </tr> <tr> <td></td> <td>115</td> <td>88%</td> <td>90%</td> </tr> <tr> <td></td> <td>230</td> <td>90%</td> <td>92%</td> </tr> </table>	VIN	24V	48V	56V	(Vac)	-----	-----	-----		115	88%	90%		230	90%	92%
VIN	24V	48V	56V														
(Vac)	-----	-----	-----														
	115	88%	90%														
	230	90%	92%														

### OUTPUT

Output Voltage	See Model Chart
Output Power	240 Watts max. with 300 LFM
Turn On Time	Less than 3 sec. @115Vac, Full Load
Hold-up Time	12 mSec min, 115Vac/60Hz
Ripple and Noise	0.5%rms, 1% pk-pk, see chart
Total Regulation	+/- 3% combined line, load and initial setting
Switching Frequency	PFC: Fixed, 65kHz Main Converter: Variable 35 200kHz, 65-70kHz at full load
Transient Response	For 50% to 100% or 100% to 50% load change: <1 mSec, return to 1% of nominal, di/dt <0.2A/uS. Max voltage deviation=3%
Minimum Load	Not required



### PROTECTION

Overvoltage Protection	OVP latch, remove AC input to reset
Short Circuit Protection	Hiccup Mode, auto recovery. A direct hard short may latch off the converter; remove AC input to reset
Overtemperature Protection	Sensing transformer temperature, 165°C latching type, requires input power recycling to reset
Overload Protection	Hiccup Mode

### RELIABILITY

MTBF	438,540 hours Conditions: Standard: Telcordia SR-332 issue 3 Ambient temp: 25c Voltage: 110v Level: 0/1 Environment: Ground, fixed, controlled
------	--

### ISOLATION

Isolation	Input-Output: 3,000Vac Input-Ground: 1,800Vac Output-Ground: 1,500Vac
-----------	---

### SAFETY

Safety Standards	EN/CSA/IEC/UL62368-1
------------------	----------------------

### EMI/EMC COMPLIANCE

Conducted Emissions	EN55015 Class B, FCC Part 15, Subpart B, Class B
Radiated Emissions	EN55022 Class A, FCC Part 15, Subpart B, Class A
Static Discharge Immunity	EN61000-4-2, 6kV Contact Discharge, 8kV air discharge
Radiated RF Immunity	EN61000-4-3, 3V/m
EFT/Burst Immunity	EN61000-4-4, 2kV/5kHz
Line Surge Immunity	EN61000-4-5, 1kV differential, 2kV \ common-mode
Conducted RF Immunity	EN61000-4-6, 3Vrms
Power Frequency Magnetic Field Immunity	EN61000-4-8, 3A/m
Voltage Dip Immunity	EN61000-4-11, 100%, 10ms; 30%, 500ms; 60%, 100ms; Performance Criteria A, A, & A at 58% load
Line Harmonic Emissions	EN61000-3-2, Class A, D For Class C from 1W input power to full load
Flicker Test	EN61000-3-3, Complies (dmax<6%)

### ENVIRONMENT


Operating Temperature	-10°C to +70°C( See Below Chart) Start Up at -40°C
Relative Humidity	5% to 95%, non-condensing
Weight	370g "H" option: TBD
Dimensions	W: 3.0" x L: 5.0" x H: 1.3" "H" option: 3.0"x 6.0" x1.5"
Altitude	Operating: -457 to 3000 m Non-operating: -457 to 12,192m
Storage Temperature	-40°C to +85°C
Vibration	Operating: 0.003g <sup>2</sup> /Hz, 1.5grms overall, 3 axes, 1 hr/axis Non-Operating: 0.026g <sup>2</sup> /Hz, 5.0grms overall, 3 axes, 10 min/axis
Shock	Half-sine, 40 gpk, 10 mS duration, +/- in each of 3 axes, 6 shocks total




Ambient	Cooling Method	Wattage (watts)
50°C	Forced Air, 300 LFM	240
60°C	Forced Air, 200 LFM	190
70°C	Forced Air, 200 LFM	160
70°C with Max. Temperature of primary heat-sink to be held under 85°C	Conduction	130
50°C	Convection	160
40°C with "H" option, Max. Temp of cold plate to be held under 60°C	Conduction	200

The specification above is based on 25°C ambient and where applicable at nominal input voltage of 100 to 240VAC

### MECHANICAL DRAWING

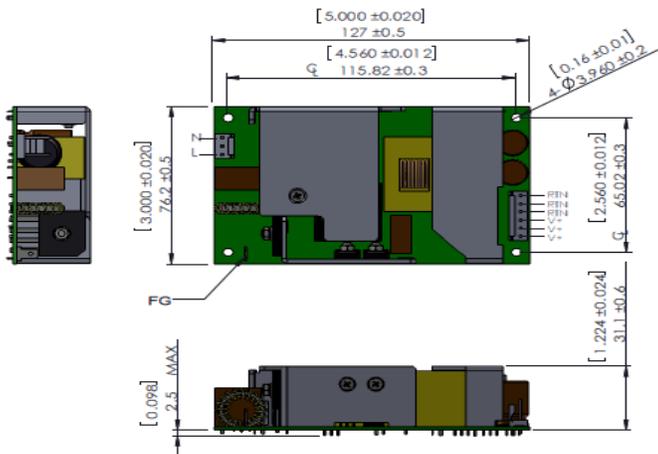

### LB240SXXKH

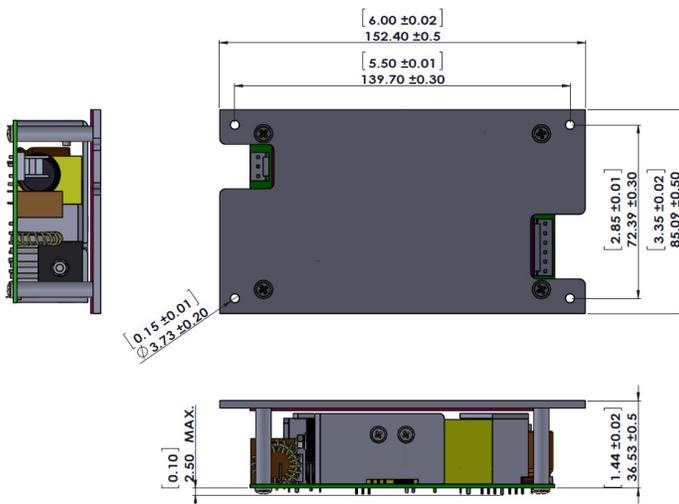

#### Notes

1. All dimensions in inches (mm), tolerances are mentioned for each measurement
2. Mounting holes should be grounded for EMI purposes
3. FG is safety ground connection
4. The power supply requires mounting on Metal standoffs min of 0.20" (5mm) in height



### CONNECTOR INFORMATION

Input Connector J100	Ground (FG)	DC Output Connector J300
PIN 1) AC LINE PIN 2) EMPTY PIN 3) AC NEUTRAL	0.25" FASTON TAB	Term. 1,2,3: RTN Term. 4,5,6: +Vout
Mating Connector: AMP 640250-3 Pins: 640252-2	Mating Connector: Molex 190020001	Mating Connector: AMP 640250-6 Pins: 640252-2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [SL Power](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#)  
[EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#)  
[PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-](#)  
[ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#)  
[LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA](#)  
[FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 50W 200-350ML 170V FLEXC LP](#)  
[SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#)  
[LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC](#)  
[34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#)