

623-0326-H7 Specification

► Mechanical


- ▶ Typical Application: BGA
- ▶ Pitch Range (minimum): 0.5 mm
- ▶ Work Force: 25.3 gf @ 0.38 mm travel
- ▶ Recommended Travel: 0.38 mm
- ▶ Temperature: -55 ~ 150°C
- ▶ Tip Device Side: 4 pt. crown
- ▶ Tip PCB Side: Radius

► Electrical

- ▶ Self Inductance: 1.12 nH
- ▶ Mutual Capacitance: 0.30 pF
- ▶ Bandwidth @ -1 dB: 20 GHz
- ▶ Contact Resistance: < 55 mΩ
- ▶ Current Carrying Capability: 4.0 A

► Plating

- ▶ Plunger Top: Homogenous alloy
- ▶ Plunger Bottom: Gold plated
- ▶ Barrel: Gold plated
- ▶ Spring: Gold plated

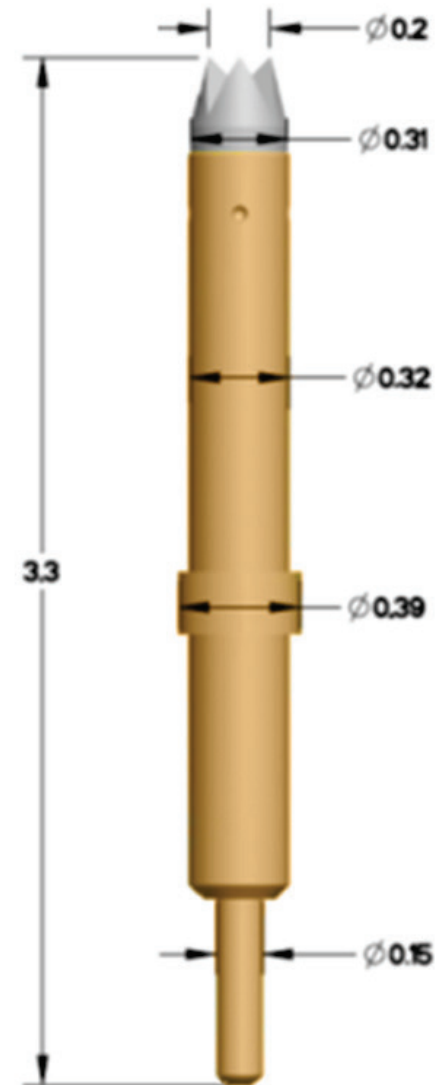

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Contact Probes](#) category:

Click to view products by [Smiths Interconnect](#) manufacturer:

Other Similar products are found below :

[CT5253](#) [S-4-C-5-G S/C](#) [SS-75-B-2.4-G](#) [ICT-100-J-17-G](#) [300106-000-1103](#) [ICT-100-A-8-G S/C](#) [ICT-075-B-10-G-S S/C](#) [S-2-D-8.3-G D/C](#)
[ICT-100-T-8-G S/C](#) [GSS-4-7-G](#) [S-0-B9-2.5-G S/C](#) [SS-40-J-2.4-G D/C](#) [S-0-V-3.7-G S/C](#) [SX-1-U-6.6-G D/C](#) [SS-50-J-5.1-G S/C](#) [SS-40-J-1.8-](#)
[G-N/L D/C](#) [SS-3-7-G S/C W/HOLE .373 OAL](#) [SS-10-7-G S/C W/HOLE .373 OAL](#) [SS-1-7-G S/C W/HOLE .385 OAL](#) [SHE-5-H-18.7-G](#)
[SHE-5-B-18.7-G](#) [SHE-3-A-7-G](#) [SH-4-A-10-G S/C](#) [101057-001-952](#) [S-50C-HS-4.3-DG-S](#) [S-5-F-8-G S/C SS SPGS](#) [S-5-F-16.4-G S/C](#) [S-4-K-](#)
[5-G S/C](#) [S-4-E-5-D S/C](#) [S-2-J-8.3-G D/C](#) [S-2-E-10-D D/C](#) [S-2-A-10-D D/C](#) [S-100-UR-5.5-G-S](#) [S-100-J-17-G](#) [S-100-HK-10-G](#) [S-100-D-6.7-](#)
[G](#) [S-100-B-3.5-G-S](#) [S-100-B-3.5-G](#) [S-1-U-6.6-D D/C .670 OAL](#) [S-1-A-6.6-D D/C .670 OAL](#) [S-075-S-3.8-RT](#) [S-075-J-3-G](#) [S-075-B-3-G](#) [S-](#)
[075-A-7-G](#) [S-00-U-1.6-G D/C SS SPG](#) [S-00-ES-2-G D/C](#) [S-0-U-3.7-D S/C](#) [RX-100-SC](#) [RH-100-WW-429](#) [QUAD-0C-12-1](#)