





# Operation:DIP3+2PIN/卧式二档&中型拨动开关 [柄长可定制]







### LTEM NO.:SK-12D02-VG□

(Series)

(L8.6×W4.4×H4.70 SLIDE-SWITCH)

表面插装 DIP

侧向操作



### **Technical parameter**


PROJECT	LEVEL	A[better product]	<b>B</b> [average product]
	Contact Rating	0.3A,	24V DC
Electrical Initial Contact Resistance		50m $Ω$ max.	
Properties	Insulation Resistance	n Resistance 100MΩ min.500V DC Skey/PD: 100MΩ min.300V DC	
	Withstand Voltage	300V AC for 1 minute	250 V AC for 1 minut
Durable Per	There No Load	15,000 Cycles	10,000 Cycles
Durable Fer	Rated Load	12,000 Cycles	8,500 Cycles
	Sterage temp.	-25℃~+75℃(Operating Temp:	
Operating Force		2. 6N. (1N. =100gram-force)	
Heat Rrsistance		IR Reflow: 255°C, 5sec. Manual: 350°C, 3sec.	


Material declaration			
No.	NAME	Description	
① A	盖板	钢带(镀镍) t=0.40	
2 B	拨柄	POM (Black)热塑性塑料	
3 C	基座	酚醛脂板 PHENOLIC RESIN	
4 D	端子	镀银&H62 黄铜带 BRASS STRIP	
⑤ E	嵌件	镀银&H62 黄铜带 BRASS STRIP	
<b>®</b> F	弹片	不锈钢线 STEEL WIRE	

可靠 STABILIZE 適合環保 RoHS

精密部品 NICETY

### Unit:mm

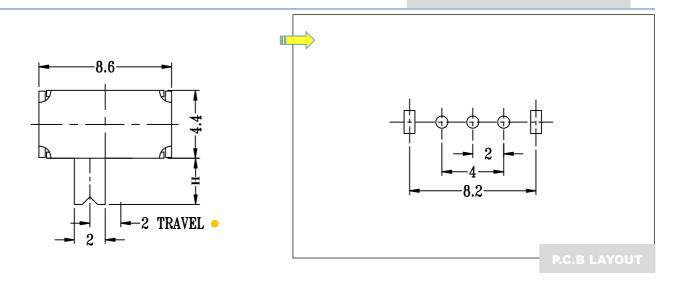

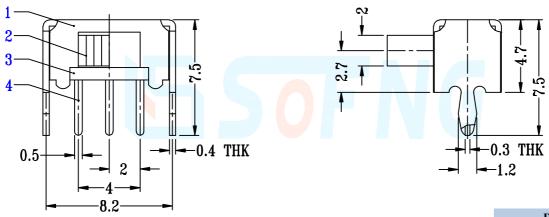

DIM H

可定制柄長



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for sofng manufacturer:

Other Similar products are found below:

SNO-1307-T MC-313D TS-1102N-4326 TS-1109G-7026 TS-1109G-3826 SMO-1504 SNO-019 MC-324 SMO-1511B-P6 SMO-1507-P8

U30-04 SMO-1510 MC-108C TS-1101V-5026 TS-1101V-8026 TS-1103-4316 TS-1103-4526 TS-1157-2526 TS-1157-3126 TS-1807C
2516 TS-1807R-2016 TS-1807R-2526 MC-313F-14 MU-221 SMO-002F-T7 TS-1817A-5026 TS-1814-16 TS-1814-26 DC-036A-T20 TF
004 SMO-1509 TF-008 SNO-1309-T SMO-014 MC-335 CZ-014 CZ-012 HDMI-019B TS-1187F-1526 PCIE-52P70H TS-1109S-3816

HDMI-519S SIM-015-C TS-1103T-16 SIM-019B-P6 DC-044-T20 TS-1102N-5026 SIM-010-R USB-101 MC-101CD