

脚型 Lead style

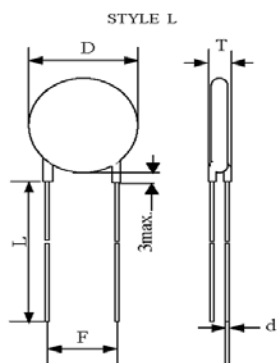


Figure 1-2

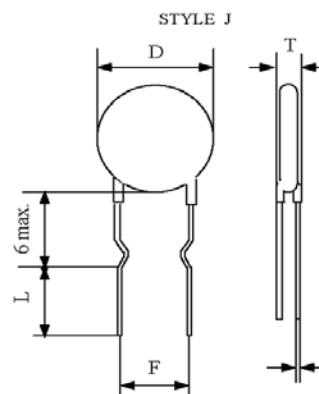


Figure 1-3

规格Specification

SHM 产品代码 SHM Part No.	额定电压 Rated voltage (KV)	标称容量 Nominal capacitance (pF)	电容量允许 偏差范围 Tolerance (%)	温度特性 Temperature Characteristic	产品尺寸(mm)				
					直径 Dmax. (mm)	厚度 Tmax (mm)	引线 间距 F(mm)	引线直径 d (mm)	散件/ 编带
DCC101J20SL F6FJ5A0	50VDC	100	±5%	SL	5.0	3.0	5.0	0.55±0.05	编带
DCC101J26COHF6FJ5A0	50VDC	100	±5%	COH	6.5	3.0	5.0	0.55±0.05	编带
DCC121J20SL F6FJ5A0	50VDC	120	±5%	SL	5.0	3.0	5.0	0.55±0.05	编带
DCC200J20COHF6FJ5A0	50VDC	20	±5%	COH	5.0	3.0	5.0	0.55±0.05	编带
DCC220J20COHF6FJ5A0	50VDC	22	±5%	COH	5.0	3.0	5.0	0.55±0.05	编带
DCC220K20COHF56L5A0	50VDC	22	±10%	COH	5.0	3.0	5.0	0.48±0.05	散件
DCC220K20COHF58L5A0	50VDC	22	±10%	COH	5.0	3.0	5.0	0.48±0.05	散件
DCC221J20SL F6FJ5A0	50VDC	220	±5%	SL	5.0	3.0	5.0	0.55±0.05	编带
DCC270J20COHF6FJ5A0	50VDC	27	±5%	COH	5.0	3.0	5.0	0.55±0.05	编带
DCC300J20COHF6FJ5A0	50VDC	30	±5%	COH	5.0	3.0	5.0	0.55±0.05	编带
DCC331J22SL F6FJ5F0	50VDC	330	±5%	SL	5.5	3.0	5.0	0.55±0.05	编带
DCC391J22SL F6FJ5A0	50VDC	390	±5%	SL	5.5	3.0	5.0	0.55±0.05	编带
DCC470J20COHF6FJ5A0	50VDC	47	±10%	COH	5.0	3.0	5.0	0.55±0.05	编带
DCC470J20SL F6FJ5A0	50VDC	47	±5%	SL	5.0	3.0	5.0	0.55±0.05	编带



DCC471J26SL F6FJ5A0	50VDC	470	±5%	SL	6.5	3.0	5.0	0.55±0.05	编带
DCC509D20COHF6FJ5A0	50VDC	5	±0.5pF	COH	5.0	3.0	5.0	0.55±0.05	编带
DCC560J20COHF6FJ5A0	50VDC	56	±5%	COH	5.0	3.0	5.0	0.55±0.05	编带
DCC561J34SL F6FJ5A0	50VDC	560	±5%	SL	8.5	3.0	5.0	0.55±0.05	编带
DCC820J20SL F6FJ5A0	50VDC	82	±5%	SL	5.0	3.0	5.0	0.55±0.05	编带
DCC820J26COHF6FJ5A0	50VDC	82	±5%	COH	6.5	3.0	5.0	0.55±0.05	编带

电性能指标 Electrical Performance

序号 No.	项目名称 Item		技术要求 Specification	
1	容量和误差 C		@25℃， 1 MHz and 1 Vrms	参照规格表 See the specification
2	品质因素 Q		@25℃， 1 MHz and 1 Vrms	Q≥400+20Cr (Cr<30pF) Q≥1000 (Cr≥30pF)
3	绝缘电阻 IR		@50 VDC,60S	10000MΩmin
4	耐电压 Rate Voltage	50VDC	300%额定电压	无击穿或飞弧。 No visible damage
5	温度特性 temperature characteristic	SL		+ 140~-1000 (10 ⁻⁶ /℃)
		COH		0±60*10 ⁻⁶ /℃
		Y5P		±10%
		Y5U		+22% to -56%
		Y5V		+22% to -82%


标志 Marking

例如 e. g

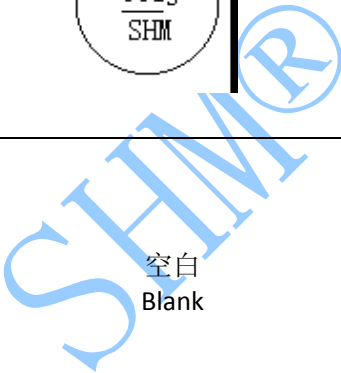	22#号产品以下 ≤ 22#	26#号产品以下 =26#	30#产品以上 ≥30#
正面 Front			
反面 Back	空白 Blank	空白 Blank	

编带样式 Taping style

TAPING STYLE F

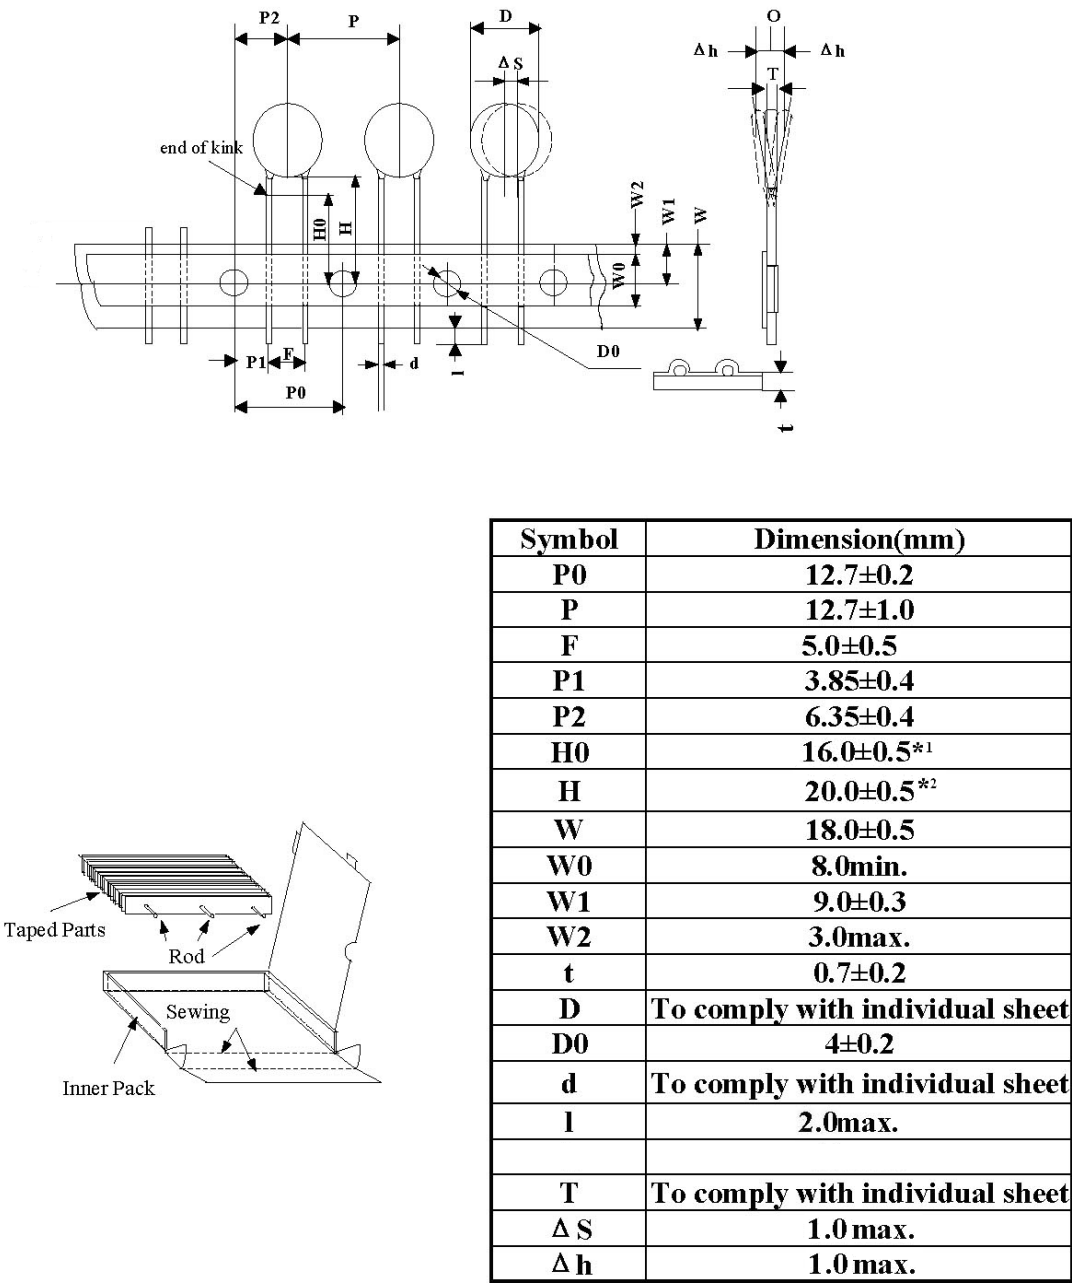

1. *1 打弯脚型以H0为准。
For kink lead only.

2. *2 直脚产品以H为准。
For straight lead only.

Figure 2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ceramic Disc Capacitors](#) ***category:***

Click to view products by [South HongMing](#) ***manufacturer:***

Other Similar products are found below :

[5AU100JCECA](#) [5AU220JCGCA](#) [5AU560JCJCA](#) [DEF2CLH020CA3B](#) [HCU180KBCDRTKR](#) [432202101621](#) [DEF2CLH030CJ3B](#)
[101GHR102K](#) [W1X223MCVCF0KR](#) [CC-100N](#) [564RBA142EH472MA03](#) [NCD102K1KVY5FF](#) [NCD101K1KVY5FF](#) [NCD103M1KVZ5UF](#)
[NCD151K1KVY5FF](#) [NCD331K1KVY5FF](#) [440LT68AP-R](#) [AOL-1502-02](#) [NCD103M1KVZ5UJTBF](#) [DEF2CLH040CN3A](#)
[DEF2CLH080DA3B](#) [0811-040-X7R0-102K](#) [8903D0](#) [90410-10](#) [YV101103Z060HAND5P](#) [SL102101J060BAND5P](#) [ZU501103M090B20C6P](#)
[ZU102103M100X05B0P](#) [YP102271K050B20C6P](#) [YP102391K050BAND5P](#) [YP501101K040BAND5P](#) [ZU102103M100BAND5H](#)
[YP102681K060B20C6P](#) [YP501121K040B20C6P](#) [SL102181J070HAND5P](#) [YP501471K040B20C6P](#) [SL102151J070HAND5P](#)
[YP501102K050HAND5P](#) [ZU501102M050B20C6P](#) [YP501472K100B20C6P](#) [ZU102103M100B20C0P](#) [YV500223Z080HAND5P](#)
[CC1H220KA1EDCH4B1100](#) [SL500330J040B20C2P](#) [SL501510J050B20C6P](#) [SL102221J080HAND5P](#) [YP500103M100HAND5P](#)
[YP102101K050B20C5B](#) [YP500472K070HAND5P](#) [SL102101J060HAND5H](#)