

Spectrum Control has developed a new family of ultra-miniature high Q RF filters in surface mount, ultra-compact packages. Available in frequencies from 0.5 to 10 GHz, these filters are ideal for use in lowpass, highpass, bandpass, bandstop, and diplexer applications.




The new High Q RF filter family from Spectrum Control achieves dramatic size reduction while maintaining high performance

Applications such as aerospace and defense are driving demand for high quality surface mount RF components to reduce the size and cost of RF systems.

Spectrum Control has been a leading provider of high quality, RF filters for A&D applications for more than 40 years. We have applied our RF filtering expertise to deliver a dramatic reduction in filter size while delivering exceptional performance. MMG series filters deliver high selectivity with low insertion loss and temperature stability in an ultra-compact form factor.

To achieve this size and performance breakthrough we have employed a novel manufacturing approach using integrated passive devices in glass. This 3D process allows us to build unique solenoid inductor structures that offer superior Q performance from 0.5 to 10 GHz compared to other filter technologies of similar size. The wafer-scale process also provides an extremely high correlation between filter simulations and the manufactured product giving us high predictability for custom filters. The performance and quality are also highly consistent, run-to-run.

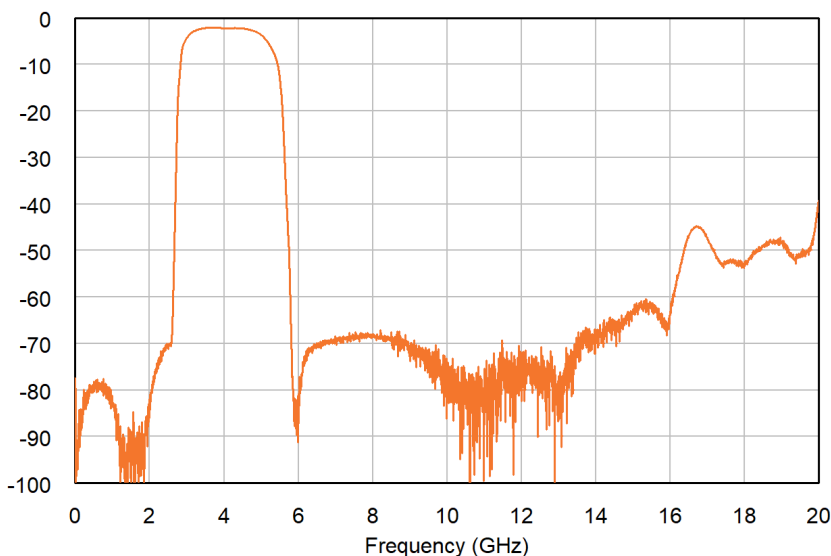

Performance graph above is typical of all MMG filters in the family.
See following pages for the performance data for all released filters.

Specifications

MMG_4000_2000_B Filter 3-5 GHz Band

- Passband return loss of 15 dB typ.
- Passband VWSR 1.4:1 typ.
- Mid-band insertion loss of 2.2 dB
- Group delay of 1.0 ns nominal over -55 to 125 degrees C
- >70 dB @ DC to 2.5 GHz
- >60 dB @ 5.8 to 15 GHz
- Physical dimensions: 3.5 mm x 6.5 mm

MMG – 4000-2000-B

Parameter	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Nominal	Max	Unit
Passband Insertion Loss	3.0	5.0	2.2	2.6	3.75	dB
Passband Return Loss	3.0	5.0	14	18		dB
Stopband Rejection	0	2.5	60	65		dB
Stopband Rejection	5.8	15	60	65		dB
Stopband Rejection	15	20	45	55		dB
Group Delay			0.8	1	2	nS
Power Handling					30	dBm
Impedance				50		Ω
Temperature			-55	25	125	° C

MMG – 3750-2000-B

Parameter	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Nominal	Max	Unit
Passband Insertion Loss	2.75	4.75	2.5	2.8	4.0	dB
Passband Return Loss	2.75	4.75	14	18		dB
Stopband Rejection	0	2.25	55	60		dB
Stopband Rejection	5.25	15	60	65		dB
Stopband Rejection	15	20	45	55		dB
Group Delay			0.8	1	2	nS
Power Handling					30	dBm
Impedance				50		Ω
Temperature			-55	25	125	° C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Amplifier IC Development Tools](#) **category:**

Click to view products by [Spectrum](#) **manufacturer:**

Other Similar products are found below :

[MIOP 42109](#) [A5M34TG140TC-EVB](#) [MMG-0001-EVK](#) [MMG-0007-EVK](#) [MMG-0019-EVK](#) [MMG-0020-EVK](#) [3006](#) [AD8410ARM-10-EVALZ](#) [EVAL-ADA4620-1ARZ](#) [EVAL-ADA4620-2ARZ](#) [EK87](#) [ISL28634EV2Z](#) [ADM01104](#) [ARD00354](#) [MIKROE-2555](#) [MIKROE-3505](#) [MIKROE-4124](#) [MIKROE-4383](#) [MIKROE-1915](#) [MIKROE-4800](#) [A5M36TG140TC-EVB](#) [BD14222G-EVK-001](#) [BD14221G-EVK-001](#) [BD14211G-EVK-001](#) [BD14220G-EVK-001](#) [BD14232FVJ-EVK-001](#) [BD14230FVJ-EVK-001](#) [BD14231FVJ-EVK-001](#) [TLR1901GXZ-EVK-001](#) [TLR377GYZ-EVK-001](#) [710-0011-01](#) [SI8920ISO-KIT](#) [BOB-09816](#) [BOB-14874](#) [X-NUCLEO-IKA01A1](#) [DEM-OPA-SO-2C](#) [LMH730121/NOPB](#) [LMH9235RRLEVM](#) [THS6301RSAEVM](#)