

Socket outlet combination

AKi 14-3M

This product is outdated. To the successor product: <https://www.spelsberg.com/p/73020201>



AKi 14-3M

Socket outlet combination

CUSTOMIZABLE

Productnumber: 73913201

Dimensions: 300 x 450 x 142 mm

Socket outlet combination, protection class IP44, ready for connection, according to EN 61439-3, high mechanical strength, temperature-resistant, can be combined

Cable insertions:

Top: Pre-embossing 15 x M20, 2 x M20/25, 1 x M32/40

Bottom: Pre-embossing 15 x M20, 2 x M20/25, 1 x M32/40

Left: Pre-embossing 12 x M20, 3 x M25/32

Right: Pre-embossing 12 x M20, 3 x M25/32

equipped with:

- 2 x Miniature circuit breaker B16A, 1-pin
- 2 x Miniature circuit breaker C 16 A, 3p
- 4 x SCHUKO® plug socket (on front), 230V
- 2 x CEE plug socket outlet (on front) 16A, 400V

Accessories supplied:

Double-membrane seals: 1x M20, 1x M25, 1x M32, Attachment bushes: 1x M40, sealing plugs, masking and labelling strips



Technical Data

Built-in devices

Miniature circuit breaker B16A, 1-pin:	2
Miniature circuit breaker C 16 A, 3p:	2
SCHUKO® plug socket (on front), 230V:	4
CEE plug socket outlet (on front) 16A, 400V:	2

electrical characteristics

Rated operating voltage AC:	400 V
Rated insulation voltage AC:	400 V
Protection class:	II
Type of protection:	IP44
Number of N-potentials:	1
Number of rows:	0
Number of modules per row:	14
with N terminal:	yes
with PE terminal:	yes

Colours

Base unit colour:	grey
Cover colour:	grey

Dimensions

Width:	300 mm
Length:	450 mm
Height:	142 mm

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	V2

Material characteristics

Glow-wire flammability according to EN 60695-2-11:	850 °C
Industry quality:	yes

mechanical properties

Type of fastening:	Wall mounting
Impact strength:	IK08


Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-35 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C
Installation location:	protected outdoor areas

Material

Base unit material:	Polycarbonate, glass-fibre reinforced
Cover material:	Polycarbonate, glass-fibre reinforced
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced
Hinged window material:	Polycarbonate

Cable gland

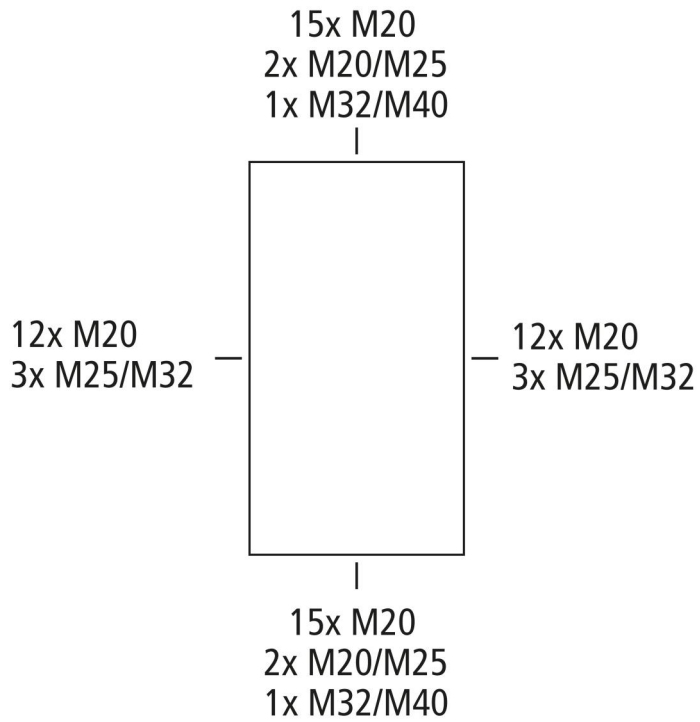

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Mounting Fixings](#) category:

Click to view products by [Spelsberg](#) manufacturer:

Other Similar products are found below :

[5912235-1 REV](#) - [71-344699-4S](#) [7717-8DAP](#) [85054GBEPR](#) [HD7-1](#) [14320](#) [NT20SATT01](#) [89078GBESR](#) [9150700000](#) [BACC47CN2S](#)
[ELXA051G1](#) [1453315-11](#) [71-148608-2S](#) [H373247-15](#) [85054GBESR](#) [860099-1](#) [DM 330](#) [197-007](#) [BRKT-ND](#) [197-003](#) [1960004544](#)
[CF81GHZMHDW](#) [61104-01](#) [20011292N025050000](#) [DVA.4-40-20-M8-23-70](#) [GN 2277-ALN-20-K-30-A](#) [GN 2279-ALS-14-K-30-A](#) [GN](#)
[2280-ALN-20-K-30](#) [GN 237-ZD-60-60-C-SR](#) [KALM-16](#) [189888-2](#) [G4-PEM-NUTS](#) [89309-00](#) [KJE-POGES 100K1](#) [M050NAHF](#) [POBW](#)
[150/20K](#) [451928](#) [452413](#) [451521](#) [TPE-POB 100S](#) [3.ST27-1.001](#) [3.STZH3.001](#) [BPPB 0801 2100H](#) [GN 1362-NI-80-80-A-BL](#) [GN 1364-NI-](#)
[105-50-B-BL](#) [GN 1364-NI-140-50-B-BL](#) [GN 136-NI-120-60-B](#) [GN 136-NI-50-50-A](#) [GN 136-NI-50-50-B](#) [GN 136-NI-50-50-C](#)