


- Features:
- Thin Film Technology for precision and stability
 - Excellent power to size ratio
 - Exhibits good pulse power characteristics
 - RoHS compliant, lead-free and halogen-free




Electrical Specifications									
Type/Code	Package Size	Power Rating (Watts) @ 70°C	Maximum Working Voltage ⁽¹⁾	Maximum Overload Voltage	Resistance Temperature Coefficient	Ohmic Range (Ω) and Tolerance			
						0.1%	0.5%	1%	5%
MLF18	0102	0.125W	150V	300V	±15 ppm/°C	100 - 56K			-
					±25 ppm/°C	100 - 82K	49.9 - 200K	49.9 - 390K	-
					±50 ppm/°C	-	40 - 1M		-
					±100 ppm/°C	-	40 - 1M		-
MLFM15	0102	0.2W	200V	400V	±15 ppm/°C	100 - 56K			-
					±25 ppm/°C	100 - 82K	49.9 - 200K	49.9 - 390K	-
					±50 ppm/°C	-	40 - 1M		-
					±100 ppm/°C	-	40 - 1M		-
MLF14	0204	0.25W	200V	400V	±10 ppm/°C	10 - 20K			-
					±15 ppm/°C	10 - 300K			-
					±25 ppm/°C	10 - 1M		4.02 - 4.7M	-
					±50 ppm/°C	10 - 1M	1 - 1M	0.2 - 10M	-
					±100 ppm/°C	-	0.1 - 10M		-
	Jumper: 2A	-	0Ω(<15mΩ)			-			
MLFM25	0204	0.4W	200V	400V	±15 ppm/°C	10 - 100K			-
					±25 ppm/°C	10 - 1M		4.02 - 1M	-
					±50 ppm/°C	10 - 1M	1 - 1M	0.2 - 1M	-
					±100 ppm/°C	-	0.1 - 1M		-
MLF12	0207	0.5W	300V	600V	±10 ppm/°C	10 - 20K			-
					±15 ppm/°C	10 - 300K			-
					±25 ppm/°C	10 - 1M		4.02 - 4.7M	-
					±50 ppm/°C	10 - 1M	1 - 1M	0.2 - 10M	-
					±100 ppm/°C	-	0.1 - 10M		-
	Jumper: 4A	-	0Ω(<15mΩ)			-			
MLFM1	0207	1W	350V	700V	±15 ppm/°C	49.9 - 100K			-
					±25 ppm/°C	10 - 1M		4.02 - 1M	-
					±50 ppm/°C	10 - 1M	1 - 1M	0.2 - 10M	-
					±100 ppm/°C	-	0.1 - 10M		-

Note: ⁽¹⁾ Lesser of $\sqrt{P \cdot R}$ or maximum working voltage

Power Derating Curve:

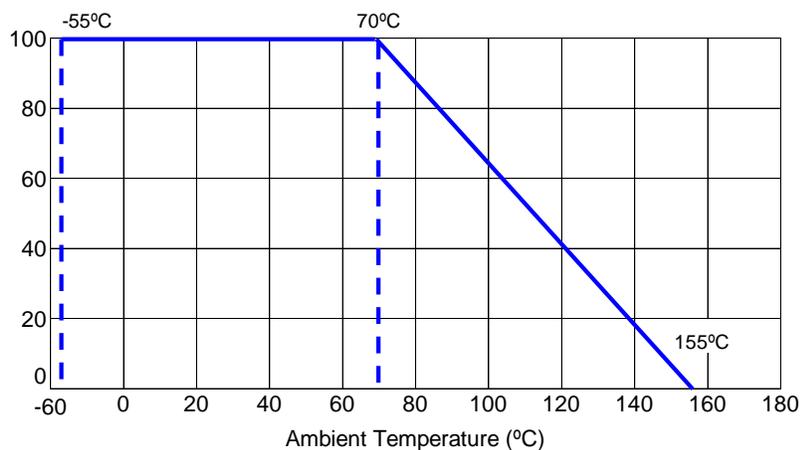


Mechanical Specifications

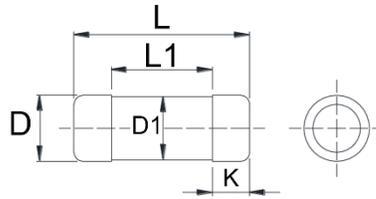


Type/Code	Weight (g) (1000 pieces)	L Body Length	L1 (min.) Inner Body Length	D Body Diameter	D1 Middle Body Dia.	K Termination	Unit
MLF18	7.7	0.087 ± 0.004 2.20 ± 0.10	0.043 1.10	0.043 ± 0.004 1.10 ± 0.10	0.043 +0/-0.006 1.10 +0/-0.15	0.018 ± 0.002 0.45 ± 0.05	inches mm
MLFM15	7.7	0.087 ± 0.004 2.20 ± 0.10	0.043 1.10	0.043 ± 0.004 1.10 ± 0.10	0.043 +0/-0.006 1.10 +0/-0.15	0.018 ± 0.002 0.45 ± 0.05	inches mm
MLF14	18.7	0.138 ± 0.008 3.50 ± 0.20	0.138 3.50	0.055 ± 0.006 1.40 ± 0.15	0.055 +0/-0.008 1.40 +0/-0.20	0.031 ± 0.004 0.80 ± 0.10	inches mm
MLFM25	18.7	0.138 ± 0.008 3.50 ± 0.20	0.138 3.50	0.055 ± 0.006 1.40 ± 0.15	0.055 +0/-0.008 1.40 +0/-0.20	0.031 ± 0.004 0.80 ± 0.10	inches mm
MLF12	80.9	0.232 ± 0.008 5.90 ± 0.20	0.232 5.90	0.087 ± 0.008 2.20 ± 0.20	0.087 +0/-0.008 2.20 +0/-0.20	0.051 ± 0.004 1.30 ± 0.10	inches mm
MLFM1	80.9	0.232 ± 0.008 5.90 ± 0.20	0.232 5.90	0.087 ± 0.008 2.20 ± 0.20	0.087 +0/-0.008 2.20 +0/-0.20	0.051 ± 0.004 1.30 ± 0.10	inches mm

Reel Specifications

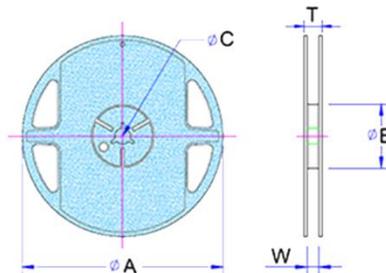

Type/Code	φA	φB	φC	W	T	Unit
MLF18	7.028 ± 0.059 178.50 ± 1.50	2.362 ± 0.039 60.00 ± 1.00	0.512 ± 0.008 13.00 ± 0.20	0.354 ± 0.020 9.00 ± 0.50	0.492 ± 0.020 12.50 ± 0.50	inches mm
MLFM15	7.028 ± 0.059 178.50 ± 1.50	2.362 ± 0.039 60.00 ± 1.00	0.512 ± 0.008 13.00 ± 0.20	0.354 ± 0.020 9.00 ± 0.50	0.492 ± 0.020 12.50 ± 0.50	inches mm
MLF14	7.028 ± 0.059 178.50 ± 1.50	2.362 ± 0.039 60.00 ± 1.00	0.512 ± 0.008 13.00 ± 0.20	0.354 ± 0.020 9.00 ± 0.50	0.492 ± 0.020 12.50 ± 0.50	inches mm
MLFM25	7.028 ± 0.059 178.50 ± 1.50	2.362 ± 0.039 60.00 ± 1.00	0.512 ± 0.008 13.00 ± 0.20	0.354 ± 0.020 9.00 ± 0.50	0.492 ± 0.020 12.50 ± 0.50	inches mm
MLF12	7.028 ± 0.059 178.50 ± 1.50	2.362 ± 0.039 60.00 ± 1.00	0.512 ± 0.020 13.00 ± 0.50	0.512 ± 0.020 13.00 ± 0.50	0.610 ± 0.020 15.50 ± 0.50	inches mm
MLFM1	7.028 ± 0.059 178.50 ± 1.50	2.362 ± 0.039 60.00 ± 1.00	0.512 ± 0.020 13.00 ± 0.50	0.512 ± 0.020 13.00 ± 0.50	0.610 ± 0.020 15.50 ± 0.50	inches mm


Packaging Specifications - Embossed Plastic Tape

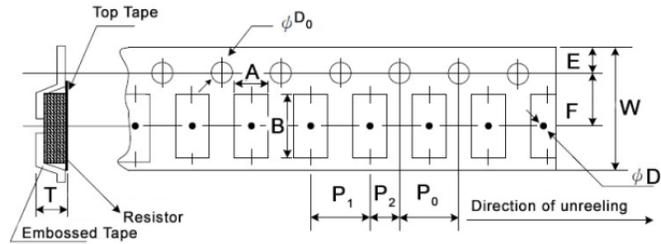

Type/Code	A	B	W	E	F	P0	Unit
MLF18	0.051 ± 0.004	0.094 ± 0.004	0.315 ± 0.004	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	inches
	1.30 ± 0.10	2.40 ± 0.10	8.00 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	mm
MLFM15	0.051 ± 0.004	0.094 ± 0.004	0.315 ± 0.004	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	inches
	1.30 ± 0.10	2.40 ± 0.10	8.00 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	mm
MLF14	0.061 ± 0.004	0.144 ± 0.004	0.315 ± 0.004	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	inches
	1.55 ± 0.10	3.65 ± 0.10	8.00 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	mm
MLFM25	0.061 ± 0.004	0.144 ± 0.004	0.315 ± 0.004	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	inches
	1.55 ± 0.10	3.65 ± 0.10	8.00 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	mm
MLF12	0.094 ± 0.004	0.242 ± 0.004	0.472 ± 0.004	0.069 ± 0.004	0.217 ± 0.002	0.157 ± 0.004	inches
	2.40 ± 0.10	6.15 ± 0.10	12.00 ± 0.10	1.75 ± 0.10	5.50 ± 0.05	4.00 ± 0.10	mm
MLFM1	0.094 ± 0.004	0.242 ± 0.004	0.472 ± 0.004	0.069 ± 0.004	0.217 ± 0.002	0.157 ± 0.004	inches
	2.40 ± 0.10	6.15 ± 0.10	12.00 ± 0.10	1.75 ± 0.10	5.50 ± 0.05	4.00 ± 0.10	mm

Type/Code	P1	P2	D0	D1	T	Unit
MLF18	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.035 min.	0.059 ± 0.004	inches
	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	0.90 min.	1.50 ± 0.10	mm
MLFM15	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.035 min.	0.059 ± 0.004	inches
	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	0.90 min.	1.50 ± 0.10	mm
MLF14	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.035 min.	0.071 ± 0.004	inches
	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	0.90 min.	1.80 ± 0.10	mm
MLFM25	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.035 min.	0.071 ± 0.004	inches
	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	0.90 min.	1.80 ± 0.10	mm
MLF12	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.055 min.	0.106 ± 0.004	inches
	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	1.40 min.	2.70 ± 0.10	mm
MLFM1	0.157 ± 0.004	0.079 ± 0.002	0.059 ± 0.004	0.055 min.	0.106 ± 0.004	inches
	4.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	1.40 min.	2.70 ± 0.10	mm

Recommended Pad Layout




Type/Code	A	B	C	Unit
MLF18	0.039	0.031	0.059	inches
	1.00	0.80	1.50	mm
MLFM15	0.039	0.031	0.059	inches
	1.00	0.80	1.50	mm
MLF14	0.063	0.047	0.063	inches
	1.60	1.20	1.60	mm
MLFM25	0.063	0.047	0.063	inches
	1.60	1.20	1.60	mm
MLF12	0.118	0.067	0.094	inches
	3.00	1.70	2.40	mm
MLFM1	0.118	0.067	0.094	inches
	3.00	1.70	2.40	mm

Performance Characteristics			
Test	Test Method	Test Condition	Test Specification
Temperature Coefficient of Resistance (T.C.R.)	JIS-C-5201-1 4.8 IEC-60115-1 4.8	-55°C ~ +125°C, 25°C is the reference temperature	As specified
Short Time Overload	JIS-C-5201-1 4.13 IEC-60115-1 4.13	RCWV*2.5 or max. overload voltage whichever is lower for 5 seconds	0204/0207: ± (0.15% + 0.05Ω) 0102: ± (0.5% + 0.05Ω)
Insulation Resistance	JIS-C-5201-1 4.6 IEC-60115-1 4.6	Max. overload voltage for 1 minute	≥10G
Endurance	JIS-C-5201-1 4.25 IEC-60115-1 4.25.1	70 ± 2°C, RCWV for 1000 hours with 1.5 hour "ON" and 0.5 hour "OFF"	0204/0207: ± (0.15% + 0.05Ω) 0102: ± (0.5% + 0.05Ω)
Damp Heat with Load	JIS-C-5201-1 4.24 IEC-60115-1 4.24	40 ± 2°C, 90~95% R.H., RCWV for 1000 hours with 1.5 hour "ON" and 0.5 hour "OFF"	0204/0207: ± (1.0% + 0.05Ω) 0102: ± (1.5% + 0.05Ω)
Dry Heat	JIS-C-5201-1 4.23 IEC-60115-1 4.23.2	at +155°C for 1000 hours	0204/0207: ± (1.0% + 0.05Ω) 0102: ± (1.5% + 0.05Ω)
Bending Strength	JIS-C-5201-1 4.33 IEC-60115-1 4.33	Bending once for 5 seconds with 2mm	± (0.5% + 0.05Ω)
Solderability	JIS-C-5201-1 4.17 IEC-60115-1 4.17	245 ± 5°C for 3 seconds	95% min. coverage
Resistance to Soldering Heat	JIS-C-5201-1 4.18 IEC-60115-1 4.18	260 ± 5°C for 10 seconds	± (0.5% + 0.05Ω)
Voltage Proof	JIS-C-5201-1 4.7 IEC-60115-1 4.7	1.42 times max. operating voltage for 1 minute	No breakdown or flashover
Leaching	JIS-C-5201-1 4.18 IEC-60068-2-58 8.2.1	260 ± 5°C for 30 seconds	Individual leaching area ≤ 5% Total Leaching area ≤ 10%
Rapid Change of Temperature	JIS-C-5201-1 4.19 IEC-60115-1 4.19	-55°C to +155°C, 5 cycles	± (0.5% + 0.05Ω)

RCWV (rated continuous working voltage) = $\sqrt{P \cdot R}$ or max. operating voltage whichever is lower.


Storage temperature: 25 ± 3°C, humidity < 80% R.H.

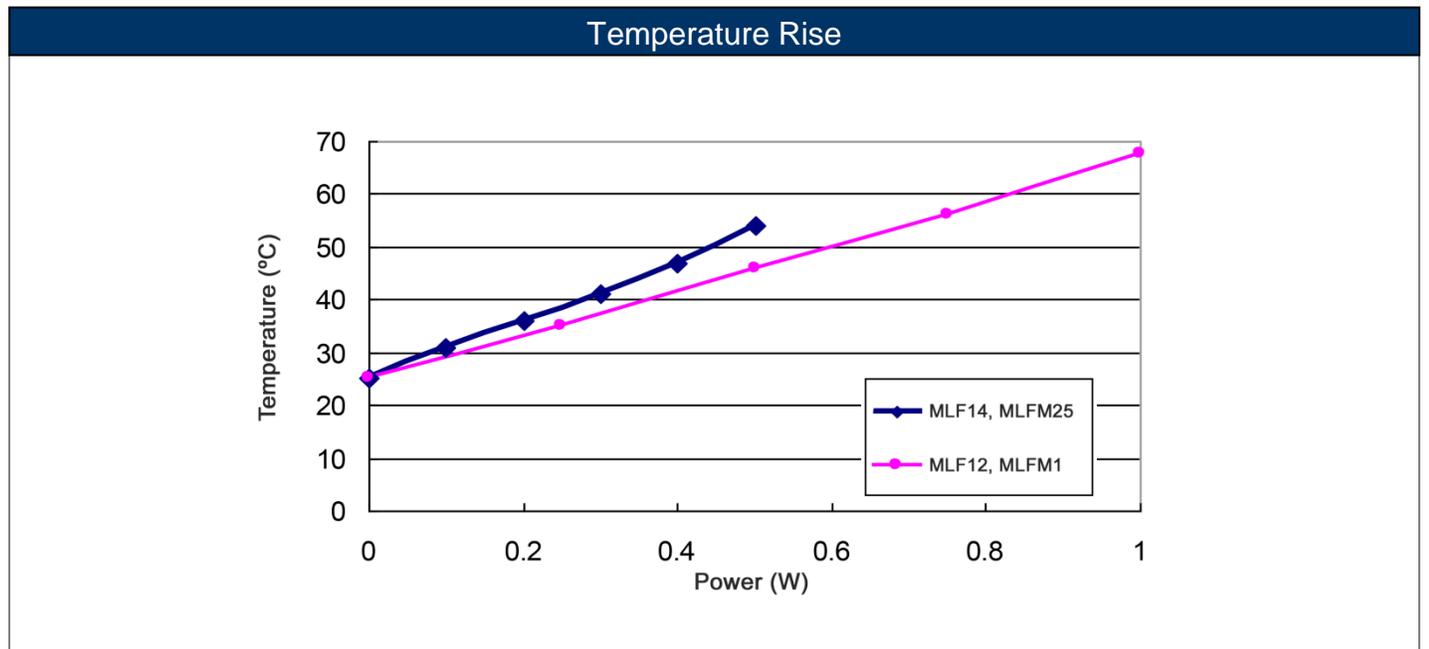


Pulse withstanding capacity

The single impulse graph is the result of 50 impulses of rectangular shape applied at one-minute intervals. The limit of acceptance was a shift in resistance of less than 1% from the initial value. The power applied was subject to the restrictions of the maximum permissible impulse voltage graph shown.

Single Pulse

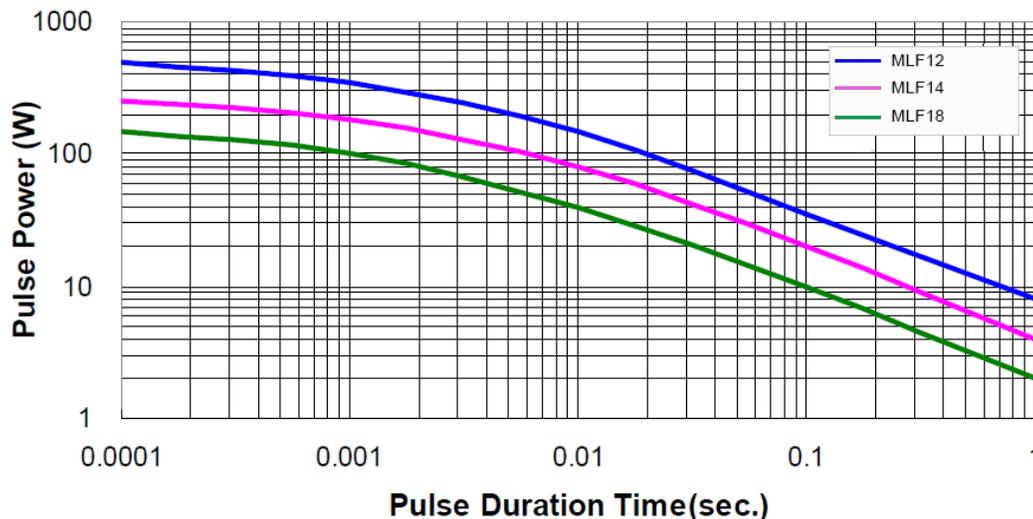


MLFM1 Single Pulse (1 Kohm)

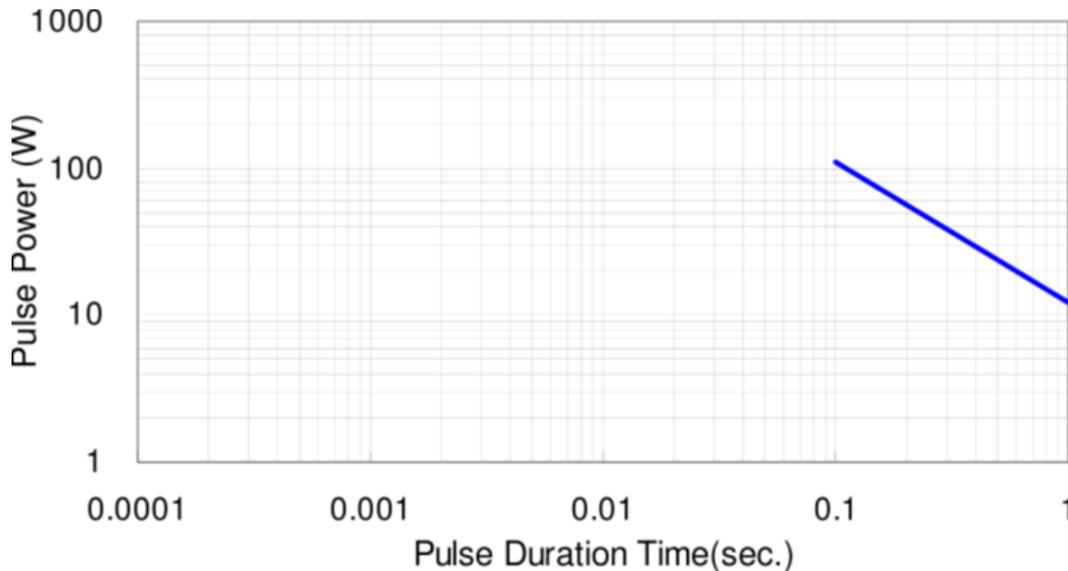

Continuous Pulse


The continuous load graph was obtained by applying repetitive rectangular pulses where the pulse period was adjusted so that the average power dissipated in the resistor was equal to its rated power at 70°C. Again the limit of acceptance was a shift in resistance of less than 1% from the initial value.

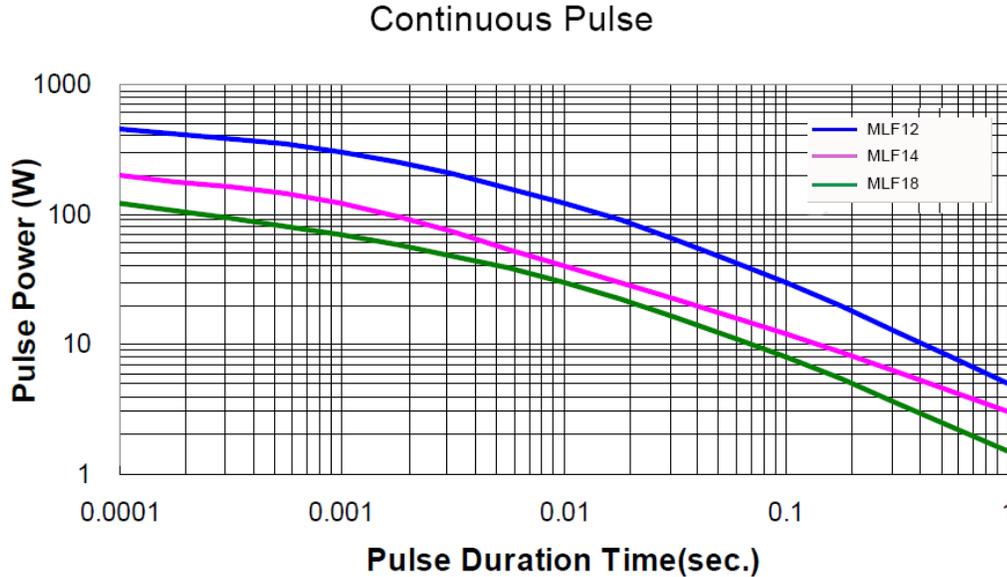


Frequency behavior

Resistors are designed to function according to Ohmic laws. This is basically true of resistors for frequencies up to 100 kHz. At higher frequencies, there is an additional contribution to the impedance by an ideal resistor switched in series with a coil and both switched parallel to a capacitor. The values of the capacitance and inductance are mainly determined by the dimensions of the terminations and the conductive path length.


The environment surrounding components has a large influence on the behavior of the component on the printed-circuit board.

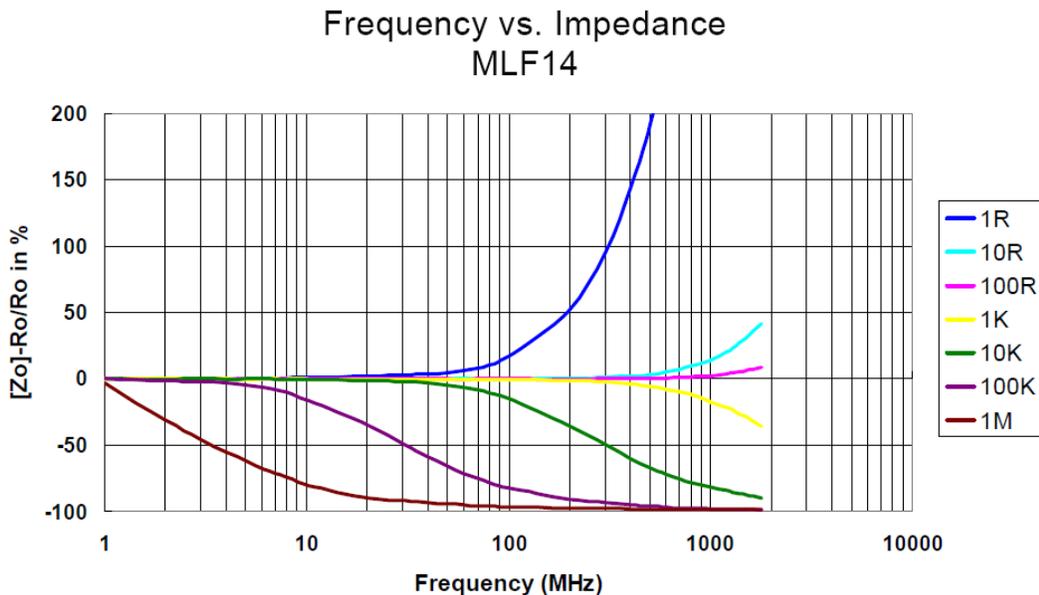


Frequency vs. Phase Angle
MLF14

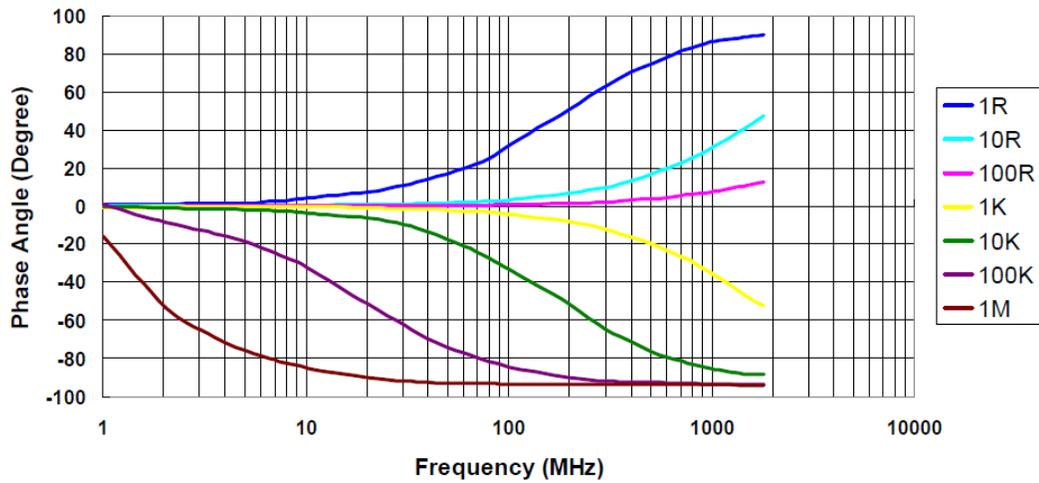

Frequency vs. Impedance
MLF12

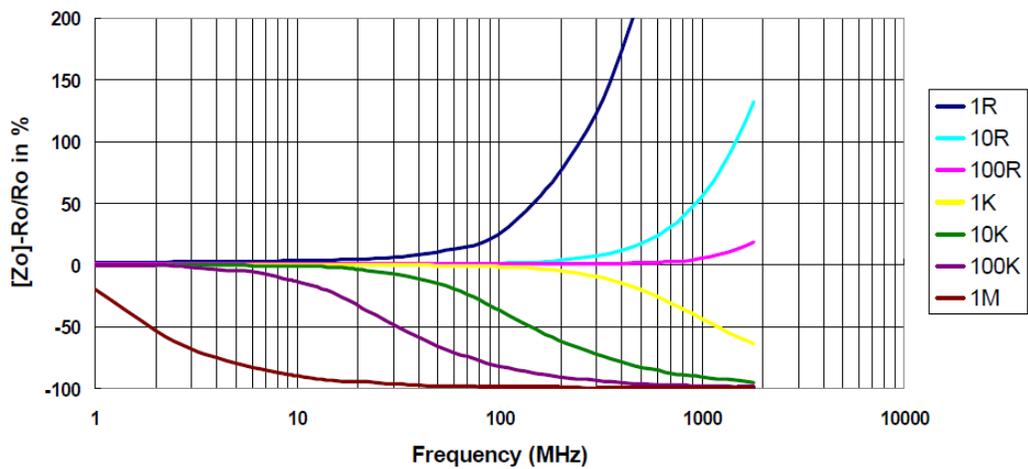


**Frequency vs. Phase Angle
MLF12**

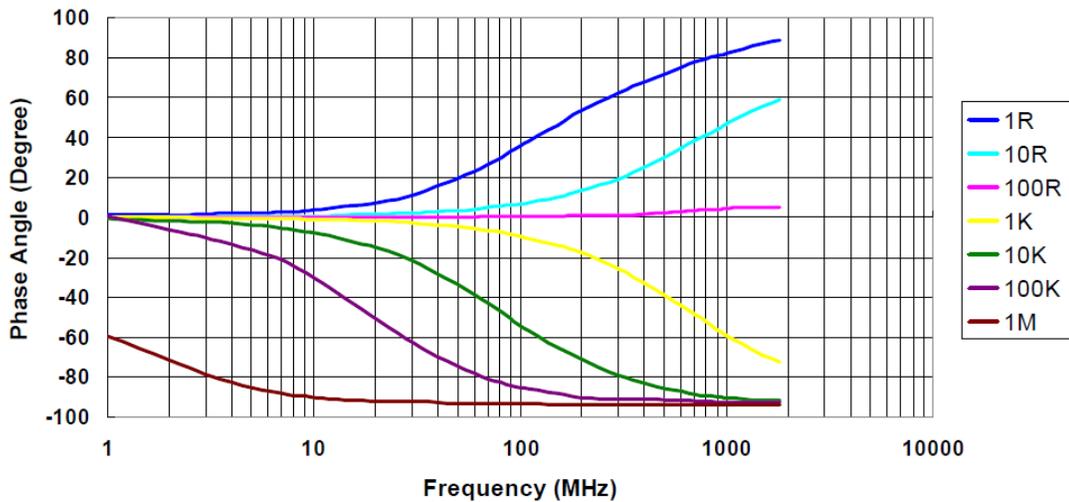


Lightning Surge

Resistors are tested in accordance with IEC 60 115-1 using both 1.2/50us and 10/700us pulse shapes. The limit of acceptance is a shift in resistance of less than 0.5% from the initial value.

1.2/50µs Lightning Surge

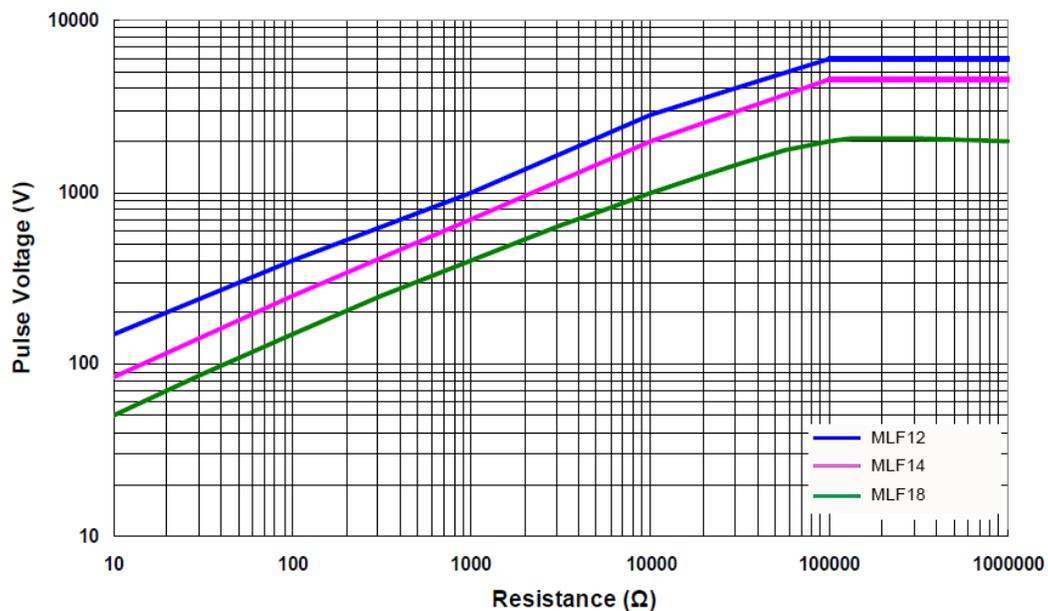

10/700µs Lightning Surge

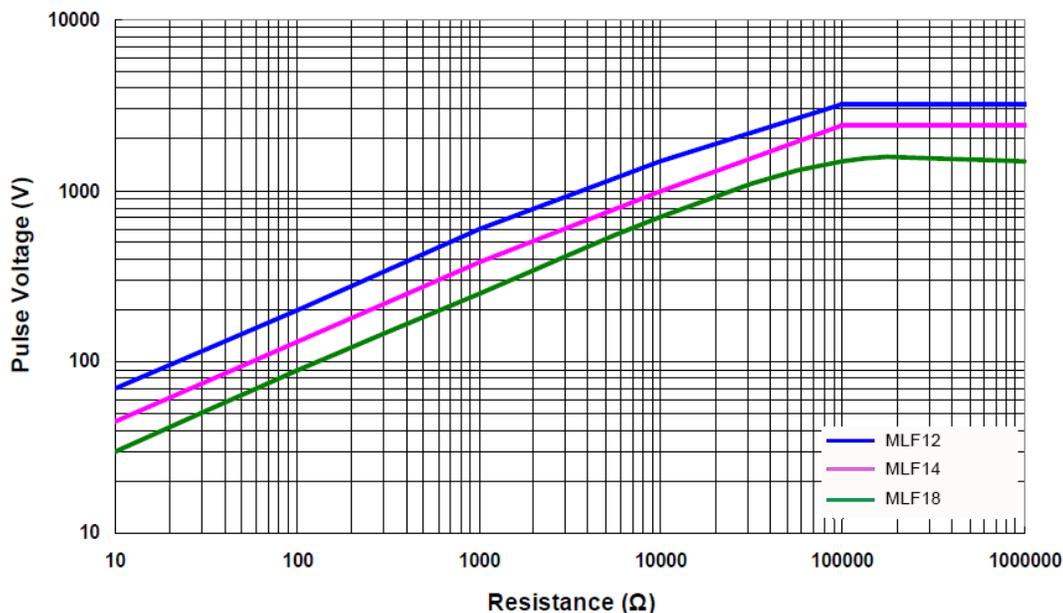

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status						
Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
MLF	Precision Metal Film Melf Resistor	SMD	YES	100% Matte Sn	Always	Always
MLFM	Precision Metal Film Mini Melf Resistor	SMD	YES	100% Matte Sn	Always	Always

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.


Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

How to Order

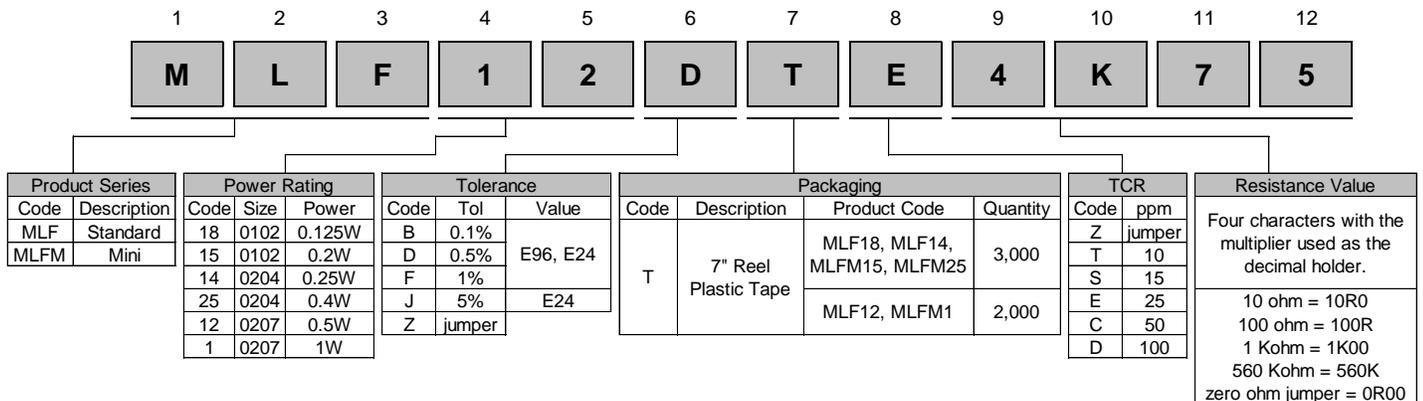

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Metal Film Resistors - Through Hole](#) *category:*

Click to view products by [Stackpole](#) *manufacturer:*

Other Similar products are found below :

[FRN25J330R](#) [FRN50J1R0S](#) [H4100RBYA](#) [H415RBZA](#) [H41K1BYA](#) [H41K5BYA](#) [H41M0BDA](#) [H420R5BCA](#) [H421R5BZA](#) [H4221RBYA](#)
[H424K3BDA](#) [H442K2BDA](#) [H45K62BZA](#) [H4634RBZA](#) [H473R2BZA](#) [H4931KBZA](#) [H8160KFDA](#) [H8274KBZA](#) [H82K0FDA](#) [H82K0FZA](#)
[H87K5DYA](#) [RLR05C1501GPB14](#) [RLR05C6201GS](#) [RLR20C3240FRB14](#) [RLR20C51R0GMB14](#) [RLR32C7R50FMB14](#) [RNC55H4642FPB14](#)
[HR01623J](#) [HR01682J](#) [270-1.69M-RC](#) [LR0204F110R](#) [LR0204F18R](#) [LR0204F20K](#) [LR0204F20R](#) [LR0204F510R](#) [LR1F121R](#) [LR1F133K](#)
[LR1F383R](#) [LR1F3K01](#) [LR1F4K75](#) [LR2F330RJIT](#) [LR2F51R](#) [LR2F910R](#) [ERX-2SZJR20E](#) [SQMR74K7J](#) [FMF-25FTF52-100K](#)
[FRN50J100RS](#) [FRN50J470RS](#) [H4100RBZA](#) [H414R3BZA](#)