



dimensions (tolerance $\pm 0,1\text{mm}$)

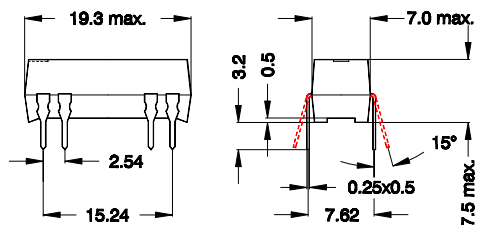

layout 19 D pitch 2,54 / top view



marking

Type
data-code EN 60062

MEDER electronic
DIP24-1B72-19D

coil data	condition	Min.	Typ.	Max.	unit
coil resistance	at 20°C	1800		2200	Ω
nominal voltage			24		VDC
pull-in voltage				16,8	VDC
drop-out voltage		3,6			VDC
return voltage	at 20°C	31,2			
coil voltage	at 60°C			28,5	VDC
nominal power	determined with nominal voltage and rated current		288		mW

contact data 72(Form B/Dry)					
contact material				Ruthenium	
rated power	each combination of the switching voltage and current must not exceed the given rated power			15	W
switching voltage				200	VDC
switching current				1,0	A
carry current				1,25	A
static contact resistance	initial values measured with $1,4 \times AT_{\text{pull-in}}$			150	m Ω
Insulation resistance	RH Ω 45%	10^{10}			Ω
breakdown voltage		250			VDC
capacitance	without test coil			0,3	pF

relay data					
insulation resistance coil-contact		10^{11}			Ω
insulation voltage coil-contact		1,5			kVDC
shock	$\frac{1}{2}$ sine wave, duration 11ms			150	g
vibration	50 – 2000Hz			10	g
operate time including bounce	measured at $1,4 \times AT_{\text{pull-in}}$		0,5		ms
release time			0,1		ms

general data					
operating temperature		-20		70	°C
storing temperature		-35		95	°C
soldering temperature	10 sec. at			260	°C
cleaning				fully sealed	
material of case				mineral-filled epoxy	
material of pins				Cu-alloy tinned	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [StandexMeder](#) manufacturer:

Other Similar products are found below :

[1305290063](#) [1318109013](#) [1605185000](#) [1612185000](#) [1924183110](#) [2112902025](#) [2113501015](#) [2118001015](#) [2118300150](#) [2119401015](#)
[2206040001](#) [2206060001](#) [2206060002](#) [2206080001](#) [2227000000](#) [2233902054](#) [2233903054](#) [2244711054](#) [2272711054](#) [2500000004](#)
[2500000005](#) [3105171210](#) [3205001151](#) [3205100112](#) [3212200012](#) [3215272021](#) [3303172171](#) [3305100071](#) [3305100074](#) [3305100171](#)
[3305185378](#) [4003004003](#) [4003004015](#) [4003004025](#) [4003004026](#) [4003004030](#) [4003004032](#) [4205187075](#) [4205187875](#) [4212187175](#)
[4305180075](#) [4305180175](#) [8032186050](#) [8524183002](#) [8805271800](#) [8812185100](#) [8812266100](#) [9113711054](#) [9118390054](#) [9150100022](#)