


SATA PCIe Card - 2 Port PCIe SATA Expansion Card - 6Gbps - Full/Low Profile - PCI Express to SATA Adapter/Controller - ASM1062R SATA RAID - PCIe to SATA Converter - TAA

Product ID: 2P6GR-PCIE-SATA-CARD

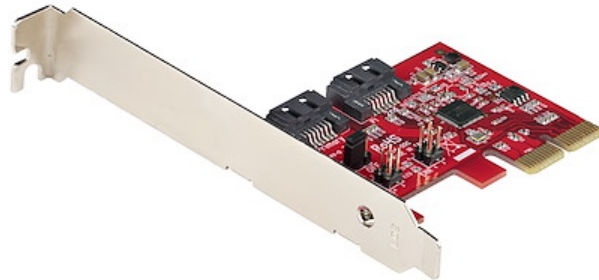

This 2-port SATA III (6Gbps) controller with RAID enables you to add two SATA 6Gbps Hard Drives (HDDs) or Solid State Drives (SSDs) to your computer system or server via an available PCIe x2 card slot, and build the disks into a hardware RAID array. The card supports SATA III and PCI-Express 2.0 Specifications, and can also be used to add optical disk drives (ODD) like CD/DVD/Blu-ray to your computer.

This RAID controller supports different hardware RAID configurations to meet your specific application:

- RAID 0 (striped) - Splits your data evenly across both drives to increase read/write performance, while also increasing the size of your volume storage capacity to the combined total of both drives.
- RAID 1 (mirrored) - Exactly copies your data on both drives to provide data redundancy, so your data will be safely backed-up should one of the drives fail.
- SPAN (big) - Combines both drives into a single array to increase the size of your volume storage capacity to the combined total of both drives.
- JBOD (Just a bunch of disks) - Exposes both drives as individual devices to be treated independently.

Featuring the ASM1062R controller, this SATA card enables the connection of two high-performance SATA 6Gbps drives with a combined total throughput of up to 8Gbps. The SATA drives are connected via two individual SATA ports located on the card (SATA cables sold separately).


The controller card is widely supported across all popular operating system platforms including Windows (7, 8, 10, 11), macOS (10.10 and above) and Linux (2.6.32 and above). Plus, with support for PCIe 2.0 and SATA III Specifications this card ensures backward compatibility with previous generations (SATA I/II, PCIe 1) at lower performance.

For managing and configuring RAID functionality, the card supports OS booting on Windows & Linux for BIOS level RAID setup & configuration, and includes an application on Windows for OS level RAID setup, configuration & monitoring. On macOS only software RAID is supported using RAID Assistant.

The SATA controller card features plug-and-play installation and can be installed in a full-profile or low-profile computer systems with the full-profile bracket preinstalled, and an interchangeable low-profile (half-height) bracket included.

2P6GR-PCIE-SATA-CARD is backed by a StarTech.com lifetime warranty and free lifetime 24/5 North American based, multi-lingual support.

Certifications, Reports and Compatibility

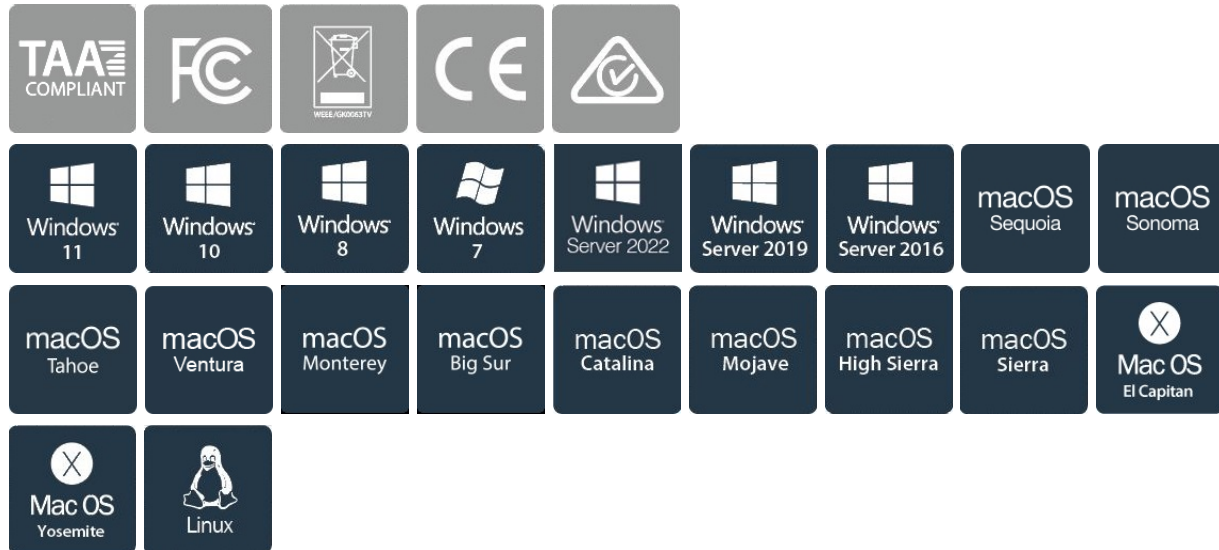

Applications

- Add two 6Gbps drives to your desktop computer or server
- Manage your drives and build hardware RAID arrays in RAID 0, RAID 1, SPAN or JBOD configurations

Features

- **HIGH-PERFORMANCE:** Add two SATA III 6Gbps ports to your desktop computer or server using a PCI Express x2 slot to connect SATA drives (HDD/SSD); 6Gbps per port; Built-in hardware RAID controller to off-load host CPU for maximum performance
- **VERSATILE HARDWARE RAID CONFIGURATIONS:** The PCIe card supports Hardware RAID modes: RAID 0/RAID 1/SPAN (Big Disk); The card can also be used without RAID in JBOD (Just a Bunch of Disks) supporting HDD, SSD, and Optical Disk Drives (Blu-Ray/DVD/CD ROM/RW)
- **COMPATIBILITY:** PCIe 2.0; Plug-and-play setup on Windows (7+), macOS (10.10+), Linux (2.6.32+); OS booting on Windows & Linux for BIOS level RAID setup/config; Incl Windows app for OS level RAID setup/config & monitoring; Software RAID only on macOS
- **APPLICATIONS:** Setup in full or low-profile PCI-e slot (full-profile bracket installed, low-profile incl); Ideal for laboratories, performance CAD or Audio/Video work stations, data banks & schools; Upgrade computer systems with

Hardware RAID & SATA 6Gbps

- STARTECH.COM ADVANTAGE: IT professionals choice for over 30 years; This SATA PCIe expansion adapter controller card converter is backed for life by StarTech.com, including free 24/5 North America based multi-lingual tech support

General

UPC	065030893169
Package Quantity	1
Warranty	Lifetime

Special Notes / Requirements

Special Notes	Booting an OS from this card is not supported. This card is only supported in Legacy BIOS Environments Management utility provided is only compatible with Windows 7 and up On macOS only software RAID is supported
---------------	--

Physical & Environmental

Color	Red
Product Length	2.8 in [71.0 mm]
Product Width	0.7 in [18.0 mm]
Product Height	4.8 in [121.0 mm]
Weight of Product	1.2 oz [33.0 g]
Operating Temperature	0C to 85C (32F to 185F)
Storage Temperature	-25C to 85C (-13F to 185F)
Humidity	20~80% RH

Performance

Maximum Data Transfer Rate	6 Gbps
TRIM Support	Yes
S.M.A.R.T. Support	Yes

4Kn Support	Yes
SATA Type and Rate	SATA III (6 Gbps)
Port Multiplier	Yes
RAID	Yes

Hardware

Number of Ports	2
Interface	SATA
Bus Type	PCI Express
Card Type	Standard Profile (LP bracket incl.)
Industry Standards	Serial ATA 3.0 specification - SATA I/II/III (1.5/3/6Gbps) PCI Express Base Specification Revision 2.0
Chipset ID	ASMedia - ASM1062R
LED Indicators	2 - Header, for drive activity LEDs

Packaging & In-the-Box

Included in Package	1 - SATA Controller Card 1 - Full-Profile Bracket (Installed) 1 - Low-Profile Bracket 1 - Quick-Start Guide
Package Width	6.9 in [175 mm]
Package Depth	5.7 in [144 mm]
Package Height	1.3 in [34 mm]
Shipping (Package) Weight	3.9 oz [110 g]

Connector(s)

Connector 1 (Quantity)	1
Connector 1	PCI Express x2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) ***category:***

Click to view products by [Startech](#) ***manufacturer:***

Other Similar products are found below :

[9441560000](#) [73-546-001](#) [ADAM-4541-C](#) [USB-CARD-READER](#) [USB-RS485](#) [USB-SATA](#) [TD501D232H](#) [RSM232D](#) [TD502D232H](#) [RS232](#)
[TO RS485](#) [TD302D232H](#) [TD501D232H](#) [RSM232](#) [RSM232D](#) [TD301D232H](#) [TD302D232H](#) [TD502D232H](#) [SAVAK-58](#) [SAVKABELCL-24](#)
[20270](#) [20294](#) [30255](#) [50260](#) [20295](#) [20277](#) [50261](#) [EUR0001H](#) [ZHB2301G](#) [30346](#) [KS-308A](#) [KS-302A](#) [KS-304A](#) [KS-1041UA](#) [KS-1021UA](#)
[CEHBB](#) [66255](#) [50985](#) [4000-68512-0940003](#) [GPS50M](#) [2200002208](#) [4000-68112-1220000](#) [44110](#) [4000-68000-1300000](#) [4000-68512-4040001](#)
[446139](#) [60004-006](#) [2200002207](#) [1020882](#) [1021056](#) [1021058](#)