

4K HDMI Extender Over CAT5/CAT6 Cable, 4K 60Hz HDR Video Extender Up to 230ft (70m), HDMI Over Ethernet Cabling, S/PDIF Audio Out, HDMI Transmitter and Receiver Kit

Product ID: 4K70IC-EXTEND-HDMI



This HDMI Extender transmits a 4K 60Hz HDMI audio video signal up to 230ft (70m) over Category 5e/6 Ethernet Cabling. The converter kit includes the transmitter and receiver units for a complete point-to-point solution.


This HDMI extender supports resolutions of up to 4K 60Hz with zero latency over a single Ethernet cable. The UHD HDMI Extender supports HDMI 2.0 and 4:4:4 chroma subsampling, which ensures clear and stable video output.

Connect the power adapter to the transmitter or receiver to power both units, using Power-over-Cable (PoC). Use an IR remote control to communicate with the source device, from the location of the receiver unit, using the IR extension kit.

The 4K HDMI Extender features an HDMI output on the transmitter unit, enabling the connection of an HDMI display or to connect additional video extenders - to establish a cascade connection. Plug-and-play installation with no additional software or drivers required. Attach the mounting brackets to the metal housing and to a wall, ceiling, or to the underside of a table, facilitating a multitude of professional installation options. The rubber feet protect the mounting surface and isolate the units from vibration.

This product is backed for 2-years, including free lifetime 24/5 multi-lingual technical assistance.

Certifications, Reports and Compatibility

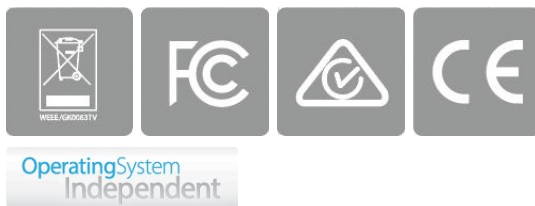

Applications

- Extend a 4K 60Hz HDMI signal in offices, building lobbies, shopping centers, airports, and more
- Extend a HDMI signal to locations that lack power outlets
- Display the same image on a display locally and to a remote location

Features

- **HDMI OVER ETHERNET CABLING:** 4K HDMI Extender transmits 4K 60Hz (4:4:4) video signals and 7.1ch audio up to 230ft (70m) with zero latency over a single CAT5e/6 cable; HDMI 2.0; HDR; HDCP 2.2; HDMI or S/PDIF audio output; DTS and Dolby Digital audio
- **POWER-OVER-CABLE:** Included power adapter connects to the HDMI Extender Kit's transmitter and powers the receiver for areas where power outlets may be limited; Power is delivered to the receiver over a CAT5e/6 cable, using Power-over-Cable (PoC)
- **VERSATILE FUNCTIONALITY:** Transmitter features an HDMI output which can be used to connect a local display or to connect cascaded HDMI extenders; HDMI extender over Ethernet Cable is ideal for digital signage in malls, stadiums, and hospitals
- **IR EXTENSION:** HDMI over CAT5/CAT6 Extender includes an IR Control Extension Kit, with 1x IR Blaster and 1x IR Receiver, to control an IR device from the receiver; IR Blaster/Receiver feature pre-installed adhesive for convenient installation
- **INSTALLATION OPTIONS:** Durable metal housing, 8kV air and 6kV contact ESD protection, suitable for a variety of environments; Included mounting kit and rubber feet provide versatile installation options; No IP configuration, software, or drivers required

General

UPC	065030899208
Package Quantity	1
Warranty	2 Years

Power

Power Source	AC Adapter Included
Input Voltage	100 - 240 AC
Input Current	0.3A
Output Voltage	12V DC
Output Current	1
Center Tip Polarity	Positive

Plug Type	M
Power Consumption	0.1W

Physical & Environmental

Color	Black
Material	Metal
Product Length	4.2 in [106.0 mm]
Product Width	3.9 in [99.0 mm]
Product Height	1.0 in [26.0 mm]
Weight of Product	7.4 oz [210.0 g]
Operating Temperature	-20C to 60C (-4F to 140F)
Storage Temperature	-30C to 70C (-22F to 158F)
Humidity	0% - 90% RH (non-condensing)

Performance

HDR Support	HDR10
Max Distance	70m [230ft]
Audio Specifications	HDMI - 7.1 Channel Audio
Maximum Digital Resolutions	3840x2160 @ 60Hz
Supported Resolutions	3840x2160 (4K) @ 60Hz 2560x1600 @ 60Hz 1920x1200 @ 60Hz 1920x1080 (1080p) 1280x720 (720p)
	<i>*Other resolutions and refresh rates may be available</i>
Wide Screen Supported	Yes

Hardware

Cabling	Cat 5e UTP or better
Audio	Yes
Rack-Mountable	No
Cascadable	Yes
LED Indicators	1 - Flashing Blue: Power connected, but no HDMI input signal is detected Solid Blue: Power connected, and a HDMI input signal is detected

Packaging & In-the-Box

Included in Package	1 - Local HDMI Transmitter Unit 1 - Remote HDMI Receiver Unit 1 - IR Blaster 1 - IR Receiver 8 - Rubber Feet 1 - Mounting Kit 1 - Power Adapter 1 - Quick-Start Guide
Package Width	7.2 in [182 mm]
Package Depth	9.4 in [240 mm]
Package Height	3.3 in [83 mm]
Shipping (Package) Weight	32.2 oz [912 g]

Connector(s)

Host Connector 1 (Quantity)	1
Host Connector 1	HDMI
Host Connector 2 (Quantity)	1
Host Connector 2	HDMI

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [Startech](#) manufacturer:

Other Similar products are found below :

[9441560000](#) [73-546-001](#) [ADAM-4541-C](#) [USB-CARD-READER](#) [USB-RS485](#) [USB-SATA](#) [TD501D232H](#) [RSM232D](#) [TD502D232H](#) [RS232](#)
[TO RS485](#) [TD302D232H](#) [TD501D232H](#) [RSM232](#) [RSM232D](#) [TD301D232H](#) [TD302D232H](#) [TD502D232H](#) [SAVAK-58](#) [SAVKABELCL-24](#)
[20270](#) [20294](#) [30255](#) [50260](#) [20295](#) [20277](#) [50261](#) [EUR0001H](#) [ZHB2301G](#) [30346](#) [KS-308A](#) [KS-302A](#) [KS-304A](#) [KS-1041UA](#) [KS-1021UA](#)
[CEHBB](#) [66255](#) [50985](#) [4000-68512-0940003](#) [GPS50M](#) [2200002208](#) [4000-68112-1220000](#) [44110](#) [4000-68000-1300000](#) [4000-68512-4040001](#)
[446139](#) [60004-006](#) [2200002207](#) [1020882](#) [1021056](#) [1021058](#)