


4-Port M.2 to SATA Adapter Card, M.2 PCIe 3.0 to SATA HDD/SSD Expansion Card, ASM1064 Chipset, M.2 NVMe to 4x HDD/SSD for Windows/macOS/Linux, TAA

Product ID: 4P-SATA-M2-ADAPTER

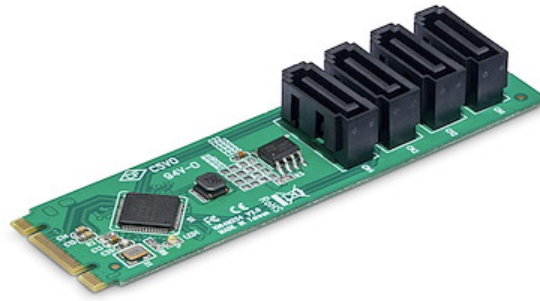

Add up to four independent SATA drives to a desktop via a single 2280 M.2 drive slot, maintaining SATA 6Gbps read/write speeds per drive.


This setup can be used with modern motherboards or external enclosures that feature a PCIe-based M.2 slot, allowing for a cost-effective expansion of storage capabilities. Four 19.6-inch (50cm) SATA cables are included to connect the HDDs or SSDs for quick installation.

The drivers auto-install in most major operating systems, including Windows 8 and later, macOS, and Linux. This adapter card is compatible with all hardware platforms, such as Intel and AMD, and supports software storage management, including Microsoft's Storage Spaces.

This storage expansion card is ideal for data storage, backups, NAS setups, photographers, videographers, and content creation, where large storage capacity and reliability is required.

The 4-Port M.2 NVMe to SATA Adapter supports TRIM, SMART data pass-through, SATA I/II/III, and PCI Express 3.0.

Certifications, Reports and Compatibility

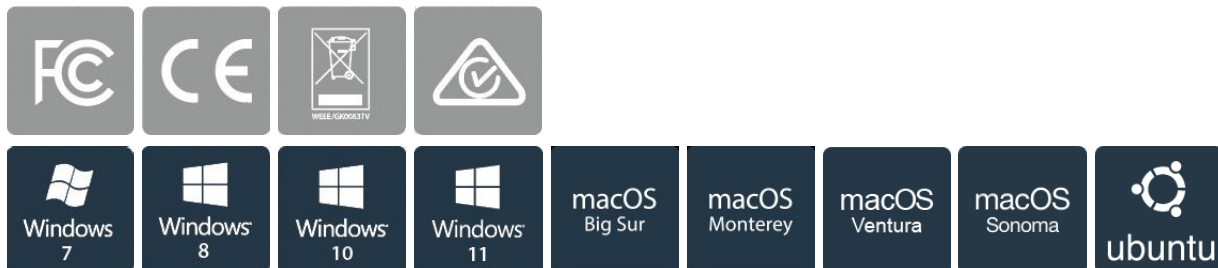



Applications

- Use with modern motherboards or external enclosures that feature an M.2 slot to cost-effectively expand storage capabilities
- Ideal for data storage, backups, NAS setups, photographers, videographers, and content creation

Features

- **INCREASE STORAGE:** Expand storage capacity and flexibility using minimal connections and the small M.2 footprint; Add up to four independent SATA drives to a desktop via a single 2280 M.2 drive slot while maintaining SATA 6Gbps read/write speeds per drive
- **UNIVERSAL COMPATIBILITY:** Drivers auto-install in most major operating systems including Windows 8 & up, macOS, and Linux; Compatible with all hardware platforms such as Intel/AMD; Supports software storage management including Storage Spaces (Microsoft)
- **APPLICATIONS:** Use with modern motherboards or external enclosures that feature an M.2 slot to cost-effectively expand storage capabilities; Ideal for data storage, backups, NAS setups, photographers, videographers, and content creation
- **TECH SPECS:** ASMedia ASM1064 chip supports TRIM, SMART data, SATA I/II/III, and PCI Express 3.0; Includes 4x 19.6in (50cm) SATA cables to connect the HDDs/SSDs; Compatible with PCIe-based B or M-key M.2 slots; NOTE: Not compatible with SATA M.2 drive slots
- **THE IT PRO'S CHOICE:** Designed and built for IT Professionals, this 4-port M.2 to SATA Adapter Card is backed for 2-years, including free lifetime 24/5 multi-lingual technical assistance

General

UPC	065030903745
Warranty	2 Years

Special Notes / Requirements

Special Notes	This product is only compatible with PCIe-based B-key or M-key M.2 drive slots
	This product is not compatible with SATA-based M.2 drive slots
	The included SATA cables are 19.6-inches (50cm) in length

Power

	Power Source	Bus Powered
Physical & Environmental		
	Color	Green
	Product Length	3.1 in [80.0 mm]
	Product Width	0.9 in [22.0 mm]
	Product Height	0.4 in [11.0 mm]
	Weight of Product	0.3 oz [8.0 g]
	Operating Temperature	0C to 70C (32F to 158F)
	Storage Temperature	-20C to 80C (-4F to 176F)
	Humidity	20% ~ 80% RH
Performance		
	TRIM Support	Yes
	S.M.A.R.T. Support	Yes
	Port Multiplier	Yes
	RAID	No
	Hot Swap Capability	Yes
	MTBF	68,555,579 Hours
Hardware		
	Number of Ports	4
	Interface	M.2 PCIe (x4 PCIe)
	Bus Type	PCI Express
	Port Style	Integrated on Card
	Chipset ID	ASMedia ASM1064
	LED Indicators	1 - Solid Green: Power On 1 - Off: Power Off
Packaging &		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Development Tools](#) ***category:***

Click to view products by [Startech](#) ***manufacturer:***

Other Similar products are found below :

[XR33052IDEVB](#) [XR21B1424IV64-0A-EVB](#) [P0551](#) [5346](#) [4901](#) [LIME2-SHIELD](#) [USB TO TTL](#) [USB TO RS485](#) [PL2303 USB UART Board \(type A\) V2](#) [USB-CAN-A](#) [MIKROE-5492](#) [5964](#) [TJA1145A-EVB](#) [2200002205](#) [Si86P541-KIT](#) [MXL86211C-EVK-1](#) [KIT6X02AP2T1](#) [MXL86112C-EVK-1](#) [103030295](#) [MIKROE-2335](#) [KIT_MINIWIGGLER_3_USB](#) [KITXMC4XCOMETH001TOBO1](#) [SI871XSOIC8-KIT](#) [1764](#) [1833](#) [1862](#) [EVALISO1I811TTOBO1](#) [EVB81107-A1](#) [EVB-USB82514](#) [ATAB663231A-V1.2](#) [2264](#) [PS09-EVA-KIT](#) [BOB-13263](#) [BP359C](#) [ORG4572-R01-UAR](#) [XR21B1420IL28-0A-EVB](#) [28030](#) [MIKROE-2750](#) [292](#) [DFR0065](#) [DFR0077](#) [DFR0504](#) [TEL0010](#) [TEL0038](#) [TEL0070](#) [ASI4UEVBV2P1](#) [MIKROE-2517](#) [MM930Mini](#) [PCI-7841](#) [BOB-13830](#)