

150m (492ft) USB 2.0 Extender over Cat5e/Cat6 Ethernet Cable, Externally Powered USB Extender via RJ45/Network Cable, USB Over Ethernet Cable Extender/Adapter - TAA

Product ID: C15012-USB-EXTENDER



Extend a USB 2.0 connection up to 492 ft (150 m) with this USB Extender Kit. Connect the transmitter to the receiver, using existing Ethernet cabling that is Cat5e or better (e.g., Cat 6, 6a, etc.). No software or configuration is required. Conveniently control remote USB devices in warehouses, classrooms, board rooms, and other long-range application environments.


This USB Extender Kit enables you to exceed the limitations posed by traditional USB cable lengths, to establish long-range USB connections. Use this kit for a wide variety of applications such as remote surveillance and monitoring with a webcam (up to 1080p resolution), controlling machines at a distance, remote printing, connecting retail barcode scanners, and many other applications. In addition, the remote unit is connected to a power source, using the included power adapter, for applications requiring USB bus power.

The local and remote units feature a metal exterior for extra protection and longevity in harsher environments. With dimensions of only 1.3 x 1.0 x 2.65 in (32.2 x 25.4 x 67.3 mm), both units are very compact, allowing for installations in tight spaces.

The USB over Ethernet cable extender kit is compatible with any operating system and does not require any additional software to work. Set up the units by connecting them on a point-to-point connection, using your existing Ethernet cabling (Cat5e or better). This kit is not compatible with network switches and routers. The Extender is compatible with USB 2.0, USB 1.1, and USB 1.0 peripherals.

The C15012-USB-EXTENDER is TAA compliant and backed for 2-years by StarTech.com, including free lifetime 24/5 multi-lingual technical assistance.

Certifications, Reports and Compatibility

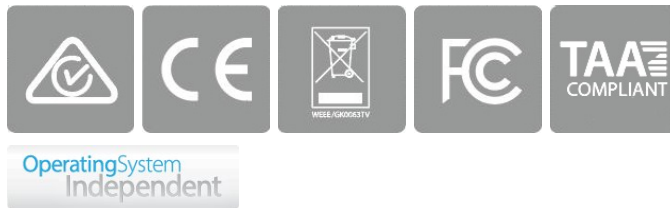

Applications

Features

- **ULTRA LONG RANGE USB EXTENDER:** Extend a USB 2.0 connection up to 492 ft (150 m) over an Ethernet cable (CAT5e, CAT6, or higher) with data transfer rates up to 480Mbps; Power, Link & Activity status LEDs; For Webcams and USB peripherals
- **POWERED USB EXTENDER KIT:** The USB extender over Cat5/Cat6 cable (RJ45) includes a power adapter for the Receiver while the Transmitter is bus-powered. The Receiver's USB port provides 5V 500mA
- **DURABLE & COMPACT:** Durable metal construction for high wear and tear environments; Transmitter & Receiver each feature the same small form factor 1.3 x 1x 2.65 in (32 x 25 x 67.3 mm); Rubber feet help prevent sliding; 2 ft (61 cm) USB host cable included
- **PLUG-AND-PLAY:** The extender features driverless installation and is compatible w/ major operating systems incl. Windows, macOS, Linux; Compatible with USB 2.0/1.1/1.0; Point-to-Point, Does not work through network/LAN equipment (router, switch, etc.)
- **THE IT PRO'S CHOICE:** Designed and built for IT Professionals, this TAA USB 2.0 extender kit is backed for 2-years, including free lifetime 24/5 multi-lingual technical assistance

General

UPC	065030893176
Package Quantity	1
Warranty	2 Years

Special Notes / Requirements

System and Cable Requirements	A host computer with an available USB-A port (USB Type-A) Receiver and Transmitter must be connected in a point-to-point setup. The product does not work when connected via networking equipment. Terminated RJ45 Cat5e (or better) Ethernet cable The Ethernet cable must comply with the EIA/TIA-568-A or B Standard.
-------------------------------	--

Power

Power Source	AC Adapter Included
Input Voltage	100 - 240 AC
Input Current	0.6 A
Output Voltage	5 DC
Output Current	3
Center Tip Polarity	Positive
Plug Type	H
Power Consumption	15 W

Physical & Environmental

Color	Black
Material	Metal
Product Length	1.3 in [32.2 mm]
Product Width	2.6 in [67.3 mm]
Product Height	1.0 in [25.4 mm]
Weight of Product	6.1 oz [173.0 g]
Operating Temperature	32F ~ 122F (0C to 50C)
Storage Temperature	-4F ~ 158F (-20C to 70C)
Humidity	10% ~ 90%

Performance

Maximum Data Transfer Rate	480 Mbps
Max Distance	150m [492ft]

Hardware

Number of Ports	1
Cabling	Cat 5e UTP or better

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) ***category:***

Click to view products by [Startech](#) ***manufacturer:***

Other Similar products are found below :

[9441560000](#) [73-546-001](#) [ADAM-4541-C](#) [USB-CARD-READER](#) [USB-RS485](#) [USB-SATA](#) [TD501D232H](#) [RSM232D](#) [TD502D232H](#) [RS232](#)
[TO RS485](#) [TD302D232H](#) [TD501D232H](#) [RSM232](#) [RSM232D](#) [TD301D232H](#) [TD302D232H](#) [TD502D232H](#) [SAVAK-58](#) [SAVKABELCL-24](#)
[20270](#) [20294](#) [30255](#) [50260](#) [20295](#) [20277](#) [50261](#) [EUR0001H](#) [ZHB2301G](#) [30346](#) [KS-308A](#) [KS-302A](#) [KS-304A](#) [KS-1041UA](#) [KS-1021UA](#)
[CEHBB](#) [66255](#) [50985](#) [4000-68512-0940003](#) [GPS50M](#) [2200002208](#) [4000-68112-1220000](#) [44110](#) [4000-68000-1300000](#) [4000-68512-4040001](#)
[446139](#) [60004-006](#) [2200002207](#) [1020882](#) [1021056](#) [1021058](#)