

2-Port Dual-Monitor DisplayPort Cable KVM Switch, 4K 60Hz, Compact KVM with 5ft/1.5m USB-A/DisplayPort/Audio Integrated Cables, Bus Powered - Remote Push Button/Hotkey Switching

Product ID: C2-DD46-UA2-CBL-KVM



This Dual-Monitor KVM Switch enables users to switch between two USB-A and DisplayPort enabled desktops, sharing dual-4K 60Hz DisplayPort monitors, a keyboard and mouse, and audio input/output devices.

The KVM switch is bus powered and features built-in dual-DisplayPort, USB-A, and 3.5mm Audio Input/Output cables. This ensures compatibility and performance between the KVM switch, monitors, and peripherals - without the need to select and purchase the cables required for those connections.

The 2-port KVM switch is compatible with all operating systems, including Windows, macOS, ChromeOS, and Linux. The KVM works with all hardware platforms including Intel, AMD, and Apple M1/M2.


The KVM switch offers two options to switch between hosts - a remote push button or hotkey commands, using the downloadable software. The remote push button includes a 1.5m cable for optimal placement in the setup. Independent audio switching can be achieved through the software, utilizing keyboard shortcuts (i.e., hotkeys), ensuring uninterrupted audio when switching between host devices.

Developed to improve performance and security, StarTech.com Connectivity Tools is the only software suite on the market that works with a wide range of IT connectivity accessories. The software suite includes:

- Advanced Windows Layout Utility: Setup and save custom windows layouts.
- MAC Address Pass-Through Utility: Improve network security.
- USB Event Monitoring Utility: Track and log connected USB devices.
- Wi-Fi Auto Switch Utility: Enable users to quickly access faster network speeds via wired LAN.

For more information and to download the StarTech.com Connectivity Tools application, please visit:
www.startech.com/connectivity-tools

Certifications, Reports and Compatibility

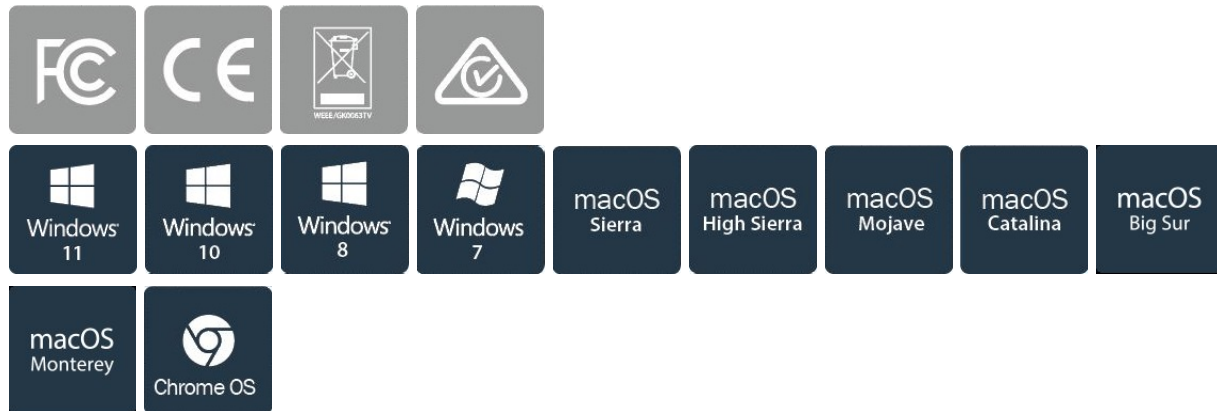

Applications

- Ideal for sharing peripherals between home and office equipment in a home office
- Great for applications like CAD/CAM, video editing, and content creation
- Switch dual displays, mouse, keyboard, and audio peripherals between two desktop computers

Features

- **DUAL 4K 60HZ MONITOR KVM SWITCH:** Enables switching between two USB-A and DisplayPort-enabled desktops to share a mouse, keyboard, audio, and dual-4K 60Hz DisplayPort displays
- **READY-TO-USE:** Small form factor, integrated cables, and no external power adapter enable rapid deployment; Bus-powered KVM switch features integrated 5ft/1.5m host cables to allow for extended reach, reducing port and connector strain
- **SWITCHING OPTIONS:** Remote Push Button and Hotkey Commands enable switching between hosts; Remote push button has a 1.5m cable for ideal placement in the setup; Downloadable software allows listening to audio from one computer, while controlling the other
- **COMPATIBILITY:** 2-Port Dual-Monitor KVM Switch works with any operating system including Windows, macOS, Linux, and ChromeOS; Compatible with all hardware platforms such as Intel and AMD
- **OUR ADVANTAGE:** Included connectivity tools for IT Pro's and IT help-desk support teams with USB Event Monitoring for logging USB device connections with timestamps, and Windows Layout to restore windows locations upon switching hosts

General

UPC	065030899215
Package Quantity	1

Warranty		2 Years
Special Notes / Requirements		
Special Notes		OS Compatibility refers to the available KVM software only. The KVM can be used without software on any platform.
Power		
Power Source		Bus Powered
Physical & Environmental		
Color		Black
Material		ABS
Cable Length		59.1 in [1500 mm]
Product Length		4.9 in [125.0 mm]
Product Width		3.5 in [90.0 mm]
Product Height		1.0 in [25.0 mm]
Weight of Product		21.2 oz [600.0 g]
Operating Temperature		0C to 40C (32F to 104F)
Storage Temperature		-20C to 60C (-4F to 140F)
Humidity		0% ~ 90% RH (non-condensing)
Performance		
Maximum Data Transfer Rate		480Mbps (USB 2.0)
IP Control		No
Hot-Key Selection		Yes
Port Selection Support		Push Button and Hotkeys/Software
On-Screen Display		No
Auto Scan		10, 20, 30, 40, 50, and 60 seconds
MTBF		419,293 Hours
Audio Specifications		DisplayPort - 2 Channel Audio

	Analog Stereo - 2 Channel Audio
Supported Resolutions	4096x2160 @60Hz
	3840x2160 @60Hz
	5120x1440 @60Hz
	3440x1440 @60Hz
	2560x1440 @60Hz
	2560x1080 @60Hz
	1920x1200 @60Hz
	1920x1080 @60Hz
	<i>Other resolutions may be supported</i>
Video Revision	DisplayPort 1.2
Wide Screen Supported	Yes

Hardware

CAC Support	No
Audio	Yes
Number of KVM Ports	2
Supported Platforms	USB
PC Video Type	DisplayPort
Number of Monitors Supported	2
Rack-Mountable	No
Cables Included	Yes
Chipset ID	SN8P2202SG
Cascadable	No
LED Indicators	1 - Solid Green: Selected PC is Connected
	1 - Blinking Green: Selected PC is Not Detected

1 - Amber LED: Selected Audio Source

**Packaging &
In-the-Box**

Included in Package	1 - KVM Switch
	1 - Quick-Start Guide
Package Width	10.4 in [265 mm]
Package Depth	26.0 in [660 mm]
Package Height	3.8 in [96 mm]
Shipping (Package) Weight	33.6 oz [952 g]

Connector(s)

Host Connector 1 (Quantity)	4
Host Connector 1	DisplayPort
Host Connector 2 (Quantity)	2
Host Connector 2	USB-A (480Mbps, 2.5W)
Host Connector 3 (Quantity)	4
Host Connector 3	3.5mm (3 Conductors, TRS)
Connector 1 (Quantity)	1
Connector 1	3.5mm (3 Conductors, TRS)
Connector 2 (Quantity)	2
Connector 2	DisplayPort
Connector 3 (Quantity)	2
Connector 3	USB-A (480Mbps, 2.5W)
Connector 4 (Quantity)	1
Connector 4	3.5mm (3 Conductors, TRS)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [Startech](#) manufacturer:

Other Similar products are found below :

[9441560000](#) [73-546-001](#) [ADAM-4541-C](#) [USB-CARD-READER](#) [USB-RS485](#) [USB-SATA](#) [TD501D232H](#) [RSM232D](#) [TD502D232H](#) [RS232](#)
[TO RS485](#) [TD302D232H](#) [TD501D232H](#) [RSM232](#) [RSM232D](#) [TD301D232H](#) [TD302D232H](#) [TD502D232H](#) [SAVAK-58](#) [SAVKABELCL-24](#)
[20270](#) [20294](#) [30255](#) [50260](#) [20295](#) [20277](#) [50261](#) [EUR0001H](#) [ZHB2301G](#) [30346](#) [KS-308A](#) [KS-302A](#) [KS-304A](#) [KS-1041UA](#) [KS-1021UA](#)
[CEHBB](#) [66255](#) [50985](#) [4000-68512-0940003](#) [GPS50M](#) [2200002208](#) [4000-68112-1220000](#) [44110](#) [4000-68000-1300000](#) [4000-68512-4040001](#)
[446139](#) [60004-006](#) [2200002207](#) [1020882](#) [1021056](#) [1021058](#)